

FOR REFERENCE

NOT TO BE TAKEN FROM THIS ROOM

MULTICOMPONENT VLE CALCULATIONS

BY UNIQUAC AND UNIFAC

by

ALI AYLÄ

B.S. in Ch.E.

I.T.U. , 1982

Submitted to the Institute for Graduate Studies in
Science and Engineering in partial fulfillment of
the Requirements for the degree of

Master of Science

in

Chemical Engineering

Bogazici University Library



39001100313470

14

BOĞAZIÇI UNIVERSITY

1986

ACKNOWLEDGEMENT

I would like to express my appreciation to my thesis supervisor Prof.Dr.Salih DİNÇER for his continual guidance and helpful criticism throughout the my study.

I also want to express my thanks to Doç.Dr.Fahir Borak, the Chairman of Chemical Engineering Department and all the other members of the Chemical Engineering Department of Boğaziçi University for their valuable assistance.

My thanks are also due to all staff of the Computer Center for their help.

I am also grateful to Nejat Kazan and all my friends and colleagues for their encouragement.

Finally, the thesis is dedicated to my family who gave much more than they could..

ABSTRACT

Vapor-liquid equilibrium data is essential and fundamental for design of separation equipment. If available, experimental data are of course the best, but when such data are not available, the engineer has to apply thermodynamic relations to phase equilibrium calculations.

In this study, since the equations for phase equilibria are complex and require trial and error methods, a computer program was prepared for this purpose. The program uses UNIQUAC and UNIFAC equations for liquid phase nonideality and Peng-Robinson equation for vapor phase nonideality. The program can also perform calculation for systems containing noncondensable components at infinite dilution. Totally 1500 data points of thirty-three binary systems and four ternary systems were studied. The results calculated using UNIQUAC and UNIFAC equations were compared against experimental results. For comparison purposes, the systems were also simulated using Raoult's law.

As a result, it is observed that UNIQUAC and UNIFAC equations are in good agreement with experimental data, mostly

much better than those by Raoult's law. Also, it can be seen that Peng-Robinson equation gives good results for vapor phase nonideality. Unfortunately, the results for condensable-noncondensable systems were not encouraging.

ÖZET

Buhar-sıvı denge verileri ayırma işlemlerinin tasarımı-
mında temel ve önemli bir yer tutmaktadır. Deneysel veriler
her zaman tercih edilmesine rağmen, bunların eksikliğinde,
mühendis faz dengesi hesaplamaları için termodinamik bağıntı-
ları kullanmak zorundadır.

Bu çalışmada, faz dengesi hesaplamaların karışıklığı
ve deneme-yanılma yöntemlerine gereksinim duyulması nedeniyle,
bir bilgisayar programı hazırlanmıştır. Bu program sıvı faz
için UNIQUAC ve UNIFAC eşitliklerini, buhar fazı içinde Peng-
Robinson hal denklemini kullanmaktadır. Program kritik üstü
yoğuşmayan maddeler içeren sistemlerin de faz dengesi hesap-
lamalarını yapabilmektedir. Bu çalışmada outzüç ikili ve dört
adet üçlü sistem yaklaşık 1500 denge noktası için incelenmiş-
tir. UNIFAC ve UNIQUAC eşitliklerinden alınan sonuçlar hem
deneysel verilerle hem de kendi aralarında karşılaştırılmış-
tır. Yine karşılaştırma amacı ile sonuçlar bir kez de Raoult
yasası kullanılarak elde edilmiştir.

Sonuç olarak, UNIQUAC ve UNIFAC eşitliklerinin genelde
deneysel değerlerle iyi uyum sağladığı ve bu sonuçların

Raoult yasası ile alınan sonuçlardan çok daha iyi olduğu gözlenmiştir. Buhar fazın ideallikten sapma durumu için, Peng-Robinson denkleminin çalışılan sistemlerde iyi sonuç verdiği görülmüştür. Fakat kritik üstü maddeler içeren sistemler için alınan sonuçlar, yoğuşabilir sistemler için alınan sonuçlar kadar tatmin edici olmamıştır.

TABLE OF CONTENTS

	<u>Page</u>
ACKNOWLEDGEMENTS	iii
ABSTRACT	iv
ÖZET	vi
TABLE OF CONTENTS	viii
LIST OF FIGURES	x
LIST OF TABLES	xi
LIST OF SYMBOLS	xv
I. INTRODUCTION	1
2. THERMODYNAMICS OF VAPOR-LIQUID EQUILIBRIUM	3
2.1 Symmetric and Unsymmetric Conventions for Normalization	5
2.2 Standart State Fugacity for Condensable and Noncondensable Components	7
2.3 Vapor Phase Nonideality : Fugacity Coefficient	9
2.3.1. Peng-Robinson Equation of State	12
2.4 Liquid Phase Nonideality : Activity Coefficient	16
2.4.1. UNIQUAC Equation	18
2.4.2. UNIFAC Equation	24
3. COMPUTATIONAL METHODS	29
4. RESULTS AND DISCUSSION	41

5.	CONCLUSION AND RECOMMENDATIONS	76
	REFERENCES	78
	APPENDICES	80
APPENDIX A.	ESTIMATION OF THE PHYSICAL PROPERTIES REQUIRED IN THE VLE CALCULATION	81
	A.1. Liquid Molar Volume	
	A.2. Saturation Vapor Pressure	
	A.3. Acentric Factor	
APPENDIX B.	A SAMPLE CALCULATION OF ACTIVITY COEFFICIENTS BY UNIFAC	84
APPENDIX C.	PURE COMPONENT AND COMPONENT INTERACTION PARAMETERS	89
APPENDIX D.	A SAMPLE OUTPUT OF THE PROGRAM VLENC	103
APPENDIX E.	DESCRIPTION AND LISTING OF VLENC AND ITS SUBROUTINES	110

LIST OF FIGURES

FIGURE 3.1.	Program VLENC and its Subroutines	34
FIGURE 3.2.	Flow Diagram for DewT (Program DEWT) and BubbleT (Program BUBT) calculations	35
FIGURE 3.3	Flow Diagram for DewP Calculations (Program DEWP)	36
FIGURE 3.4.	Flow Diagram for BubbleP Calculations (Program BUBP)	37

LIST OF TABLES

TABLE 3.1	The Types of VLE Calculations	30
TABLE 4.1	Bubble T Results for i-Propanol(1)-2,2,4 Trimethyl Pentane(2) System Using UNIQUAC	49
TABLE 4.2	Bubble T Results for i-Propanol(1)-2,2,4 Trimethyl Pentane(2) System Using UNIFAC	49
TABLE 4.3	Dew T Results for i-Propanol(1)-2,2,4 Trimethyl Pentane(2) System Using UNIQUAC	50
TABLE 4.4	Dew T Results for i-Propanol(1)-2,2,4 Trimethyl Pentane(2) System Using UNIFAC	50
TABLE 4.5	Bubble P Results for 2,2,4 Trimethyl Pentane(1)- Toluene(2) System Using UNIQUAC	51
TABLE 4.6	Bubble P Results for 2,2,4 Trimethyl Pentane(1) - Toluene(2) System Using UNIFAC	51
TABLE 4.7	Dew P Results for 2,2,4 Trimethyl Pentane(1) -Toluene(2) System Using UNIQUAC	52
TABLE 4.8	Dew P Results for 2,2,4 Trimethyl Pentane(1) -Toluene(2) System Using UNIFAC	52
TABLE 4.9	Bubble T Results for n-Hexane(1)-Ethanol(2) System Using UNIQUAC	53
TABLE 4.10	Bubble T Results for n-Hexane(1)-Ethanol(2) System Using UNIFAC	53
TABLE 4.11	Dew T Results for N-Hexane(1)-Benzene(2) System Using UNIQUAC	54

TABLE 4.12	Dew T Results for n-Hexane(1)-Benzene(2) System Using UNIFAC	54
TABLE 4.13	Bubble T Results for n-Hexane(1)-Toluene(2) System Using UNIQUAC	55
TABLE 4.14	Bubble T Results for n-Hexane(1)-Toluene(2) System Using UNIFAC	55
TABLE 4.15	Bubble P Results for Benzene(1)-i-Propanol(2) System Using UNIQUAC	56
TABLE 4.16	Bubble P Results for Benzene(1)-i-Propanol(2) System Using UNIFAC	56
TABLE 4.17	Bubble T Results for Methanol(1)-2-Butanone System Using UNIQUAC	57
TABLE 4.18	Bubble T Results for Methanol(1)-2-Butanone(2) System Using UNIFAC	57
TABLE 4.19	Dew T Results for Ethanol(1)-Water(2) System Using UNIQUAC	58
TABLE 4.20	Dew T Results for Ethanol(1)-Water(2) System Using UNIFAC	58
TABLE 4.21	Bubble T Results for Methanol(1)-Water System Using UNIQUAC	59
TABLE 4.22	Bubble T Results for Methanol(1)-Water(2) System Using UNIFAC	60
TABLE 4.23	Bubble T Results for Acetone(1)-Methanol(2)- Water(3) System Using UNIQUAC	61

TABLE 4.24	Bubble T Results for Acetone(1)-Methanol(2) -Water(3) System Using UNIFAC	61
TABLE 4.25	Dew T Results for 2-Butanone(1)-n-Heptane(2) -Toluene(3) System Using UNIQUAC	62
TABLE 4.26	Dew T Results for 2-Butonone(1)-n-Heptone(2) -Toluene(3) System Using UNIFAC	64
TABLE 4.27	Bubble P Results for Methanol(1)-Carbon tetrachloride(2)-Benzene(3) System Using UNIQUAC	66
TABLE 4.28	Bubble P Results for Methanol(1)-Carbontetra chloride(2)-Benzene(3) System Using UNIFAC	66
TABLE 4.29	Dew P Results for Methanol(1)-Carbontetrachloride (2)-Benzene(3).System Using UNIQUAC	67
TABLE 4.30	Dew P Results for Methanol(1)-Carbontetrachloride (2)-Benzene(3) System Using UNIFAC	67
TABLE 4.31	VLE Results for Various Alcohol-Aromatic Binary Systems	68
TABLE 4.32	VLE Results for Various Alkane-Aromatic Binary Systems	68
TABLE 4.33	VLE Results For Various Alkane-Alcohol Binary Systems.	69
TABLE 4.34	VLE Results for Alcohol-Water Binary Systems.	69
TABLE 4.35	VLE Results for Ketone-Alcohol Binary System	69
TABLE 4.36	Results for Ternary Systems	70
TABLE 4.37	VLE Results for Ethanol-Water Systems at different conditions	71

TABLE 4.38	Bubble T Results for Acetone-Water System at Various Pressures	71
TABLE 4.39	VLE Results for Methanol-Water System at Various Pressures	71
TABLE 4.40	Bubble T Results for Acetone(1)-Water(2) System Using UNIQUAC at 13.610 atm.	72
TABLE 4.41	Bubble T Results for Acetone(1)-Water(2) System Using UNIFAC at 13.610 atm.	72
TABLE 4.42	Bubble T Results for Ethanol(1)-Water(2) System Using UNIQUAC at 20.410 atm.	73
TABLE 4.43	Bubble T Results for Ethanol(1)-Water(2) System Using UNIFAC at 20.410 atm.	73
TABLE 4.44	Comparison of Bubble T Results of Acetone-Water System at Various Pressures.	74
TABLE 4.45	Comparison of Bubble T Results of Ethanol-Water System at Various Pressures.	74
TABLE 4.46	Bubble P Results of Nitrogen(1)-n-Butane(2) Binary System	75
TABLE 4.47	Bubble P Results of Hydrogen(1)-n-Hexane(2) Binary System	75
TABLE C.1	UNIQUAC Pure Component Parameters	90
TABLE C.2	UNIQUAC Interaction Parameters	92
TABLE C.3	UNIFAC Functional Group Parameters	95
TABLE C.4	UNIFAC Functional Group Interaction Parameters.	97
TABLE C.5	Peng-Robinson Interaction Parameters	102

LIST OF SYMBOLS

A, B, C	Constants of Antoine Equation
a	A constant defined by Eq.(2.27)
a_{ij}	UNIQUAC or UNIFAC energy parameters.
b	A constant defined by Eq.(2.28)
F	The degrees of freedom in phase rule
\hat{f}_i	Fugacity of component i in solution.
f_i^0	Standart state fugacity of pure component i
G^E	Excess Gibbs free energy
H_i	Henry's constant of solute i .
K	Equilibrium ratio (y/x)
l_i	A constant defined by Eq.2.61
m	Number of phases
N	Number of components
P	Pressure
q_k	Surface parameter in combinatorial part of UNIQUAC.
q'_k	Surface parameter in residual part of UNIQUAC.
Q_k	Group area parameter in UNIFAC
r_k	Volume parameter in UNIQUAC.

R_k	Group volume parameter in UNIFAC.
R	Universal gas constant.
T	Temperature
T_r	Reduced Temperature
U_{ij}	Energy interaction between groups i and j in UNIFAC.
V	Vapor molar volume
\bar{v}_i^L	Partial liquid molar volume.
v_i^L	Liquid molar volume
x	Liquid phase mole fraction
y	Vapor phase mole fraction
z	Compressibility factor.
Z_a	Rackett parameter
z	Coordination number in UNIQUAC and UNIFAC
γ_i	Activity coefficient of component i
ϵ	A parameter in Eq. (A.1.1)
θ_i	Area fraction of component i in combinatorial part of activity coefficient
θ_i'	Area fraction of component i in residual part of activity coefficient
μ_i	Chemical potential of component i in solution
τ_{ij}	Interaction parameter in UNIQUAC

δ_{ij}	Interaction parameter in Peng-Robinson Equation.
$\delta_{ij}^{(0)}, \delta_{ij}^{(1)}$	Parameter for solute i in solvent j .
Ψ_{mn}	Interaction parameter in UNIFAC.
Φ	Segment fraction
ϕ	Fugacity coefficient
$\hat{\phi}_i$	Fugacity coefficient of component i in solution.
α	Scaling factor in Peng-Robinson Equation
ω	Acentric factor

Subscripts

i, j, k	Components i, j , and k in a solution
ij	Characteristic property used for i - j binary
c	Critical property

Superscript

L	Liquid phase
m	m 'th phase
s	Saturation conditions
V	Vapor phase

I. INTRODUCTION

Separation of fluid mixtures constitutes one of the main tasks of chemical engineering. Most large scale separations are achieved by classical phase contacting operations : distillation, absorption, stripping and extraction. Design of equipment for such operations requires favorable relationships between the equilibrium states of two or more phases for their success.

The possible number of liquid and vapor mixtures in technological processes is incredibly large, and it is unreasonable to expect the experimental vapor-liquid equilibria will ever be available for a significant fraction of this number. Further, obtaining good experimental data requires appreciable experimental skill, experience, and patience. It is, therefore, an economic necessity to consider techniques for calculating phase equilibria.

Multicomponent vapor-liquid equilibrium calculations require iterative schemes on account of the complex composition functionality implicit in the equations which describe the equilibrium. Instead of approximate solutions based on a variety of simplifying assumptions, solutions well which the accuracy

of the data may be obtained by use of computer.

This study presents a computer program(VLENC) for the estimation of vapor-liquid equilibria by using UNIQUAC and UNIFAC. The results are discussed by giving various examples.

2. THERMODYNAMICS OF EQUILIBRIUM

The thermodynamic treatment of multicomponent phase equilibria is based on the concept of chemical potential. Two or more phases being in thermodynamic equilibrium means that the temperature of each phase is the same and the chemical potential of each component present is equal to its chemical potential in other phases :

$$T^1 = T^2 = \dots \dots \dots T^m \quad (2.1a)$$

$$\mu_i^1 = \mu_i^2 = \dots \dots \dots \mu_i^m \quad (2.1b)$$

where T , μ , and m stand for temperature, chemical potential and the number of phases, respectively. But, for engineering purposes, a physically more meaningful quantity, called fugacity, can be obtained by a simple transformation. Fugacity can be considered as a thermodynamic pressure since the fugacity of each component is equal to its partial pressure in a mixture of ideal gases.

For vapor-liquid equilibria, at the same temperature, the equation of equilibrium for each component i is expressed in terms of fugacity f_i :

$$\hat{f}_i^V = \hat{f}_i^L \quad (2.2)$$

where v and L stand for vapor and liquid phases, respectively.

In order to be able to use Eq.(2.2), the fugacities should be related to the experimentally accessible quantities such as liquid mole fraction x , vapor mole fraction y , absolute temperature T and total pressure P . In thermal and mechanical equilibrium, temperature and pressure are assumed to be same for both phases. Fugacities can be related to these accessible quantities using two auxiliary functions which are called fugacity coefficient ϕ and activity coefficient γ . Fugacity coefficient of a component i in a mixture ($\hat{\phi}_i$) is defined by:

$$\hat{\phi}_i = \frac{\hat{f}_i^V}{Y_i P} \quad (2.3)$$

where superscript v stands for vapor phase. Activity coefficient can be expressed as :

$$\gamma_i = \frac{\hat{f}_i^V}{x_i f_i^{OL}} \quad (2.4)$$

where f_i^{OL} is the standard state fugacity of component i and superscript L stands for liquid phase. Substituting Eqs.(2.3) and (2.4) in Eq. (2.2) yields :

$$\hat{\phi}_i y_i^P = \gamma_i x_i f_i^{\text{OL}} \quad (2.5)$$

This equation is the key equation in the calculation of multicomponent vapor-liquid equilibria.

2.1. Symmetric and Unsymmetric Conventions for Normalization

As indicated in Eq(2.4), the activity coefficient can not be defined unless the standart-state fugacity f_i^{OL} , is clearly specified. It is convenient to think that standart state fugacity f_i^{OL} be the fugacity of component i as a pure liquid at the same temperature of the solution and at some specified pressure. In the choice of standart state fugacity, two different normalizations of activity coefficients for condensable and non-condensable components can be used(1). The normalization of activity coefficient means, specification of the state where in activity coefficient is unity. For condensable compenents, activity coefficient is normalized such that $\gamma_i \rightarrow 1$ as $x_i \rightarrow 1$. In that case, the fugacity of a component becomes equal to the mole fraction multiplied by the standart-state fugacity in the limit. For the system, containing only condensable components, it is said that the activity coefficients follow symmetric convention.

However, if the liquid solution contains a noncondensable component, the normalization of activity coefficients applied

to condensable components can not be used for noncondensable components, since a pure liquid of supercritical component is physically impossible. Nevertheless, the noncondensable components which are not excessively above their critical temperatures can be considered as hypothetical supercritical liquids and their properties can be evaluated by extrapolation. On the other hand, if a noncondensable component is highly above its critical temperature, the concept of hypothetical liquid is of little use since the pure liquid properties obtained by extrapolation in this case lose their physical significance.

Therefore, for a highly supercritical component, it is convenient to use a normalization different from the equation given for condensable components. So, we use $\gamma_i^* \rightarrow 1$ as $x_i \rightarrow 0$. The purpose of this asterisk is to call attention to the difference in normalization. According to this different normalization, the fugacity of component i becomes equal to the mole fraction multiplied by the standard-state fugacity of i in the limit as the mole fraction of component i becomes very small. This type of normalization for a noncondensable component yields in the limit an ideal dilute solution or Henry's law region. In that case, the standard-state fugacity of noncondensable component i is defined by Henry's constant.

$$H_i = \lim_{x_i \rightarrow 0} \frac{f_i^{OL}}{x_i} \quad (2.6)$$

Since in a multicomponent mixture, containing both non-condensable and condensable components, two different normalizations are applied, in this case, normalization is said to be unsymmetric. In such a mixture, the condensable and non-condensable components are referred to as solvents and solutes, respectively. Briefly, it can be said that, the standart state fugacity of a solvent is the fugacity of a pure liquid and the standart state fugacity of a solute is Henry's constant.

2.2. Standart-State Fugacity for Condensable and Noncondensable Components

The prediction and correlation of physical properties of real materials is greatly facilitated when one has a standart base or a model of "ideal" behaviour to which real behaviour can be compared. For example, a model of ideal behaviour is provided by ideal solutions. In an ideal solution, the fugacity of a component is equal to the mole fraction multiplied with standart state fugacity (2) :

$$f_i^{id} = x_i f_i^{OL} \quad (2.7)$$

Ideal solution is observed in the limiting condition $\gamma_i \rightarrow 1$ as $x_i \rightarrow 1$ for condensable component or $\gamma_i^* \rightarrow 1$ as $x_i \rightarrow 0$ for a noncondensable component. For the latter case, the standart state fugacity is the Henry's constant.

For a condensable component, the standard state fugacity is given by (3) :

$$f_i^{\text{OL}} = P_i^{\text{S}} \phi_i^{\text{S}} \exp \int_{P_i^{\text{S}}}^P \frac{v_i^{\text{L}}}{RT} dP \quad (2.8)$$

where f_i^{OL} = standard-state fugacity at system temperature and pressure P ,

P_i^{S} = saturation vapor pressure of pure liquid at temperature T ,

ϕ_i^{S} = fugacity coefficient of pure saturated vapor, and temperature T ,

v_i^{L} = molar liquid volume of pure i at temperature T .

It is assumed that v_i^{L} is a function of only temperature, not of pressure.

Normally, Henry's constant for solute 2 in solvent 1 is determined experimentally at the solvent vapor pressure P_1^{S} . The effect of pressure on Henry's constant is expressed as:

$$H_{2,1}^{(P^r)} = H_{2,1}^{(P_1^S)} \exp \int_{P_1^S}^{P^r} \frac{V_2^\infty}{RT} dP \quad (2.9)$$

where ∞ denotes infinite dilution and P^r any reference pressure. When P^r is low, the exponential correction in Eq(2.9) is negligible.

Since the knowledge of γ_i^* is limited, this study has been concentrated on the mixtures containing dilute solutions of noncondensable components. Therefore, it is convenient to take $\gamma_i^* = 1$ in this study(1). So, for a noncondensable component in dilute region ($X_i \ll 1$), Eq(2.5) can be re written as:

$$y_i P \hat{\phi}_i = X_i H_{i,j} \quad (2.10)$$

Substituting Eq(2.8) into Eq.(2.5), the general equation of vapor-liquid equilibrium for condensable components is written as :

$$y_i P \hat{\phi}_i = X_i \gamma_i P_i^S \phi_i^S \exp \int_{P_1^S}^{P^r} \frac{V_i^L}{RT} dp \quad (2.11)$$

2.3 The Vapor Phase Nonideality : Fugacity Coefficient

The vapor-liquid equilibria conditions can be predicted, if the fugacities of two phases are separately calculated.

In the calculation of the fugacities, different techniques are required for vapor and liquid phases.

Vapor phase nonideality becomes important at moderate and high pressure. At low pressures, the gas molecules interact with one another less strongly. Therefore, as total pressure approaches zero, the nonideality of vapor-liquid system mostly exists in the liquid phase. In that case, vapor phase nonideality can be neglected and the fugacity of the vapor phase becomes the product of the vapor mole fraction and total pressure. This is the ideal gas assumption. The less simplified assumption is the Lewis fugacity rule in which the gases are considered as real, but gas solution as ideal(1). For such conditions, the fugacity of component i in a gas solution is the fugacity of pure component i multiplied by its mole fraction. This simplifies calculations because the fugacity coefficient is no longer a function of vapor mole fraction. So, in the prediction of bubble point and flash conditions, no iterations are required for the vapor mole fractions.

Unfortunately, assumption of ideal gas or Lewis fugacity rule, can sometimes cause serious errors, especially at moderate and high pressures. But, with the use of electronic computers, there is no need to make such simplifications.

It is often convenient to deal with the ratio of the fugacity to pressure rather than with the fugacity itself and this ratio is called fugacity coefficient ϕ . There are three

such quantities.

$$\text{For a mixture, } \phi = f/P \quad (2.12)$$

$$\text{For a pure material, } \phi_i = f_i/P \quad (2.13)$$

$$\text{For a component in a solution } \hat{\phi}_i = \hat{f}_i/X_i P \quad (2.14)$$

For a mixture or a pure material, fugacity coefficient can be found using the thermodynamic relationship:

$$\ln \phi = \int_0^P (Z-1) \frac{dP}{P} \quad (2.15)$$

where z is the compressibility factor of mixture or pure component. Similar expression is obtained if V , rather than P , is the variable of integration. Then,

$$\ln \phi = (Z-1) - \ln Z - \int_{\infty}^V (Z-1) \frac{dV}{V} \quad (2.16)$$

The fugacity coefficient of a component i in a solution ($\hat{\phi}_i$) can be expressed as the partial molar property of $\ln \phi$, where ϕ is the mixture fugacity coefficient :

$$\ln \hat{\phi}_i = \left(\frac{\partial \ln \phi}{\partial X_i} \right)_{T, P, X_{j \neq i}} \quad (2.17)$$

If the vapor mixture contains only ideal gases, the integral in Eq.(2.15) is zero and Z is unity for all components. In that case ϕ is also unity. In a mixture which contains

gases which are not ideal with the gas solution being ideal. the fugacity coefficient of a component i in a solution becomes equal to the fugacity coefficient of a pure component, and then Eq.(2.17) need not be used for vapor phase nonideality.

2.3.1. Peng-Robinson Equation of State

The fugacity coefficient can easily be found from any equation of state. Numerous empirical or semiempirical equations have been proposed up to now. One of them, virial equation of state is the only equation which has a theoretical base. In this study, a new semiempirical equation of state(4), called Peng-Robinson equation of state, is used. Peng-Robinson equation of state is a modified form of vander Waals equation of state.

Semi-empirical equations of state generally express pressure as the sum of two terms, a repulsive pressure P_R and an attractive pressure P_A as follows :

$$P = P_R + P_A \quad (2.18)$$

The equations of state of vander Waals (1873) and Redlich-Kwong (1949) and Soave (1972) are examples of semiempirical equations and all express the repulsive pressure by the vander Waals hard-sphere equation, similar to Peng-Robinson equation:

$$P_R = \frac{RT}{V-b} \quad (2.19)$$

The attractive pressure can be expressed as :

$$P_A = - \frac{a}{g(V)} \quad (2.20)$$

where $g(V)$ is a function of the molar volume and b is constant related to the size of the hard sphere. The parameter a can be regarded as a measure of the intermolecular attractive forces. b is usually treated as temperature independent and a is a constant only in vander Waals equation.

Choosing a suitable function for $g(V)$, the predicted critical compressibility factor can be made to approach a more realistic value. The applicability of the equation at very high pressure is affected by the magnitude of b/V_c , where V_c is the critical volume. Furthermore, treating the dimensionless scaling factor for the energy parameter, as a function of acentric factor in addition to reduced temperature, has significantly improved the prediction of compressibility factor and consequently, the equilibrium ratios (y/x) in mixtures.

In this study. the attractive pressure is calculated from (4) :

$$P_A = - \frac{a(T)}{V(V+b) + b(V-b)} \quad (2.21)$$

Using Eqs. (2.18), (2.19) and (2.21), one obtains:

$$P = \frac{RT}{V-b} - \frac{a(T)}{V(V+b)+b(V-b)} \quad (2.22)$$

Eq (2.22) can be rewritten as :

$$Z^3 - (1-B)Z^2 + (A-3B^2-2B)Z - (AB-B^2-B^3) = 0 \quad (2.23)$$

where

$$A = \frac{aP}{R^2T^2} \quad (2.24)$$

$$B = \frac{bP}{RT} \quad (2.25)$$

$$Z = \frac{PV}{RT} \quad (2.26)$$

Eq. (2.23) yields one root or three roots depending upon the number of phases in the system. In the two-phase region, the largest root is the compressibility factor of the vapor while the smallest positive root corresponds to that of the liquid.

Using Eq.(2.22), expressions for a and b can be obtained at the critical point :

$$a(T_c) = 0.45724 \frac{R^2 T_c^2}{P_c} \quad (2.27)$$

$$b(T_c) = 0.07780 \frac{RT_c}{P_c} \quad (2.28)$$

$$Z_c = 0.307 \quad (2.29)$$

At temperatures other than critical :

$$a(T) = (T_c) \cdot \alpha (T_r, \omega) \quad (2.30)$$

$$b(T) = b(T_c) \quad (2.31)$$

where $\alpha(T_r, \omega)$ is a dimensionless function of reduced temperature, T_r , (also called scaling factor for energy) and acentric factor ω , and equals unity at the critical temperature. The functional form of α was determined by using the literature vapor pressure values. For all substances examined, the relationship between α and T_r can be linearized by the following equation :

$$\alpha^{1/2} = 1 + \kappa (1 - T_r)^{1/2} \quad (2.32)$$

where κ is a constant characteristic of each substance. κ values have been correlated against the acentric factor. The resulting equation is :

$$\kappa = 0.37464 + 1.5423 \omega - 0.26992 \omega^2 \quad (2.33)$$

Substituting Eq- (2.22) into Eq.(2.15), an expression for pure component fugacity coefficient is obtained :

$$\ln \phi_i = Z - 1 - \ln(Z - B) - \frac{A}{2 \sqrt{2} B} \ln \left(\frac{Z + 2.414B}{Z - 0.414B} \right)$$

The fugacity coefficient of component i in a solution can be found by combining Eqs. (2.15), (2.17) and (2.22) :

$$\ln \hat{\phi}_i = \frac{b_i}{b} (Z - 1) - \ln(Z - B) - \frac{A}{2 \sqrt{2} B} \cdot \left(\frac{\sum_k x_k a_k}{a} - \frac{b_i}{b} \right) \ln \left(\frac{Z + 2.414B}{Z - 0.414B} \right) \quad (2.35)$$

The mixtures parameters used in Eq.(2.35) are defined by the following mixture rules :

$$a = \sum_i \sum_j X_i X_j a_{ij} \quad (2.36)$$

$$b = \sum_i X_i b_i \quad (2.37)$$

$$a_{ij} = (1 - \delta_{ij}) a_i^{1/2} a_j^{1/2} \quad (2.38)$$

In Eq(2.38) δ_{ij} is an empirically determined binary interaction coefficient, characterizing the i-j binary system. δ_{ij} s are determined using experimental binary VLE data. Its inclusion is necessary in order to bring about better agreement between experimental data and predictions for binary systems involving a hydrocarbon and nonhydrocarbon component. The interaction parameters for several of the water-hydrocarbon binaries are listed in Appendix C, but no interaction parameters is available for hydrocarbon-hydrocarbon binaries (5).

2.4 Liquid Phase Nonideality : Activity Coefficient

In order to predict vapor-liquid equilibria in multicomponent mixtures, we require a method for calculating the fugacity of component i in a liquid phase. First of all, nonideality of the liquid phase has to be expressed. Activity coefficient is used for this purpose. In a mixture, activity coefficient γ_i of component i is related to G^E , the Excess Gibbs free energy per mole of mixture by :

$$G^E = RT \sum_i X_i \ln \gamma_i \quad (2.39)$$

$$\left(\frac{\partial n_T G^E}{\partial n_i} \right)_{T,P,n_{j \neq i}} = RT \ln \gamma_i \quad (2.40)$$

where R is the gas constant, T is the absolute system temperature, n_i is the number of moles of component i , n_T is the total number of moles ($n_T = \sum_i n_i$) and $X_i = n_i/n_T$.

Activity coefficient depends on composition, temperature and pressure. The effect of pressure on activity coefficient is given by :

$$\bar{v}_i^L - v_i^L = RT \left(\frac{\partial \ln \gamma_i}{\partial P} \right)_{T, X_i} \quad (2.41)$$

where \bar{v}_i^L is partial molar liquid volumes and v_i^L is molar liquid volume. At low or moderate pressures, the effect of pressure is negligible, and in this study, pressure effect on activity coefficient is neglected .

The most important variable is the composition of the component of interest. The effect of temperature is not negligible, but often it is not large when consideration is restricted to a moderate temperature range.

As it is seen in Eq.(2.40), in order to obtain activity coefficients, it is necessary to construct an expression which

gives G^E as a function of composition, temperature and pressure. In this study, two different models are used in the calculation of liquid activity coefficients. These models will be discussed in the following sections :

2.4.1 UNIQUAC Equation

A correlation based on the quasi-chemical theory of liquid solutions proposed by Guggenheim(6), and generalized by Abrams and Prausnitz(7), is the UNIQUAC (Universal Quasi Chemical Theory) equation. Unlike Guggenheim's theory, however, UNIQUAC is applicable to mixtures whose molecules differ appreciably in size and shape. One advantage of UNIQUAC is that it contains no more than two adjustable parameters per binary.

UNIQUAC equation, is constructed from a G^E expression which consists of two parts.

$$G^E = G^E \text{ (combinatorial)} + G^E \text{ (residual)} \quad (2.42)$$

for a binary system :

$$\frac{G^E \text{ (combinatorial)}}{RT} = X_1 \ln \frac{\phi_1}{X_1} + X_2 \ln \frac{\phi_2}{X_2} + \left(\frac{Z}{2} \right) (q_1 X_1 \ln \frac{\theta_1}{\phi_1} + q_2 X_2 \ln \frac{\theta_2}{\phi_2})$$

$$(2.43)$$

$$\frac{G^E(\text{residual})}{RT} = -q_1' X_1 \ln(\theta_1' + \theta_2' \tau_{21}) - q_2' X_2 \ln(\theta_2' + \theta_1' \tau_{12}) \quad (2.44)$$

where ϕ is segment fraction, θ and θ' are area fractions, Z is the coordination number. Z may have a value between 4 and 12 depending on the type of packing. Empirically, for a typical liquid at ordinary conditions, Z is close 10. Numerical results for $\ln \gamma_i$ are insensitive to the choice of Z provided a reasonable value ($6 < Z < 12$) is chosen. However, adjustable parameters τ_{ij} and τ_{ji} depend on that choice. In the present work, Z is taken as 10 (8).

Segment fraction ϕ and area fractions θ and θ' are given for a binary system by :

$$\phi_1 = \frac{X_1 r_1}{X_1 r_1 + X_2 r_2} \quad \phi_2 = \frac{X_2 r_2}{X_1 r_1 + X_2 r_2} \quad (2.45)$$

$$\theta_1 = \frac{X_1 q_1}{X_1 q_1 + X_2 q_2} \quad \theta_2 = \frac{X_2 q_2}{X_1 q_1 + X_2 q_2} \quad (2.46)$$

$$\theta_1' = \frac{X_1 q_1'}{X_1 q_1' + X_2 q_2'} \quad \theta_2' = \frac{X_2 q_2'}{X_1 q_1' + X_2 q_2'} \quad (2.47)$$

The parameters r , q and q' are pure component molecular structure constants depending on molecular size and external surface areas. r and q are expressed as:

$$r_i = V_{wi} / 15.17 \quad (2.48)$$

$$q_i = A_{wi} / (2.5 / 10^9) \quad (2.49)$$

where V_{wi} and A_{wi} are the vander Waals volumes and areas of the molecules given by Bondi(9).

In the original formulation $q=q'$ (7). To obtain better agreement with water or alcohols, q' is used for water and alcohols and they are obtained empirically to give an optimum fit to a variety of systems containing these components(10). For alcohols, the surface, of interaction q' , is smaller than the geometric external q , indicating that for alcohols, intermolecular attraction is determined primarily by the-OH groups.

For each binary combination in a multicomponent mixture, there are two adjustable parameters, τ_{12} and τ_{21} . These in turn are given in terms of characteristic energies Δu_{12} and Δu_{21} by :

$$\tau_{12} = \exp\left(-\frac{\Delta U_{12}}{RT}\right) = \exp\left(-\frac{a_{12}}{T}\right) \quad (2.50)$$

$$\tau_{21} = \exp\left(-\frac{\Delta U_{21}}{RT}\right) = \exp\left(-\frac{a_{21}}{T}\right) \quad (2.51)$$

Eqs.(2.50) and (2.51) give the primary effect of temperature on τ_{12} and τ_{21} . Characteristic energies ΔU_{12} and ΔU_{21} are often weakly dependent on temperature. Thus, the activity coefficients are readily found by differentiation as indicated by Eq(2.40).

For a binary mixture, activity coefficient γ_1 , is given by :

$$\ln \gamma_1 = \ln \frac{\phi_1}{x_1} + \left(\frac{z}{2}\right) q_1 \ln \frac{\theta_1}{\phi_1} + \phi_2 \left(l_1 - \frac{r_1}{r_2} l_2 \right) - q_1' \ln (\theta_1' + \theta_2' \tau_{21}) + \theta_2' q_1' \left(\frac{\tau_{21}}{\theta_2' + \theta_2' \tau_{21}} - \frac{\tau_{12}}{\theta_2' + \theta_1' \tau_{12}} \right) \quad (2.52)$$

$$\text{where } l_1 = \left(\frac{z}{2}\right) (r_1 - q_1) - (r_1 - 1) \quad (2.53)$$

$$\text{and } l_2 = \left(\frac{z}{2}\right) (r_2 - q_2) - (r_2 - 1) \quad (2.54)$$

For component 2, γ_2 can be found by interchanging subscripts 1 and 2.

Eqs. (2.43) and (2.44) can be extended to multicomponent mixtures without additional assumptions as follows :

$$\frac{G^E(\text{combinatorial})}{RT} = \sum_i x_i \ln \frac{\phi_i}{x_i} + \frac{z}{2} \sum_i q_i x_i \ln \frac{\theta_i}{\phi_i} \quad (2.55)$$

$$\frac{G^E(\text{residual})}{RT} = - \sum_i q_i' x_i \ln (\sum_j \theta_j' \tau_{ji}) \quad (2.56)$$

where segment fraction ϕ and area fractions θ and θ' are given by :

$$\phi_i = \frac{r_i x_i}{\sum_j r_j x_j} \quad (2.57)$$

$$\theta_i = \frac{q_i X_i}{\sum_j r_j X_j} \quad (2.58)$$

$$\theta_2' = \frac{q_i' X_i}{\sum_j q_j' X_j} \quad (2.59)$$

For any component i , the activity coefficient can be found by using Eq.(2.40) :

$$\begin{aligned} \ln \gamma_i = & \ln \frac{\phi_i}{X_i} + \left(\frac{Z}{2}\right) q_i \ln \frac{\theta_i}{\phi_i} + l_i - \frac{\phi_i}{X_i} \sum_j X_j l_j - q_i' \ln (\sum_j \theta_j' \tau_{ji}) \\ & + q_i' - q_i \sum_j \frac{\theta_j' \tau_{ij}}{\sum_k \theta_k' \tau_{kj}} \end{aligned} \quad (2.60)$$

$$\text{where } l_j = \frac{Z}{2} (r_j - q_j) - (r_j - 1) \quad (2.61)$$

Eq.(2.60) requires only pure component and binary parameters.

In this work, the fugacity of the liquid phase for noncondensable component in dilute region is taken as the mole fraction of that component multiplied by Henry's constant:

$$f_i^L = X_i H_{ij} \quad (2.62)$$

where $H_{i,j}$ shows Henry's constant for solute i in solvent j .

To estimate Henry's constant for solute i in a mixed solvent, the following approximation is used (1):

$$\ln H_{i,M} = \sum_j \theta_j \ln H_{ij} \quad (2.63)$$

where the summation is over all solvents j , and M shows the mixture. The surface fraction θ_j is taken on a solute free basis where solute free refers to all solutes. For convenience, H_{ij} , is expressed as a product of two functions(1):

$$H_{i,j} = (\gamma_{i,j}^{\infty}) f_i^{OL} \quad (2.64)$$

where supercript ∞ denotes infinite dilution.

For noncondensable components, the hypothetical standart state fugacity is represented by an arbitrary function(1).

$$\ln \frac{f_i^{OL}}{P_{ci}} = 7.224 - 7.534 \left(\frac{T}{T_{ci}} \right)^{-1} - 2.598 \ln \left(\frac{T}{T_{ci}} \right) \quad (2.65)$$

where P_{ci} and T_{ci} are, respectively, critical pressure and critical temperature of component i . Eq(2.65) gives a rough first approximation for the effect of temperature on Henry's constant. Activity coefficient $\gamma_{i,j}^{\infty}$ is often only weak function of temperature provided that the temperature range is large and provided the system temperature T is not near T_{cj} , the critical temperature of solvent j . Here, $\gamma_{i,j}^{\infty}$ is given by the empirical equation :

$$\ln \gamma_{i,j}^{\infty} = \delta_{i,j}^{(0)} + \delta_{i,j}^{(1)} T^{-1} \quad (2.66)$$

where $\delta_{i,j}^{(0)}$ and $\delta_{i,j}^{(1)}$ are binary parameters. For a mixed solvent:

$$\ln \gamma_i^\infty = \sum_j \theta_j \ln \gamma_{i,j}^\infty \quad (2.67)$$

where θ_j , again on solute free basis, is the surface fraction of solvent j .

When a condensable solute is present, the activity coefficient of a solvent is given by Eq(2.60) provided that all composition variables (X, θ, ϕ) are taken on solute free basis. For solutes with small mole fractions, UNIQUAC parameters τ_{ij} and τ_{ji} are set to unity, wherever i is a solute and j is either a solvent or a solute.

UNIQUAC is applicable to nonelectrolyte multicomponent mixtures of nonpolar and polar liquids containing small or large molecules, including polymers, because the primary concentration variable is a surface fraction rather than mole fraction.

2.4.2 UNIFAC Equation

Another model for the prediction of activity coefficients, UNIFAC (UNIQUAC Functional Group Activity Coefficients) (11) is an example of a group contribution method. It is based on the UNIQUAC method. The basic difference is that the liquid mixture is considered to be a solution of structural group is like $-\text{CH}_3$, $-\text{OH}$ and others which when added, form the parent \dagger only volatile gases like $\text{H}_2, \text{N}_2, \text{O}_2, \text{CO}, \text{Ar}$ and CH_4 are considered to be noncondensable.

molecule. The properties of mixture is then calculated from the properties of the molecules.

Extension of the group-contribution idea to mixtures is extremely attractive because, while the number of pure fluids in chemical technology is already very large, the number of different mixtures is still larger, by many orders of magnitude. Thousands, perhaps millions, of multicomponent liquid mixtures of interest in the chemical industry can be constituted from perhaps at most one hundred functional groups.

In the UNIFAC method, G^E expression and thus activity coefficient has a combinatorial part and a residual part as in UNIQUAC.

$$\ln \gamma_i^C = \ln \gamma_i^C + \ln \gamma_i^R \quad (2.68)$$

The combinatorial part of the UNIQUAC equation is used directly:

$$\ln \gamma_i^C = \ln \frac{\phi_i}{X_i} + \frac{z}{2} q_i \ln \frac{\theta_i}{\phi_i} + l_i - \frac{\phi_i}{X_i} \sum_j X_j l_j \quad (2.69)$$

ϕ_i , θ_i and l_i are given by Eqs. (2-57), (2-58) and (2-61), respectively z is taken as 10. Only pure component parameters enter into this equation. Parameters r_i and q_i are calculated as the sum of the group volume and area parameters R_k and Q_k :

$$r_i = \sum_k v_k^{(i)} R_k \quad \text{and} \quad q_i = \sum_k v_k^{(i)} Q_k \quad (2.70)$$

where $v_k^{(i)}$ is always an integer, showing the number of groups of type k in molecule i .

Group parameters R_K and Q_K are obtained from the vander Waals group volume and surface areas V_{wk} and A_{wk} , given by Bond (9), as in UNIQUAC equation :

$$R_K = V_{wk}/15.17 \quad (2.71)$$

$$Q_K = A_{wk}/(2.5 \times 10^9) \quad (2.72)$$

The normalization factors 15.17 and 2.5×10^9 are those given by Abrams and Prausnitz (7).

The residual part of the activity coefficient for the UNIFAC equation is expressed as :

$$\ln \gamma_i^R = \sum_k v_k^{(i)} \left| \ln \gamma \Gamma_k - \ln \Gamma_k^{(i)} \right| \quad (2.73)$$

where Γ_k is the group residual activity coefficient, and $\Gamma_k^{(i)}$ is the residual activity coefficient of group k in a reference solution containing only molecules of type i . In Eq(2.73), the term $\ln \Gamma_k^{(i)}$ is necessary to attain the normalization that activity coefficient γ_i becomes unity as $X_i \rightarrow 1$. The group activity coefficient for group k in molecule i ($\Gamma_k^{(i)}$) depends on the molecule i in which k is situated. The group activity coefficient Γ_k is found from the expression :

$$\ln \Gamma_k = Q_k \left[1 - \ln \left(\frac{\sum_m \theta_m \Psi_{mk}}{\sum_n \theta_n \Psi_{nm}} \right) \right] \quad (2.74)$$

Eq. (2.74) also holds for $\ln \Gamma_k^{(i)}$. In Eq. (2.74), θ_m is the area fraction of group m , and the sum is over all different groups.

θ_m is calculated in a manner similar to that for θ_j :

$$\theta_m = \frac{Q_m X_m}{\sum_n Q_n X_n} \quad (2.75)$$

where X_m is the mole fraction of group m in the mixture. The group interaction parameter Ψ_{mn} is given by:

$$\Psi_{mn} = \exp \left[- \frac{U_{mn} - U_{nn}}{RT} \right] = \exp \left(- \frac{a_{mn}}{T} \right) \quad (2.76)$$

where U_{mn} is a measure of the energy of interaction between groups m and n . A sample calculation of activity coefficients with UNIFAC is given in Appendix B.

UNIFAC originally had 18 main groups and 26 subgroups (11). Later, the method was revised and its range of applicability considerably extended. (12), (13), (14). UNIFAC now encompasses 40 main groups and 76 subgroups. Although they have their own Rand Q parameters it is assumed that the subgroups within the same main group have identical group energy interaction parameters.

The limitations of UNIFAC are that it is not applied at high pressures and to systems containing noncondensable, eletrolytic and polymeric components and immiscible liquids(21).

3. COMPUTATIONAL METHODS

The thermodynamic basis for calculation of phase equilibrium conditions in PVT systems asserts that the fugacity \hat{f}_i of each component i in an N -component system must be the same in all phases at equilibrium.

$$\hat{f}_i^1 = \hat{f}_i^2 = \dots \dots \dots \hat{f}_i^m \quad (3.1)$$

According to the phase rule, the number of degrees of freedom F at equilibrium is given by the difference between the number of variables and the number of equations. The variables are temperature, pressure and N mole fractions in each of the m equilibrium phases. The total number of equations are $(m-1)N+m$. $(m-1)N$ of these are given by Eq.(3.1) and the rest m equation are obtained from the stoichometric relations in each phase.

$$\sum_{i=1}^N W_i = 1 \quad (3.2)$$

where W_i is the mole fraction of component i in each phase. So, the degrees of freedom F in an N -component and inphase system at equilibrium, where total number of variables is $Nm+2$, can be expressed as :

$$F = 2 + N - m \quad (3.3)$$

Application of Eq(3.3) to a vapor liquid equilibrium system gives $F = N$, this means that for an equilibrium state only N of the $2N+2$ variables are independent. Once, N phase rule variables are specified, remaining $N+2$ variables can be determined, in principle, by simultaneous solution of the N equilibrium relations of the form:

$$\hat{f}_i^V = \hat{f}_i^L \quad (2.2)$$

and 2 equations given by Eq.(3.2) for each phase.

Because of the engineering interest, vapor-liquid equilibrium calculations are performed by specifying either temperature or pressure, and either the liquid phase or vapor phase mole fractions. Therefore, there are four possible types of vapor-liquid equilibrium calculations as given in Table 3.1.

TABLE 3.1 The Types of VLE Calculations

<u>Given</u>	<u>Find</u>	<u>Type</u>
P, X_1, X_2, \dots, X_N	T, Y_1, Y_2, \dots, Y_N	Bubble T
T, X_1, X_2, \dots, X_N	P, Y_1, Y_2, \dots, Y_N	Bubble P
P, Y_1, Y_2, \dots, Y_N	T, X_1, X_2, \dots, X_N	Dew T
T, Y_1, Y_2, \dots, Y_N	P, X_1, X_2, \dots, X_N	Dew P

The equations available to perform vapor-liquid equilibrium calculations are nonlinear and to obtain a solution one must use an effective iterative procedure. For bubble and dew point calculations, two objective functions are introduced, respectively :

$$\sum_i^N k_i W_i = 1 \quad (3.4)$$

and

$$\sum_i^N W_i / k_i = 1 \quad (3.5)$$

with a single unknown variable either the temperature (at given pressure) or the pressure (at given temperature) (1) Here, K_i is the equilibrium ratio which is given by :

$$K_i = y_i / X_i \quad (3.6)$$

and it can be calculated using either Eq(2.10) or Eq.(2.11)

The equations like Eq.(3.4) and (3.5) are mostly solved by an effective iteration method like Newton-Raphson method. The iteration formula of Newton-Raphson method, being essentially a point-slope method, is given by :

$$X_{\text{new}} = X_{\text{old}} - \frac{F(X_{\text{old}})}{F'(X_{\text{old}})} \quad (3.7)$$

where X is an independent variable.

Using Raoult's law for vapor-liquid equilibrium and using Antoine equation for saturated vapor pressure, it is

helpful to note that K_i tends to vary with $1/P$ and with $\exp(1/T)$. For bubble point temperature calculations, an objective function is redefined:

$$G(T) = \ln \left| \sum_{i=1}^N K_i W_i \right| = 0 \quad (3.8)$$

Similarly, for dew point temperature calculations,

$$G(1/T) = \ln \left| \sum_{i=1}^N W_i / K_i \right| = 0 \quad (3.9)$$

is defined. Eqs.(3.8) and (3.9) have more nearly linear behaviour than do Eqs.(3.4) and (3.5)

For bubble point and dew-point pressure calculations, the appropriate forms are, respectively :

$$G(1/P) = \sum_{i=1}^N K_i W_i^{-1} = 0 \quad (3.10)$$

and

$$G(P) = \sum_{i=1}^N W_i / K_i^{-1} = 0 \quad (3.11)$$

At low or moderate pressure, a Newton-Raphson iteration is not required for bubble and dew pressure calculations, and for such cases, iterations are made by using the following equations, respectively :

$$P_{\text{new}} = P_{\text{old}} \sum_{i=1}^N K_i W_i \quad (3.12)$$

$$P_{\text{new}} = P_{\text{old}} / \left(\sum_{i=1}^N W_i / K_i \right) \quad (3.13)$$

The solution of the equations in vapor-liquid equilibrium calculations, requires tedious trial and error calculations which can be effectively and easily carried out by a digital computer. The interactive computer program VLENC written in Fortran V, in this study, has mainly four options for vapor-liquid equilibrium calculations: DewT, Bubble T, Dew P and Bubble P as given in Table 3.1, for the multicomponent systems containing condensable and noncondensable components. VLENC calculates vapor-phase nonidealities using Peng-Robinson equation, but it has two options for liquid phase nonideality, namely UNIQUAC and UNIFAC. VLENC consists of a main program and 17 subroutines. The relations between main program and its subroutines are given in Figure 1. VLENC also contains 4 data files : YLIST is used for the names of the components for which thermophysical properties exists, YDATAPP is used for the physical properties of those components, YDATAUQ and YDATUM are used, respectively for the parameters of UNIQUAC and the functional group parameters of UNIFAC equations. The list of the UNIFAC and UNIQUAC parameters are given in Appendix C.

The flow diagrams of the subroutines DEW T, DEW P, BUB. T, BUB. P are given in figures (3.2), (3.3), (3.4). The flow diagrams for the Dew T and Bubble T calculations are given on the same figure, because the same procedure is used for both calculations. DEWT is one of the main subroutines of VLENC for the calculation of dew-point temperature of a multicomponent mixture. In the prediction of dew point temperature, the program tries to equate the objective function, G given by Eq(3.9), to zero.

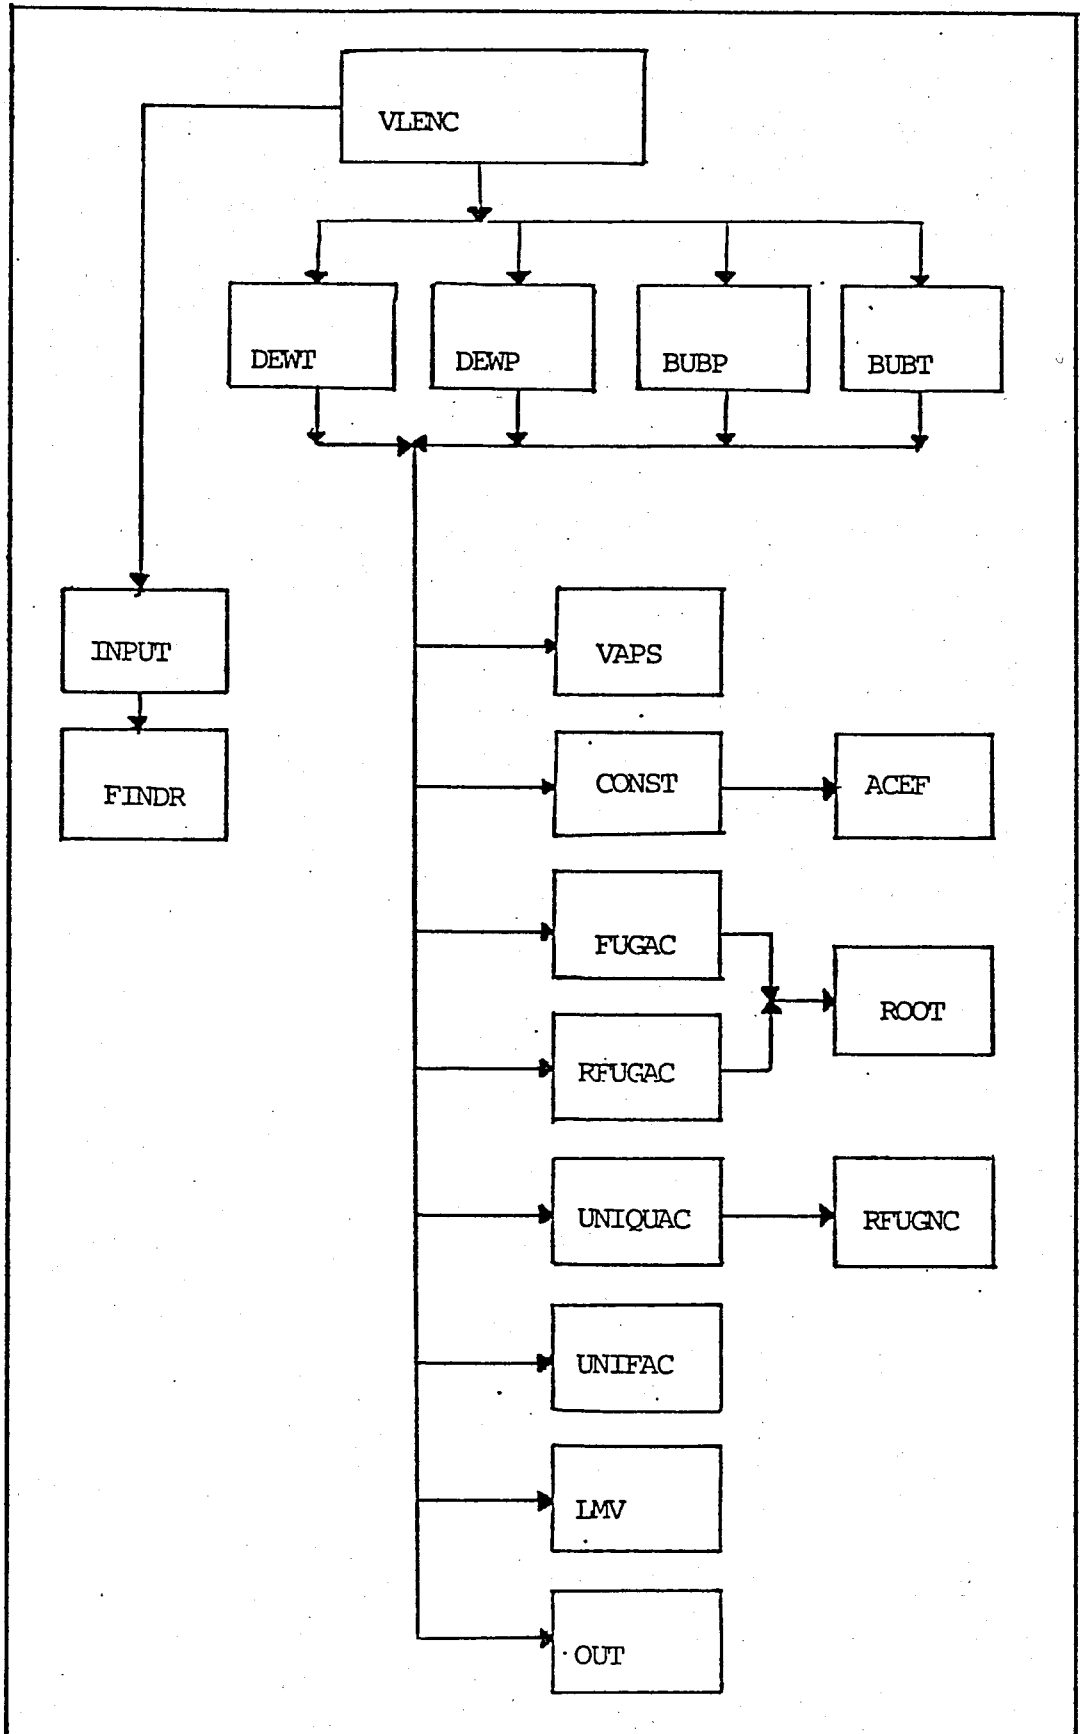


FIGURE 3.1 Program VLENC and its Subroutines

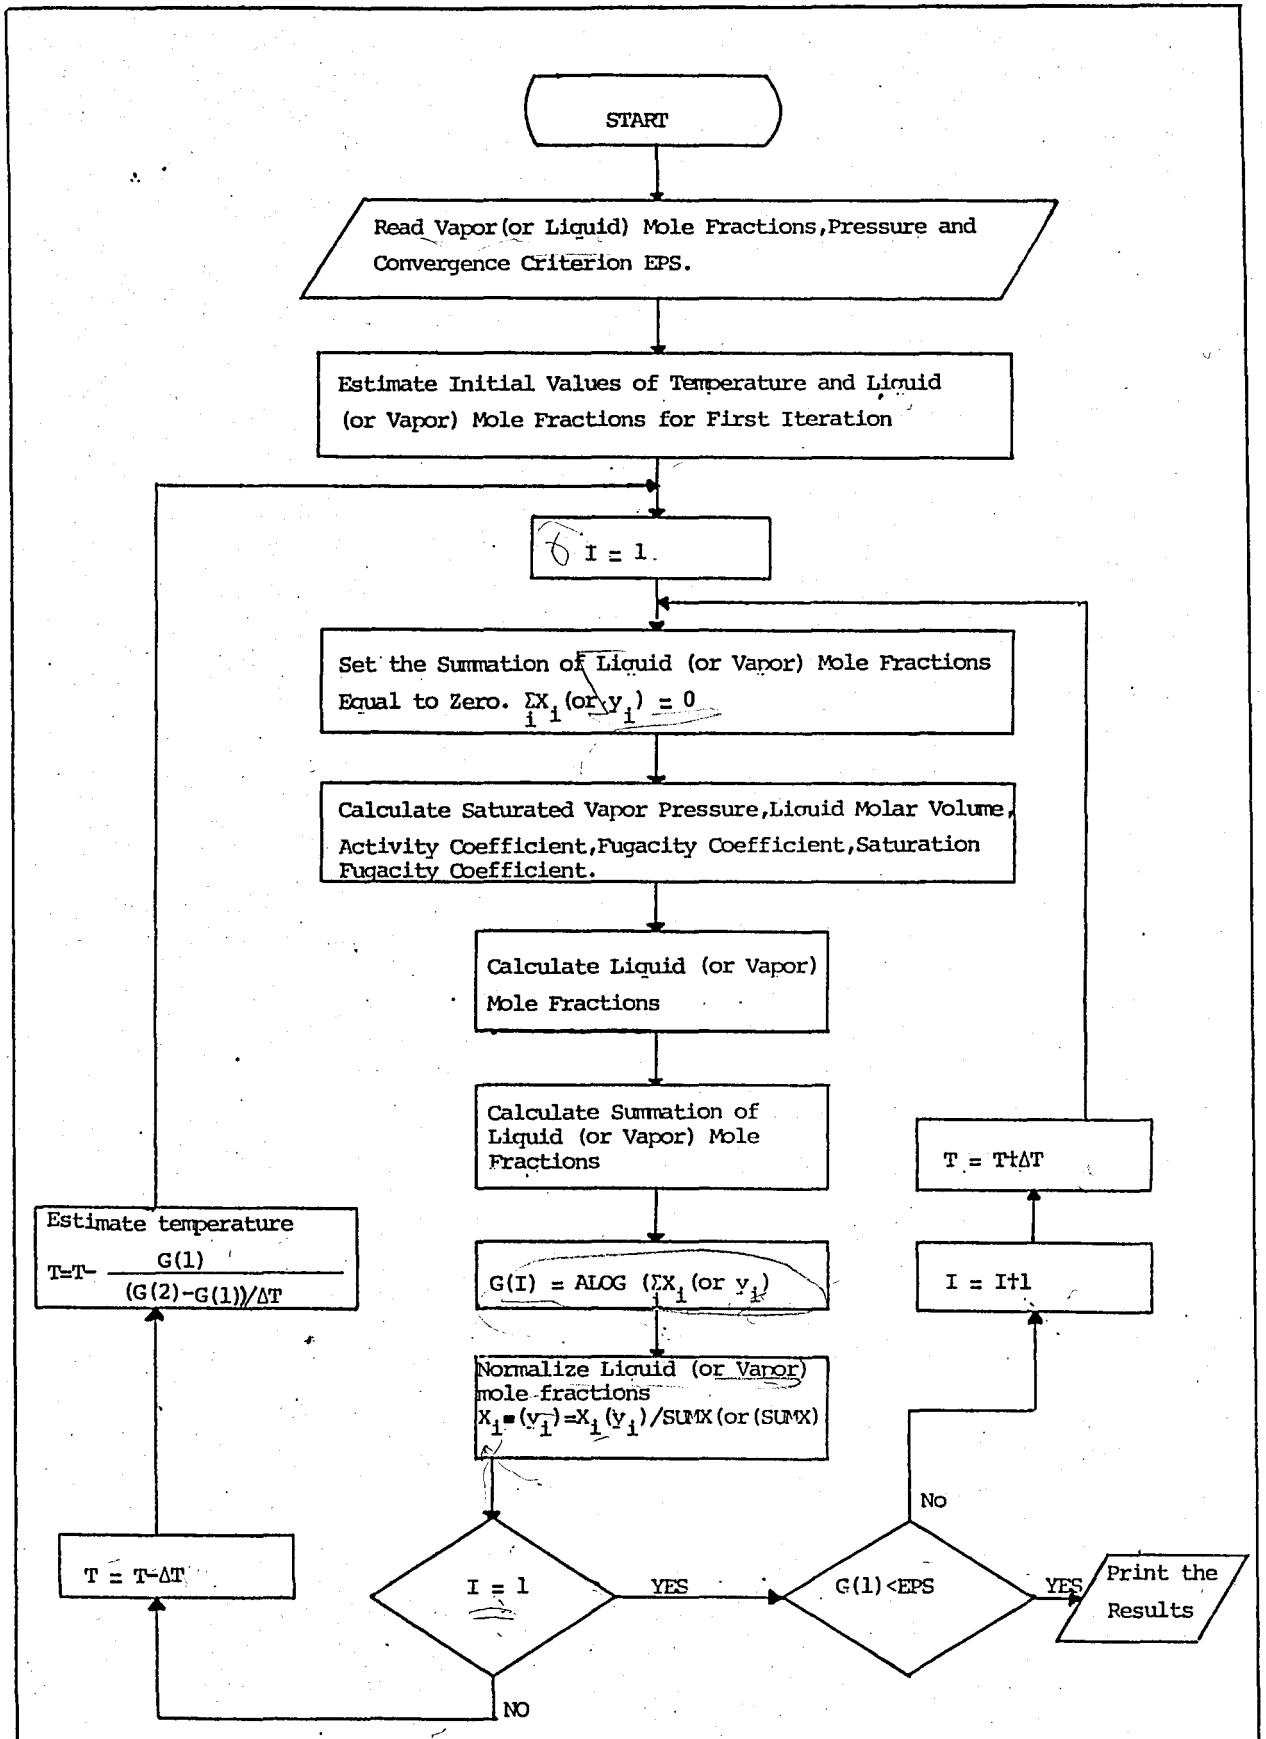


FIGURE 3.2. Flow Diagram for DewT (program DEWT) and BubbleT (Program BUBT) Calculations

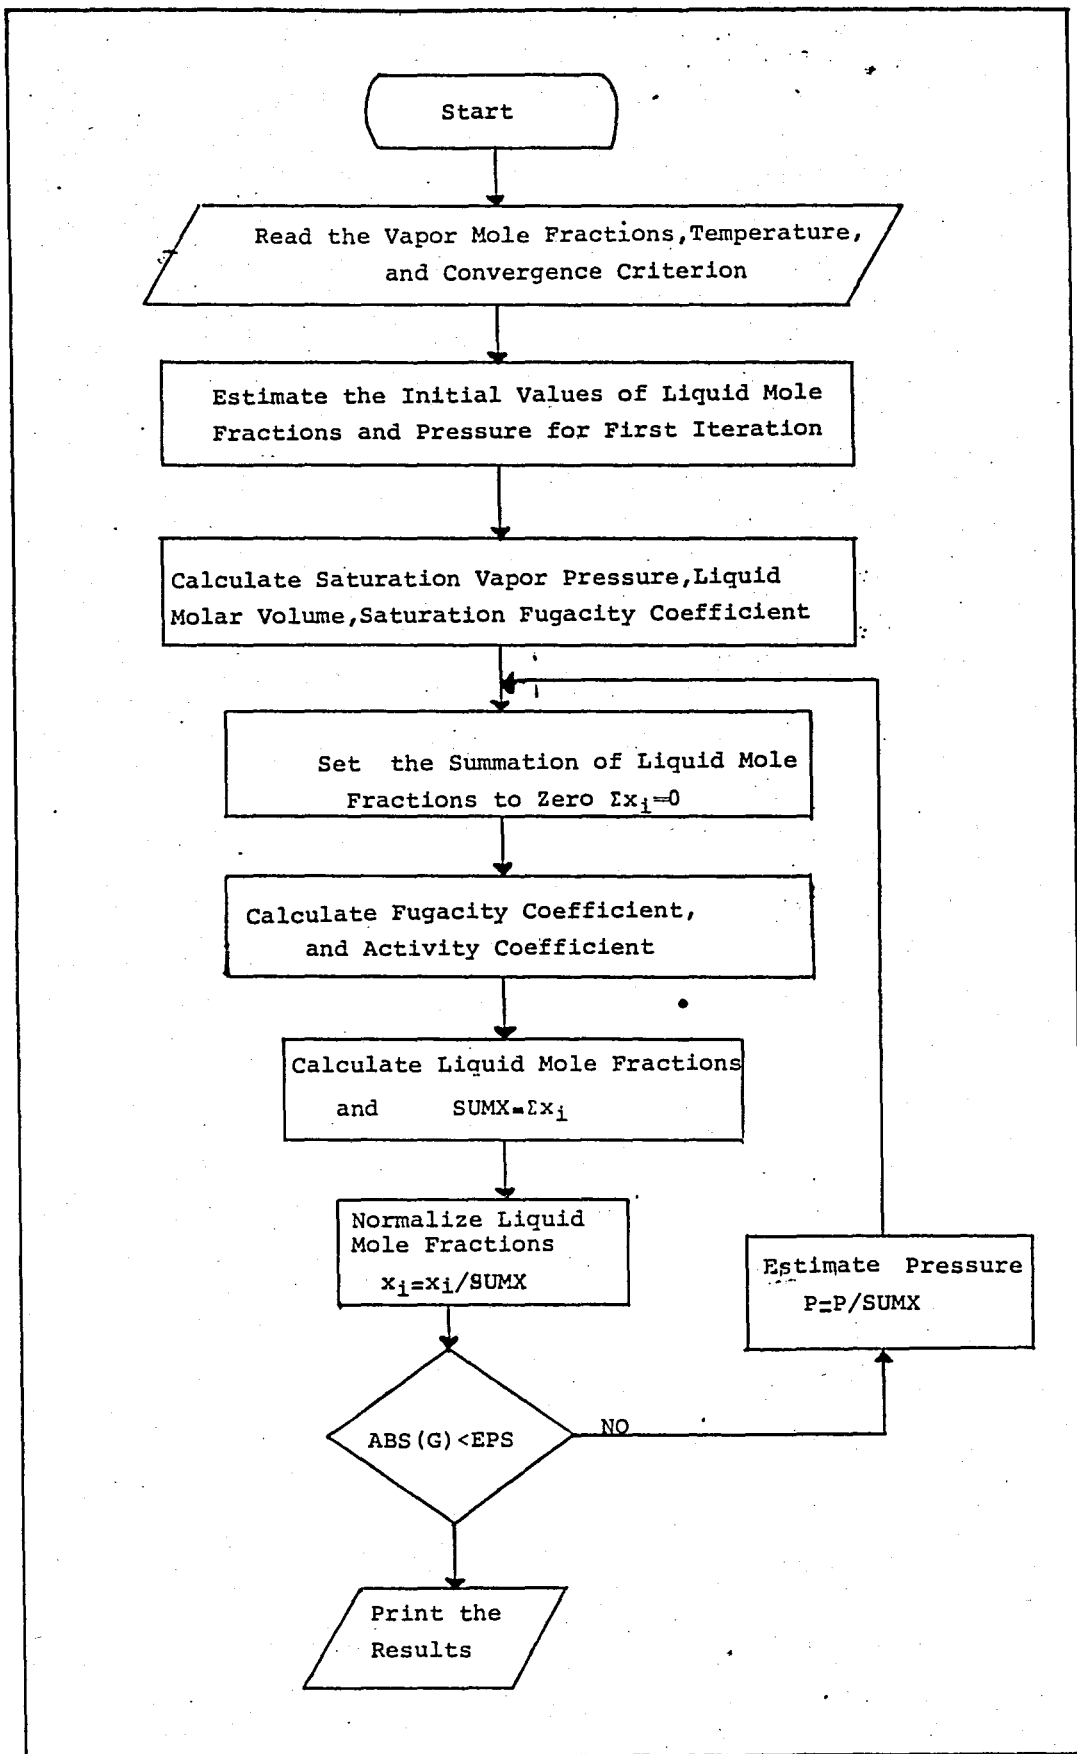


FIGURE 3.3. Flow Diagram for Dew P Calculations (Program DEWP)

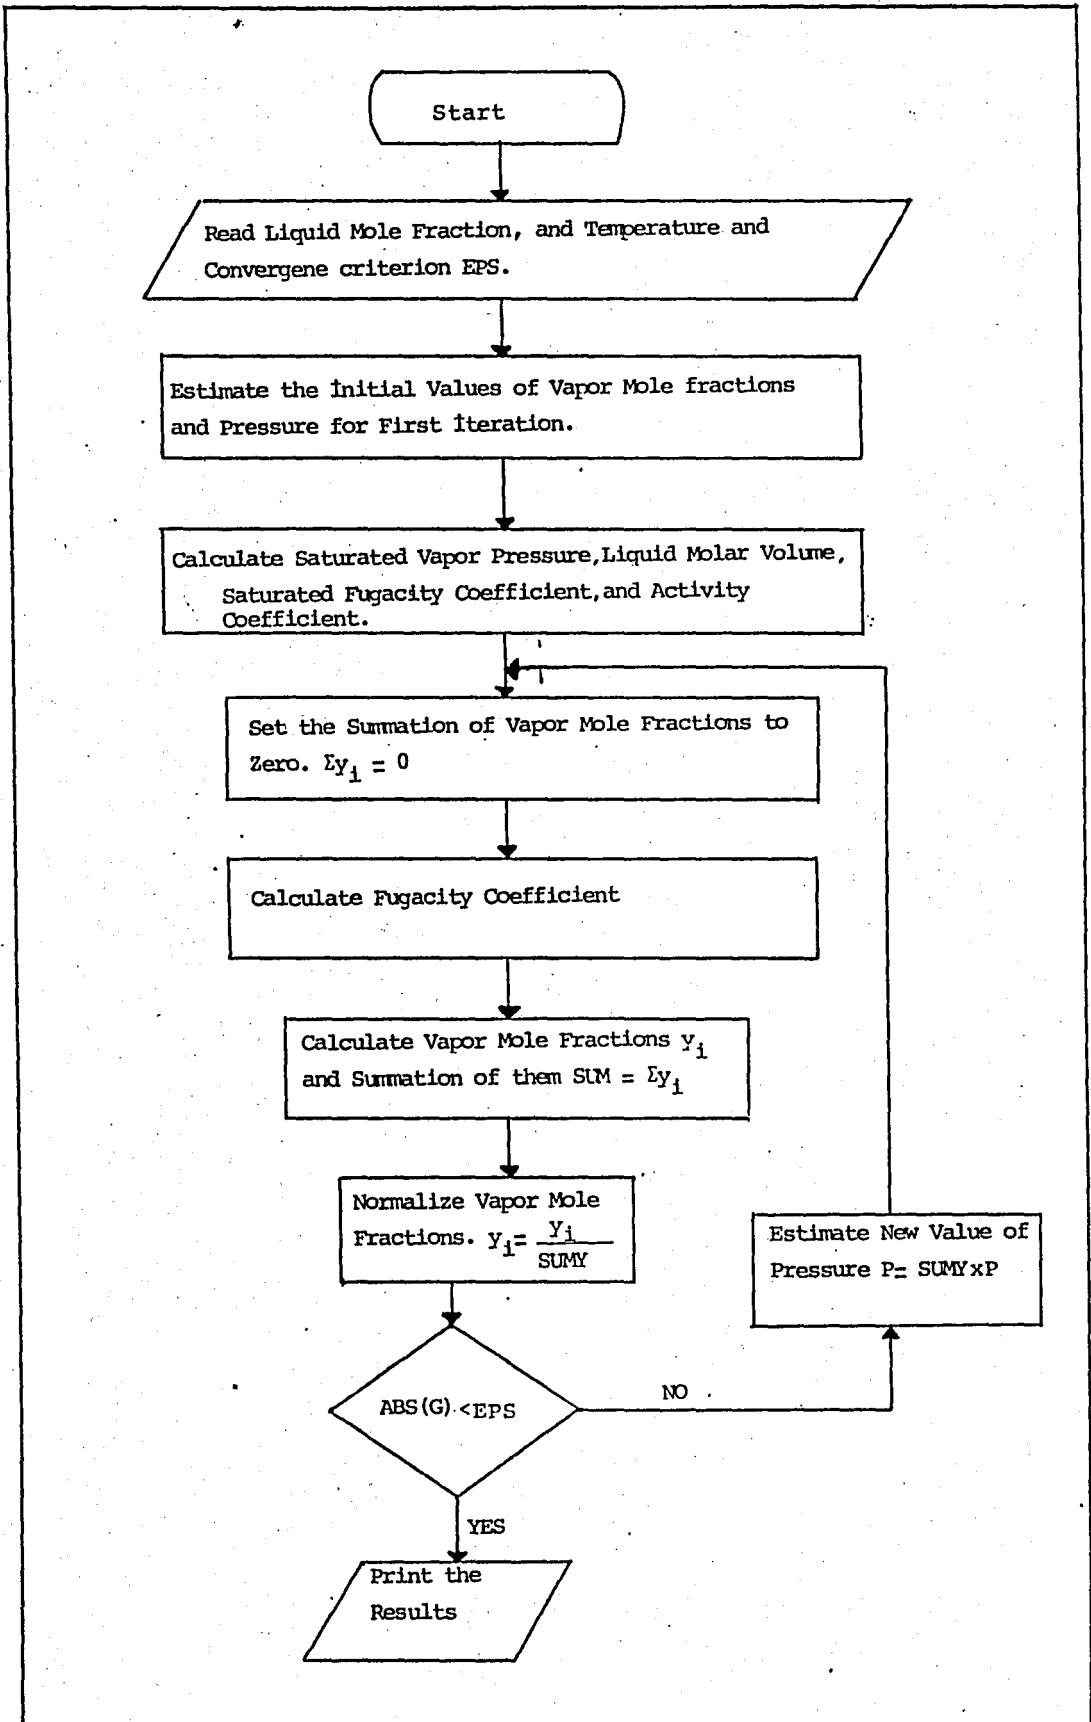


FIGURE 3.4. Flow Diagram for Bubble P Calculations (Program BUBP)

After reading vapor-mole fractions and pressure, the program estimates the temperature and liquid mole fractions for first iteration (Fig.(3.2)). Next, the program enters an iterative loop and following the calculations of the thermodynamic functions required in vapor-liquid equilibria, it estimates liquid mole fractions by applying Eq.(2.11) for the condensable components or Eq.(2.10) for noncondensable components. Then, the program calculates the objective function G , and normalizes predicted liquid mole fractions. Before repeating calculations for G at $T+\Delta T$ in Newton-Raphson formulation, it compares the function G at T with convergence criterion EPS . Next, it finds a new value of temperature for other iterations in Newton-Raphson formulation. All thermodynamic functions have to be recalculated for each temperature because of their temperature dependence. This iterative calculational procedure continues until the value of the objective function G becomes less than EPS . In this case, the program prints the results and stops.

The subroutine BUBT calculates bubble point temperature conditions. Calculational procedure of BUBT is the same as the procedure of DEWT and flow diagram can also be represented as given in Fig(3.2). In this case only, the notation of the mole fractions are different as given in parenthesis.

The subroutine DEWP, is the third main subroutine of the main program VLENC and is able to perform dew point pressure calculations (Fig.(3.3)). Program reads vapor compositions and temperature, and estimates the initial values of pressure and

liquid mole fractions. Then, it calculates saturated vapor pressure P_i^S , liquid molar volume V_i^L , and saturated fugacity coefficient ϕ_i^S , required in the prediction of liquid compositions. Since these functions are independent of pressure, they are not calculated for each additional pressure estimation. Next, the program enters into iterative scheme. After calculating fugacity coefficient $\hat{\phi}_i$, which is a function of P , and activity coefficient γ_i , which is a function of liquid mole fraction, the liquid mole fractions are predicted. Program normalizes the liquid mole fractions and compares the objective function for dew pressure (Eq.3.11) with the convergence criterion EPS. If the value of the difference is greater than EPS, it estimates the new value of pressure for next iteration using Eq. (3.13). Because of the linear behaviour of dew pressure or bubble pressure objective functions, Newton-Raphson iterative technique is not required to avoid unnecessary calculations. Iteration continues until objective function becomes less than EPS.

Last option of vapor-liquid calculations, bubble point pressure, is performed by the subroutine BUBP. The program reads temperature and liquid mole fractions (Fig 3.4). Next, it calculates all thermodynamic functions which are not functions of pressure and vapor mole fractions, except fugacity coefficient, which depends on pressure and vapor mole fractions. Then iterative scheme comes and only fugacity coefficient calculation takes place in this loop. After calculating vapor mole fractions, it compares the objective function for bubble point pressure with the convergence criterion, EPS (Eq.3.10) Unless the

objective function G , reaches a value less than EPS , it continues iterations by estimating a new value of pressure by Eq.(3.12).

The detailed description and listing of the programs are given in Appendix C.

4. RESULTS AND DISCUSSION

In this work, thirty three binary and four ternary systems were studied. Besides comparing the experimental and calculated results, UNIQUAC and UNIFAC results were compared with each other. For this purpose systems were selected such that the required parameters for the calculation of vapor-liquid equilibria are available in both UNIQUAC and UNIFAC parameter tables.

The program VLENC have been run for about 1500 data points. Because of the large number of calculations, some of the results are given as average absolute mean deviations from experimental data for the whole data set. Average absolute mean deviation (AMD) is calculated by :

$$AMD = \frac{\sum_{1}^{N} ABS (G_{\text{calculated}} - G_{\text{experimental}})}{N}$$

where G is any variable such as X,y,T or P, and N is the number of data points. Most of the calculations performed were bubble T and dew T type because, in literature, most experimental data are available at isobaric conditions. First thirty tables give the computational results for binary and ternary systems

for each experimental point. In Tables 4.1-4.30, for each system equilibrium results are given for both UNIQUAC and UNIFAC equations.

UNIQUAC and UNIFAC pure component and interaction parameters are presented in Appendix C. Even though for UNIQUAC, sometimes more than one interaction parameter is encountered in literature for a binary pair, in this work only one which gives best results for the system studied, is presented in the tables and in the data file.

Tables 4.1-4.4 presents dewT and bubbleT predictions of i-Propanol-2,2,4-Trimethyl pentane binary system. As it is seen in Tables 4.1 and 4.2, bubbleT predictions for that system performed by UNIQUAC are much better than by UNIFAC. Tables 4.3,4.4 give us the DewT results of the same system using UNIQUAC and UNIFAC, respectively. Here, also, the results obtained by UNIQUAC, although not as good as in the case of bubbleT predictions, are in better agreement with experimental results than those predicted by UNIFAC.

Tables 4.5-4.8 present the bubbleP and dewP predictions for the 2,2,4-trimethyl pentane and toluene binary system. In this case, the predictions by UNIFAC are slightly better than those of UNIQUAC. Also, for this system, dew point predictions are worser than bubble point predictions.

Tables 4.9-4.14 show that the phase equilibrium predictions

for n-hexane-ethanol, n-hexane-benzene and n-hexane-toluene binary systems by either UNIQUAC or UNIFAC equations are quite good.

Bubble point predictions for benzene i-propanol system by either UNIQUAC or UNIFAC, as it is seen in Tables 4.15 and 4.16, are in very good agreement with the experimental data.

By comparing Tables 4.17 and 4.18, it is observed that the predicted bubbleT results by UNIFAC for methanol-2-butanone system is very good and better than the results predicted by UNIQUAC. For this system, UNIQUAC interaction parameters obtained from experimental data in literature, should be rechecked.

In Tables 4.19-4.22, dewT and bubbleT results, respectively, for the binary systems of water-ethanol and water-methanol are given. Average mean deviations of liquid mole fractions, vapor mole fractions and temperature show that the results predicted either by UNIQUAC or UNIFAC, are in good agreement with the experimental VLE data.

In Tables 4.23-4.30, results of three different ternary systems are presented. The ternary systems contain components which are considered in the preceding tables. In Tables 4.23 and 4.24 bubbleT predictions for acetone-methanol-water ternary system are given. The absolute mean deviations in y_i s of the components are 0.0121, 0.0066, 0.0068 for acetone,

methanol, water, respectively, and absolute mean deviation in temperature is 0.8002 by using UNIQUAC. Although the predictions by UNIFAC are not as good as those obtained by UNIQUAC they are still in good agreement with experimental data.

Comparison of Tables 4.25 and 4.26 shows that for 2-butanone-n-heptane-toluene ternary system, also UNIQUAC predictions are better than those obtained UNIFAC.

The last ternary system whose results are tabulated point by point, is the methanol-carbon tetrachloride-benzene system. As it is seen from Tables 4.27 and 4.28 bubbleP calculation by UNIQUAC gives excellent results. The mean deviation in pressure is 0.014 atm, which is quite acceptable for a system pressure of about 0.9 atm. The results obtained at the same conditions by UNIFAC, are worse than those obtained by UNIQUAC. The absolute mean deviations in y_1 and in pressure are about 10 times of those obtained with UNIQUAC.

Tables 4.29 and 4.30 give the results of dewT calculations for the previous system. As observed in previous cases, dew point predictions by UNIQUAC are not as good as bubble point predictions. However, in this case, UNIFAC dew point predictions are slightly better than UNIFAC bubble point predictions.

In the next six tables, Tables 4.31-4.36, the predictions are given on the basis of whole data set for each system. In these tables, experimental data are compared with the calculated

results using UNIQUAC, UNIFAC and Raoult's law.

The computational results are given as absolute mean deviations both in compositions and in temperature or in pressure, for the whole data set of each system. It is seen that the results obtained by either of UNIQUAC and UNIFAC are in much better agreement with experimental data than obtained by Raoult's law.

Table 4.31 presents VLE calculation results for the binary systems containing various alcohols and aromatics. It is seen that VLE calculations by UNIQUAC give an average absolute mean deviation of 0.0309 in y_i 's. This is an acceptable error. In the case of calculations by UNIFAC, average absolute mean of 0.0205 in y_i 's is obtained. This is slightly better than that obtained by UNIQUAC. Largest errors are encountered in dew pressure calculations. The temperatures and pressures predicted both by UNIFAC and UNIQUAC are quite acceptable.

In Table 4.33, one observes that the VLE predictions for alkane-alcohol systems by UNIQUAC and UNIFAC, range from good to moderate.

Table 4.32 shows that the VLE predictions for the binary systems containing alkanes and aromatics yield quite low absolute mean deviations. These are the smallest absolute mean deviations obtained among all systems studied in this work.

In Tables, 4.34 and 4.35, VLE predictions are given for alcohol-water and ketone-alcohol binary systems, respectively. The absolute mean deviations in compositions and in temperature exhibit moderate errors for both of UNIQUAC and UNIFAC. Only for methanol-2-butanone system, large deviations are observed when UNIQUAC is used.

The VLE predictions for ternary systems run in this work, are tabulated in Table 4.36. The results of some of these systems are given in previous tables point by point. As it is seen, the VLE predictions for ternary systems give acceptable errors, although not as good as binary systems. But, for water-formic acid-acetic acid system the predictions are not too good, especially when UNIFAC is used. In this case, results obtained by UNIFAC are comparable to those obtained by Raoult's law.

Tables 4.37-4.39 give VLE predictions for ethanol-water, acetone-water, and methanol-water systems at various pressures. It can be seen that although the errors slightly increase with increase in pressure, they are in the acceptable limits. At low pressures, the fugacity coefficient does not go below 0.95. It is mostly around 0.98 or very close to unity. So, at low pressures, vapor phase can be assumed to be ideal. But at higher pressures, higher vapor phase nonidealities are obtained and thus, use of Peng-Robinson equation in VLE calculations, is justified.

In Tables 4.40 and 4.43, bubbleT results for acetone-water and ethanol-water binaries are given for quite high pressures. Since the pressures are high, fugacity coefficients take on values of 0.81 or above. In order to show the influence of pressure and thus of fugacity coefficients, in Tables 4.44 and 4.45, the absolute mean deviations for methanol-water and acetone-water binary systems at various pressures, are compared with those values obtained by using ideal gas assumption. The last column presents the difference in absolute mean deviations obtained by Peng-Robinson equation and ideal gas equation.

In this study, the aim was to develop a computer program to do VLE calculations for multicomponent systems and then to search for the applicability of UNIFAC and UNIQUAC equations for various systems with available experimental data. Comparison of all results show that bubble point predictions are better than dew point predictions. Dew P predictions are not as good as the others.

Finally, it can be said that the VLE predictions for the systems studied in this work containing condensable components, generally show good agreement with experimental data except for a few systems. Although agreement between the results predicted by UNIFAC and UNIQUAC are observed in general UNIQUAC gives better results for ternary systems studied.

Even though the influence of vapor phase nonideality is not much at low pressure, it must be considered for accurate

design calculations in the case of pressures above a few atmospheres.

Unfortunately, the results for the systems containing noncondensable components are not encouraging. In Tables 4.46 and 4.47, the predictions are presented for two binary systems, where one of the components is noncondensable. The predictions nitrogen-n-butane system shows that as the composition of noncondensable component in liquid phase goes to zero, the deviations in composition and in pressure becomes very small. This is expected because the equations used here are for noncondensable components at infinite dilution. Predictions of hydrogen-n-hexane system are quite good for vapor-phase composition but not for pressures. Thus, for systems containing noncondensables, the results are not as good as those obtained for systems containing only condensables.

TABLE 4.1. Bubble T Results for i-Propanol(1)-2,2,4
Trimethyl Pentane(2) System Using UNIQUAC(15).

PRESSURE= 1.000 ATM

DATA	COMP	GIVEN				CALCULATED		
		X	YE	TE	T	GAMA	FHI	Y
1	1	.0290	.1770	366.65	365.87	4.3765	.9670	.1864
	2	.9710	.8230			1.0016	.9522	.8136
2	1	.0580	.2930	362.55	361.79	3.9934	.9652	.2939
	2	.9420	.7070			1.0065	.9508	.7061
3	1	.1210	.4350	356.75	356.83	3.2779	.9631	.4187
	2	.8790	.5650			1.0277	.9491	.5813
4	1	.2300	.5260	353.35	353.17	2.4361	.9616	.5141
	2	.7700	.4740			1.0960	.9478	.4859
5	1	.3310	.5550	352.25	351.72	1.9695	.9609	.5595
	2	.6690	.4450			1.1959	.9473	.4405
6	1	.3905	.5730	351.75	351.23	1.7430	.9607	.5789
	2	.6095	.4270			1.2740	.9471	.4211
7	1	.5170	.6020	350.95	350.65	1.4278	.9604	.6134
	2	.4830	.3980			1.5036	.9470	.3866
8	1	.6130	.6300	350.75	350.46	1.2644	.9603	.6394
	2	.3870	.3700			1.7608	.9469	.3606
9	1	.6765	.6545	350.45	350.45	1.1820	.9603	.6594
	2	.3235	.3455			1.9900	.9470	.3406
10	1	.8000	.7200	351.25	350.85	1.0684	.9605	.7160
	2	.2000	.2800			2.6513	.9473	.2840
11	1	.8780	.7800	351.55	351.67	1.0250	.9608	.7789
	2	.1220	.2200			3.2993	.9479	.2211
12	1	.9575	.8950	353.35	353.58	1.0029	.9618	.8951
	2	.0425	.1050			4.2377	.9495	.1049

ERROR ON Y(1)= ABS(Y(1)-YE(1))/DATA POINTS= .0067

ERROR ON TEMPERATURE= ABS(T-TE)/DATA POINTS= .35

TABLE 4.2. Bubble T Results for i-Propanol(1)-2,2,4
Trimethyl Pentane(2) System Using UNIFAC(15).

PRESSURE= 1.000 ATM

DATA	COMP	GIVEN				CALCULATED		
		X	YE	TE	T	GAMA	FHI	Y
1	1	.0290	.1770	366.65	360.72	8.3801	.9648	.2966
	2	.9710	.8230			1.0033	.9504	.7034
2	1	.0580	.2930	362.55	355.44	7.0768	.9626	.4111
	2	.9420	.7070			1.0128	.9485	.5889
3	1	.1210	.4350	356.75	350.86	4.9791	.9606	.5048
	2	.8790	.5650			1.0510	.9468	.4952
4	1	.2300	.5260	353.35	348.79	3.1005	.9597	.5502
	2	.7700	.4740			1.1633	.9460	.4498
5	1	.3310	.5550	352.25	348.32	2.2500	.9595	.5638
	2	.6690	.4450			1.3180	.9459	.4362
6	1	.3905	.5730	351.75	348.19	1.9336	.9594	.5688
	2	.6095	.4270			1.4358	.9458	.4312
7	1	.5170	.6020	350.95	348.04	1.4984	.9594	.5800
	2	.4830	.3980			1.7736	.9458	.4200
8	1	.6130	.6300	350.75	348.01	1.2957	.9593	.5940
	2	.3870	.3700			2.1419	.9458	.4060
9	1	.6765	.6545	350.45	348.09	1.1995	.9594	.6087
	2	.3235	.3455			2.4632	.9459	.3913
10	1	.8000	.7200	351.25	348.78	1.0738	.9596	.6626
	2	.2000	.2800			3.3619	.9463	.3374
11	1	.8780	.7800	351.55	350.02	1.0275	.9601	.7314
	2	.1220	.2200			4.2192	.9470	.2686
12	1	.9575	.8950	353.35	352.77	1.0034	.9614	.8680
	2	.0425	.1050			5.4682	.9489	.1320

ERROR ON Y(1)= ABS(Y(1)-YE(1))/DATA POINTS= .0485

ERROR ON TEMPERATURE= ABS(T-TE)/DATA POINTS= 3.63

TABLE 4.3. Dew T Results for i-Propanol(1)-2,2,4 Trimethyl
Pentane(2) System Using UNIQUAC(15).

PRESSURE= 1.000 ATM

DATA	COMP	GIVEN				CALCULATED		
		Y	XE	TE	T	GAMA	FHI	X
1	1	.1770	.0290	366.65	366.22	4.4026	.9671	.0270
	2	.8230	.9710			1.0014	.9523	.9730
2	1	.2930	.0580	362.55	361.83	3.9911	.9653	.0578
	2	.7070	.9420			1.0065	.9508	.9422
3	1	.4350	.1210	356.75	356.18	3.1490	.9629	.1341
	2	.5650	.8790			1.0340	.9488	.8659
4	1	.5260	.2300	353.35	352.76	2.3000	.9614	.2533
	2	.4740	.7700			1.1165	.9476	.7467
5	1	.5550	.3310	352.25	351.85	1.9882	.9610	.3204
	2	.4450	.6690			1.1845	.9473	.6796
6	1	.5730	.3905	351.75	351.37	1.7948	.9608	.3733
	2	.4270	.6095			1.2511	.9472	.6267
7	1	.6020	.5170	350.95	350.80	1.5128	.9605	.4760
	2	.3980	.4830			1.4201	.9470	.5240
8	1	.6300	.6130	350.75	350.50	1.3227	.9604	.5764
	2	.3700	.3870			1.6484	.9469	.4236
9	1	.6545	.6765	350.45	350.44	1.2036	.9603	.6596
	2	.3455	.3235			1.9138	.9470	.3404
10	1	.7200	.8000	351.25	350.89	1.0651	.9605	.8055
	2	.2800	.2000			2.6842	.9474	.1945
11	1	.7800	.8780	351.55	351.69	1.0250	.9608	.8787
	2	.2200	.1220			3.2995	.9479	.1213
12	1	.8950	.9575	353.35	353.58	1.0029	.9618	.9574
	2	.1050	.0425			4.2366	.9495	.0426

ERROR ON X(1)= ABS(X(1)-XE(1))/DATA POINTS= .01391

ERROR ON T= ABS(TE-T)/DATA POINTS= .35

TABLE 4.4. Dew T results for i-Propanol(1)-2,2,4 Trimethyl
Pentane(2) System Using UNIFAC(15).

PRESSURE= 1.000 ATM

DATA	COMP	GIVEN				CALCULATED		
		Y	XE	TE	T	GAMA	FHI	X
1	1	.1770	.0290	366.65	365.74	9.0816	.9669	.0133
	2	.8230	.9710			1.0007	.9521	.9867
2	1	.2930	.0580	362.55	360.88	8.3996	.9649	.0284
	2	.7070	.9420			1.0032	.9505	.9716
3	1	.4350	.1210	356.75	354.29	6.6286	.9621	.0685
	2	.5650	.8790			1.0178	.9481	.9315
4	1	.5260	.2300	353.35	349.85	4.1710	.9602	.1567
	2	.4740	.7700			1.0825	.9464	.8433
5	1	.5550	.3310	352.25	348.60	2.7317	.9596	.2653
	2	.4450	.6690			1.2132	.9460	.7347
6	1	.5730	.3905	351.75	348.12	1.6629	.9594	.4589
	2	.4270	.6095			1.6054	.9458	.5411
7	1	.6020	.5170	350.95	348.04	1.2450	.9594	.6458
	2	.3980	.4830			2.2914	.9458	.3542
8	1	.6300	.6130	350.75	348.31	1.1311	.9594	.7360
	2	.3700	.3870			2.8348	.9460	.2640
9	1	.6545	.6765	350.45	348.65	1.0857	.9596	.7856
	2	.3455	.3235			3.2246	.9462	.2144
10	1	.7200	.8000	351.25	349.80	1.0328	.9601	.8674
	2	.2800	.2000			4.0750	.9469	.1326
11	1	.7800	.8780	351.55	350.99	1.0141	.9606	.9131
	2	.2200	.1220			4.7099	.9476	.0869
12	1	.8950	.9575	353.35	353.32	1.0019	.9617	.9679
	2	.1050	.0425			5.6702	.9494	.0321

ERROR ON X(1)= ABS(X(1)-XE(1))/DATA POINTS= .06491

ERROR ON T= ABS(TE-T)/DATA POINTS= 2.08

TABLE 4.5. Bubble P Results for 2,2,4 Trimethyl Pentane(1)
- Toluene (2) System Using UNIQUAC(15).

TEMPERATURE= 373.15 K

DATA	COMP	GIVEN				CALCULATED		
		X	YE	PE	P	GAMA	FHI	Y
1	1	.1000	.1700	.795	.785	1.2035	.9649	.1543
	2	.9000	.8300			1.0041	.9728	.8452
2	1	.2000	.2999	.847	.826	1.1356	.9629	.2781
	2	.8000	.7001			1.0143	.9714	.7219
3	1	.3000	.4049	.889	.861	1.0889	.9613	.3846
	2	.7000	.5951			1.0284	.9703	.6154
4	1	.4000	.4945	.922	.891	1.0566	.9599	.4815
	2	.6000	.5055			1.0451	.9693	.5185
5	1	.5000	.5754	.949	.918	1.0344	.9588	.5728
	2	.5000	.4246			1.0633	.9686	.4272
6	1	.6000	.6437	.969	.942	1.0194	.9577	.6608
	2	.4000	.3563			1.0823	.9679	.3392
7	1	.7000	.7319	.985	.954	1.0097	.9569	.7469
	2	.3000	.2681			1.1016	.9674	.2531
8	1	.8000	.8201	.998	.984	1.0039	.9564	.8318
	2	.2000	.1799			1.1209	.9672	.1682
9	1	.9000	.9102	1.010	1.001	1.0009	.9569	.9160
	2	.1000	.0898			1.1398	.9676	.0840

ERROR ON Y(1)= ABS(YE(1)-Y(1)/DATA POINTS= .0136

ERROR ON P= ABS(PE-P)/DATA POINTS= .022

TABLE 4.6. Bubble P Results for 2,2,4 Trimethyl Pentane(1)
- Toluene (2) System Using UNIFAC(15).

TEMPERATURE= 373.15 K

DATA	COMP	GIVEN				CALCULATED		
		X	YE	PE	P	GAMA	FHI	Y
1	1	.1000	.1700	.795	.807	1.4078	.9639	.1763
	2	.9000	.8300			1.0056	.9720	.8237
2	1	.2000	.2999	.847	.863	1.2895	.9613	.3030
	2	.8000	.7001			1.0212	.9701	.6970
3	1	.3000	.4049	.889	.905	1.2011	.9593	.4042
	2	.7000	.5951			1.0455	.9688	.5958
4	1	.4000	.4945	.922	.939	1.1352	.9578	.4919
	2	.6000	.5055			1.0777	.9677	.5081
5	1	.5000	.5754	.949	.966	1.0866	.9566	.5730
	2	.5000	.4246			1.1169	.9669	.4270
6	1	.6000	.6437	.969	.987	1.0515	.9557	.6518
	2	.4000	.3563			1.1625	.9664	.3482
7	1	.7000	.7319	.985	1.003	1.0270	.9551	.7315
	2	.3000	.2681			1.2142	.9661	.2685
8	1	.8000	.8201	.998	1.013	1.0113	.9550	.8145
	2	.2000	.1799			1.2717	.9661	.1855
9	1	.9000	.9102	1.010	1.019	1.0027	.9558	.9032
	2	.1000	.0898			1.3346	.9668	.0968

ERROR ON Y(1)= ABS(YE(1)-Y(1)/DATA POINTS= .0040

ERROR ON P= ABS(PE-P)/DATA POINTS= .015

TABLE 4.7. Dew P Results for 2,2,4 Trimethyl Pentane(1)-
Toluene(2) System Using UNIQUAC(15).

TEMPERATURE= 373.15 K

		GIVEN				CALCULATED		
DATA	COMP	Y	XE	PE	P	GAMA	FHI	X
1	1	.1700	.1000	.795	.789	1.1944	.9647	.1114
2	2	.8300	.9000			1.0050	.9726	.8886
2	1	.2999	.2000	.847	.833	1.1250	.9626	.2196
2	2	.7001	.8000			1.0168	.9712	.7804
3	1	.4049	.3000	.889	.867	1.0813	.9610	.3204
2	2	.5951	.7000			1.0317	.9701	.6796
4	1	.4945	.4000	.922	.894	1.0529	.9598	.4140
2	2	.5055	.6000			1.0476	.9692	.5860
5	1	.5754	.5000	.949	.918	1.0339	.9587	.5029
2	2	.4246	.5000			1.0639	.9686	.4971
6	1	.6437	.6000	.969	.937	1.0219	.9579	.5804
2	2	.3563	.4000			1.0786	.9681	.4196
7	1	.7319	.7000	.985	.960	1.0111	.9571	.6825
2	2	.2681	.3000			1.0982	.9675	.3175
8	1	.8201	.8000	.998	.981	1.0045	.9565	.7862
2	2	.1799	.2000			1.1182	.9672	.2138
9	1	.9102	.9000	1.010	1.000	1.0010	.9568	.8931
2	2	.0898	.1000			1.1385	.9675	.1069

ERROR ON X(1)= ABS(XE(1)-X(1))/DATA POINTS= .0140

ERROR ON PRESSURE= ABS(PE-P)/DATA POINTS= .021

TABLE 4.8. Dew P Results for 2,2,4 Trimethyl Pentane(1)-
Toluene(2) System Using UNIFAC(15).

TEMPERATURE= 373.15 K

		GIVEN				CALCULATED		
DATA	COMP	Y	XE	PE	P	GAMA	FHI	X
1	1	.1700	.1000	.795	.789	1.2213	.9647	.1088
2	2	.8300	.9000			1.0014	.9726	.8912
2	1	.2999	.2000	.847	.836	1.1932	.9625	.2078
2	2	.7001	.8000			1.0059	.9710	.7922
3	1	.4049	.3000	.889	.877	1.1662	.9606	.3004
2	2	.5951	.7000			1.0138	.9697	.6996
4	1	.4945	.4000	.922	.913	1.1395	.9590	.3900
2	2	.5055	.6000			1.0263	.9686	.6100
5	1	.5754	.5000	.949	.944	1.1126	.9576	.4801
2	2	.4246	.5000			1.0455	.9677	.5199
6	1	.6437	.6000	.969	.970	1.0880	.9565	.5633
2	2	.3563	.4000			1.0714	.9669	.4367
7	1	.7319	.7000	.985	.998	1.0555	.9553	.6786
2	2	.2681	.3000			1.1266	.9662	.3214
8	1	.8201	.8000	.998	1.018	1.0263	.9548	.7970
2	2	.1799	.2000			1.2206	.9660	.2030
9	1	.9102	.9000	1.010	1.025	1.0063	.9557	.9092
2	2	.0898	.1000			1.3716	.9667	.0908

ERROR ON X(1)= ABS(XE(1)-X(1))/DATA POINTS= .0130

ERROR ON PRESSURE= ABS(PE-P)/DATA POINTS= .010

TABLE 4.9. Bubble T Results for n-Hexane(1)-Ethanol(2)
System Using UNIQUAC(15)

PRESSURE= 1.000 ATM

DATA	COMP	GIVEN				CALCULATED		
		X	YE	TE	T	GAMA	FHI	Y
1	1	.0930	.4740	333.21	337.63	5.7808	.9586	.4717
	2	.9070	.5260			1.0239	.9767	.5283
2	1	.1898	.5900	334.16	333.75	3.8995	.9571	.5752
	2	.8102	.4100			1.0904	.9763	.4248
3	1	.2965	.6140	332.89	332.24	2.8110	.9566	.6172
	2	.7035	.3860			1.2098	.9762	.3828
4	1	.3885	.6350	332.17	331.70	2.2474	.9564	.6353
	2	.6115	.3650			1.3537	.9761	.3647
5	1	.4999	.6460	331.83	331.39	1.8019	.9562	.6490
	2	.5001	.3540			1.6208	.9762	.3510
6	1	.5988	.6570	331.67	331.28	1.5317	.9562	.6584
	2	.4012	.3430			1.9764	.9762	.3416
7	1	.6930	.6710	331.54	331.26	1.3417	.9562	.6671
	2	.3070	.3290			2.5191	.9762	.3329
8	1	.8021	.6760	331.68	331.39	1.1765	.9563	.6799
	2	.1979	.3240			3.7363	.9763	.3201
9	1	.9084	.7150	332.56	332.04	1.0575	.9565	.7068
	2	.0916	.2850			7.1838	.9766	.2932

ERROR ON Y(1)= ABS(Y(1)-YE(1))/DATA POINTS= .0046

ERROR ON TEMPERATURE= ABS(T-TE)/DATA POINTS= .45

TABLE 4.10. Bubble T Results for n-Hexane(1)-Ethanol(2)
System Using UNIFAC(15)

PRESSURE= 1.000 ATM

DATA	COMP	GIVEN				CALCULATED		
		X	YE	TE	T	GAMA	FHI	Y
1	1	.0930	.4740	333.21	339.38	5.0510	.9593	.4350
	2	.9070	.5260			1.0164	.9769	.5650
2	1	.1898	.5900	334.16	334.50	3.7728	.9574	.5700
	2	.8102	.4100			1.0680	.9764	.4300
3	1	.2965	.6140	332.89	332.38	2.8450	.9566	.6274
	2	.7035	.3860			1.1709	.9763	.3726
4	1	.3885	.6350	332.17	331.67	2.2935	.9563	.6491
	2	.6115	.3650			1.3094	.9762	.3509
5	1	.4999	.6460	331.83	331.38	1.8338	.9562	.6603
	2	.5001	.3540			1.5697	.9762	.3397
6	1	.5988	.6570	331.67	331.34	1.5405	.9562	.6634
	2	.4012	.3430			1.9426	.9762	.3366
7	1	.6930	.6710	331.54	331.34	1.3327	.9562	.6642
	2	.3070	.3290			2.5332	.9762	.3358
8	1	.8021	.6760	331.68	331.39	1.1566	.9563	.6634
	2	.1979	.3240			3.8710	.9763	.3316
9	1	.9084	.7150	332.56	332.25	1.0418	.9566	.7009
	2	.0916	.2850			7.2616	.9767	.2991

ERROR ON Y(1)= ABS(Y(1)-YE(1))/DATA POINTS= .0151

ERROR ON TEMPERATURE= ABS(T-TE)/DATA POINTS= .46

TABLE 4.11. Dew T Results for n-Hexane(1)-Benzene(2)
System Using UNIQUAC(15)

PRESSURE= 1.000 ATM

		GIVEN				CALCULATED		
DATA	COMP	Y	XE	TE	T	GAMA	FHI	X

1	1	.1400	.0730	350.75	350.71	1.4594	.9623	.0744
	2	.8600	.9270			1.0030	.9707	.9256
2	1	.2680	.1720	348.25	348.43	1.3444	.9615	.1648
	2	.7320	.8280			1.0144	.9703	.8352
3	1	.3760	.2680	346.55	346.63	1.2433	.9609	.2621
	2	.6240	.7320			1.0351	.9700	.7379
4	1	.4600	.3720	345.15	345.37	1.1793	.9605	.3521
	2	.5400	.6280			1.0617	.9698	.6479
5	1	.5400	.4620	344.05	344.31	1.1223	.9601	.4480
	2	.4600	.5380			1.0976	.9697	.5520
6	1	.6440	.5850	343.15	343.22	1.0652	.9598	.5814
	2	.3560	.4150			1.1602	.9696	.4186
7	1	.7250	.6920	342.55	342.60	1.0348	.9597	.6863
	2	.2750	.3080			1.2201	.9697	.3137
8	1	.8070	.7920	342.25	342.19	1.0151	.9599	.7885
	2	.1930	.2080			1.2877	.9699	.2115
9	1	.8380	.8280	342.15	342.09	1.0101	.9600	.8255
	2	.1620	.1720			1.3145	.9700	.1745
10	1	.8880	.8830	342.05	341.99	1.0045	.9605	.8823
	2	.1120	.1170			1.3585	.9704	.1172
11	1	.9500	.9470	341.95	342.00	1.0008	.9626	.9497
	2	.0500	.0530			1.4136	.9720	.0503
12	1	.9640	.9620	341.95	342.05	1.0004	.9641	.9641
	2	.0360	.0380			1.4260	.9730	.0359

ERROR ON X(1)= ABS(X(1)-XE(1))/DATA POINTS= .0057

ERROR ON T= ABS(TE-T)/DATA POINTS= .10

TABLE 4.12. DewT Results for n-Hexane(1)-Benzene(2)
System Using UNIFAC(15)

PRESSURE= 1.000 ATM

		GIVEN				CALCULATED		
DATA	COMP	Y	XE	TE	T	GAMA	FHI	X

1	1	.1400	.0730	350.75	350.46	1.6076	.9622	.0680
	2	.8600	.9270			1.0037	.9707	.9320
2	1	.2680	.1720	348.25	347.98	1.4344	.9614	.1565
	2	.7320	.8280			1.0185	.9702	.8435
3	1	.3760	.2680	346.55	346.07	1.2933	.9607	.2572
	2	.6240	.7320			1.0468	.9698	.7428
4	1	.4600	.3720	345.15	344.77	1.1983	.9603	.3526
	2	.5400	.6280			1.0828	.9696	.6474
5	1	.5400	.4620	344.05	343.75	1.1265	.9599	.4533
	2	.4600	.5380			1.1293	.9695	.5462
6	1	.6440	.5850	343.15	342.77	1.0622	.9597	.5909
	2	.3560	.4150			1.2044	.9695	.4091
7	1	.7250	.6920	342.55	342.27	1.0315	.9596	.6953
	2	.2750	.3080			1.2698	.9696	.3047
8	1	.8070	.7920	342.25	341.98	1.0132	.9598	.7951
	2	.1930	.2080			1.3382	.9698	.2049
9	1	.8380	.8280	342.15	341.92	1.0087	.9600	.8309
	2	.1620	.1720			1.3640	.9700	.1591
10	1	.8880	.8830	342.05	341.88	1.0038	.9605	.8863
	2	.1120	.1170			1.4053	.9704	.1137
11	1	.9500	.9470	341.95	341.96	1.0007	.9626	.9510
	2	.0500	.0530			1.4551	.9720	.0490
12	1	.9640	.9620	341.95	342.02	1.0003	.9641	.9650
	2	.0360	.0380			1.4661	.9730	.0350

ERROR ON X(1)= ABS(X(1)-XE(1))/DATA POINTS= .0070

ERROR ON T= ABS(TE-T)/DATA POINTS= .26

TABLE 4.13. Bubble T Results for n-Hexane(1)-Toluene(2)
System Using UNIQUAC(15)

PRESSURE=1. ATM

DATA	COMP	GIVEN				CALCULATED		
		X	YE	TE	T	GAMA	FHI	Y
1	1	.1000	.3100	374.10	374.29	1.3130	.9681	.3098
	2	.9000	.6900			1.0026	.9656	.6902
2	1	.1963	.4840	367.55	367.53	1.2517	.9665	.4922
	2	.8040	.5160			1.0103	.9639	.5078
3	1	.2540	.5630	364.00	364.21	1.2189	.9657	.5718
	2	.7460	.4370			1.0176	.9631	.4282
4	1	.3523	.6640	359.50	359.52	1.1694	.9646	.6739
	2	.6480	.3360			1.0352	.9619	.3261
5	1	.3920	.6970	358.50	357.88	1.1511	.9641	.7074
	2	.6080	.3030			1.0445	.9615	.2926
6	1	.4430	.7420	355.65	355.96	1.1291	.9637	.7450
	2	.5570	.2580			1.0584	.9610	.2550
7	1	.5080	.7770	354.15	353.75	1.1035	.9632	.7865
	2	.4920	.2230			1.0800	.9605	.2135
8	1	.5790	.8220	351.65	351.61	1.0783	.9627	.8255
	2	.4210	.1780			1.1093	.9600	.1745
9	1	.6050	.8320	350.95	350.87	1.0699	.9625	.8385
	2	.3950	.1680			1.1218	.9598	.1615
10	1	.6400	.8480	349.90	349.93	1.0591	.9624	.8552
	2	.3600	.1520			1.1403	.9596	.1448
11	1	.7070	.8800	348.00	348.25	1.0407	.9621	.8848
	2	.2930	.1200			1.1817	.9593	.1152
12	1	.7300	.8900	347.35	347.70	1.0350	.9621	.8944
	2	.2700	.1100			1.1980	.9592	.1056
13	1	.7700	.9070	346.65	346.78	1.0261	.9620	.9107
	2	.2300	.0930			1.2292	.9592	.0893
14	1	.8130	.9270	345.40	345.84	1.0177	.9621	.9276
	2	.1870	.0730			1.2675	.9592	.0724
15	1	.8690	.9480	344.30	344.67	1.0091	.9627	.9492
	2	.1310	.0520			1.3258	.9596	.0508

ERROR ON Y(1)= ABS(Y(1)-YE(1))/DATA POINTS= .0055

ERROR ON TEMPERATURE= ABS(T-TE)/DATA POINTS= .23

TABLE 4.14. Bubble T Results for n-Hexane(1)-Toluene(2)
System Using UNIFAC(15)

PRESSURE=1. ATM

DATA	COMP	GIVEN				CALCULATED		
		X	YE	TE	T	GAMA	FHI	Y
1	1	.1000	.3100	374.10	373.60	1.3895	.9680	.3226
	2	.9000	.6900			1.0041	.9654	.6774
2	1	.1960	.4840	367.55	366.70	1.3037	.9663	.5022
	2	.8040	.5160			1.0160	.9637	.4973
3	1	.2540	.5630	364.00	363.42	1.2579	.9655	.5784
	2	.7460	.4370			1.0271	.9629	.4216
4	1	.3520	.6640	359.50	358.90	1.1906	.9644	.6750
	2	.6480	.3360			1.0530	.9617	.3250
5	1	.3920	.6970	358.50	357.33	1.1665	.9640	.7065
	2	.6080	.3030			1.0663	.9613	.2935
6	1	.4430	.7420	355.65	355.51	1.1384	.9635	.7422
	2	.5570	.2580			1.0858	.9609	.2578
7	1	.5080	.7770	354.15	353.43	1.1069	.9631	.7820
	2	.4920	.2230			1.1147	.9604	.2180
8	1	.5790	.8220	351.65	351.39	1.0775	.9626	.8201
	2	.4210	.1780			1.1521	.9599	.1799
9	1	.6050	.8320	350.95	350.70	1.0680	.9625	.8330
	2	.3950	.1680			1.1674	.9597	.1670
10	1	.6400	.8480	349.90	349.80	1.0563	.9623	.8496
	2	.3600	.1520			1.1894	.9595	.1504
11	1	.7070	.8800	348.00	348.17	1.0370	.9620	.8798
	2	.2930	.1200			1.2366	.9592	.1202
12	1	.7300	.8900	347.35	347.64	1.0314	.9620	.8897
	2	.2700	.1100			1.2544	.9592	.1103
13	1	.7700	.9070	346.65	346.74	1.0227	.9620	.9066
	2	.2300	.0930			1.2874	.9591	.0934
14	1	.8130	.9270	345.40	345.81	1.0150	.9621	.9244
	2	.1870	.0730			1.3260	.9591	.0756
15	1	.8690	.9480	344.30	344.64	1.0074	.9625	.9471
	2	.1310	.0520			1.3815	.9595	.0529

ERROR ON Y(1)= ABS(Y(1)-YE(1))/DATA POINTS= .0054

ERROR ON TEMPERATURE= ABS(T-TE)/DATA POINTS= .43

TABLE 4.15. Bubble P Results for Benzene(1)-i-Propanol(2)
System Using UNIQUAC(15)

TEMPERATURE= 298.15 K

DATA	COMP	GIVEN			CALCULATED			
		X	YE	PE	P	GAMA	Y	FHI
1	1	.0760	.3650	.087	.086	3.1625	.3517	.9963
	2	.9240	.6350			1.0057	.6483	.9940
2	1	.1640	.5300	.111	.107	2.6908	.5184	.9953
	2	.8360	.4700			1.0282	.4816	.9926
3	1	.3000	.6350	.131	.127	2.1295	.6341	.9945
	2	.7000	.3650			1.1039	.3659	.9913
4	1	.4790	.7120	.139	.139	1.6227	.7039	.9939
	2	.5210	.2880			1.3149	.2961	.9905
5	1	.6380	.7450	.143	.143	1.3233	.7412	.9937
	2	.3620	.2550			1.7063	.2588	.9902
6	1	.8540	.7950	.143	.144	1.0705	.8003	.9937
	2	.1460	.2050			3.2741	.1997	.9903
7	1	.9410	.8700	.138	.139	1.0146	.8647	.9940
	2	.0590	.1300			5.3074	.1353	.9907

ERROR ON Y(1)= ABS(YE(1)-Y(1)/DATA POINTS= .0069

ERROR ON P= ABS(PE-P)/DATA POINTS= .002

TABLE 4.16. Bubble P Results for Benzene(1)-i-Propanol(2)
System Using UNIFAC(15)

TEMPERATURE= 298.15 K

DATA	COMP	GIVEN			CALCULATED			
		X	YE	PE	P	GAMA	Y	FHI
1	1	.0760	.3650	.087	.086	3.1465	.3507	.9963
	2	.9240	.6350			1.0053	.6493	.9940
2	1	.1640	.5300	.111	.107	2.7087	.5206	.9953
	2	.8360	.4700			1.0262	.4794	.9926
3	1	.3000	.6350	.131	.128	2.1708	.6398	.9944
	2	.7000	.3650			1.0977	.3602	.9912
4	1	.4790	.7120	.139	.141	1.6582	.7098	.9938
	2	.5210	.2880			1.3062	.2902	.9904
5	1	.6380	.7450	.143	.145	1.3408	.7428	.9937
	2	.3620	.2550			1.7146	.2572	.9901
6	1	.8540	.7950	.143	.145	1.0700	.7929	.9937
	2	.1460	.2050			3.4264	.2071	.9902
7	1	.9410	.8700	.138	.140	1.0136	.8589	.9939
	2	.0590	.1300			5.5650	.1411	.9906

ERROR ON Y(1)= ABS(YE(1)-Y(1)/DATA POINTS= .0066

ERROR ON P= ABS(PE-P)/DATA POINTS= .002

TABLE 4.17. Bubble T Results for Methanol(1)-2-Butanone(2)
System Using UNIQUAC(15)

PRESSURE= 1.000 ATM

DATA	COMP	GIVEN			CALCULATED			
		X	YE	TE	T	GAMA	FHI	Y

1	1	.0760	.1930	348.45	343.96	3.0176	.9845	.2905
	2	.9240	.8070			1.0130	.9663	.7095
2	1	.1470	.3080	345.35	340.73	2.3763	.9836	.3923
	2	.8530	.6920			1.0446	.9657	.6077
3	1	.1970	.3770	343.85	339.45	2.0658	.9833	.4355
	2	.8030	.6230			1.0759	.9654	.5645
4	1	.2650	.4530	341.95	338.31	1.7620	.9830	.4783
	2	.7350	.5470			1.1289	.9652	.5217
5	1	.3560	.5280	340.65	337.33	1.4897	.9827	.5231
	2	.6440	.4720			1.2175	.9651	.4769
6	1	.4980	.6220	339.05	336.41	1.2375	.9823	.5868
	2	.5020	.3780			1.3965	.9651	.4132
7	1	.6220	.6950	338.25	336.01	1.1136	.9821	.6494
	2	.3780	.3050			1.5957	.9653	.3506
8	1	.7470	.7770	337.55	336.00	1.0429	.9820	.7300
	2	.2530	.2230			1.8377	.9657	.2700
9	1	.8290	.8320	337.45	336.25	1.0172	.9819	.7982
	2	.1710	.1680			2.0156	.9662	.2018
10	1	.8410	.8420	337.45	336.31	1.0146	.9819	.8095
	2	.1590	.1580			2.0424	.9663	.1905
11	1	.8730	.8690	337.45	336.49	1.0088	.9820	.8415
	2	.1270	.1310			2.1146	.9666	.1535
12	1	.9360	.9260	337.55	336.99	1.0019	.9821	.9134
	2	.0640	.0740			2.2556	.9674	.0866

ERROR ON Y(1)= ABS(Y(1)-YE(1))/DATA POINTS= .0420

ERROR ON TEMPERATURE= ABS(T-TE)/DATA POINTS= 2.56

TABLE 4.18. Bubble T Results for Methanol(1)-2-Butanone(2)
System Using UNIFAC(15)

PRESSURE= 1.000 ATM

DATA	COMP	GIVEN			CALCULATED			
		X	YE	TE	T	GAMA	FHI	Y

1	1	.0760	.1930	348.45	348.31	1.7110	.9856	.1929
	2	.9240	.8070			1.0032	.9673	.8071
2	1	.1470	.3080	345.35	345.42	1.5975	.9846	.3139
	2	.8530	.6920			1.0125	.9667	.6861
3	1	.1970	.3770	343.85	343.88	1.5241	.9841	.3792
	2	.8030	.6230			1.0229	.9665	.6208
4	1	.2650	.4530	341.95	342.22	1.4334	.9836	.4513
	2	.7350	.5470			1.0426	.9662	.5487
5	1	.3560	.5280	340.65	340.58	1.3279	.9831	.5232
	2	.6440	.4720			1.0800	.9661	.4718
6	1	.4980	.6220	339.05	338.88	1.1966	.9326	.6242
	2	.5020	.3780			1.1688	.9660	.3758
7	1	.6220	.6950	338.25	337.94	1.1114	.9823	.6986
	2	.3780	.3050			1.2853	.9661	.3014
8	1	.7470	.7770	337.55	337.38	1.0505	.9821	.7762
	2	.2530	.2230			1.4537	.9664	.2238
9	1	.8290	.8320	337.45	337.23	1.0234	.9821	.8342
	2	.1710	.1680			1.6023	.9667	.1658
10	1	.8410	.8420	337.45	337.22	1.0203	.9821	.8435
	2	.1590	.1580			1.6273	.9668	.1565
11	1	.8730	.8690	337.45	337.23	1.0131	.9821	.8695
	2	.1270	.1310			1.6983	.9670	.1305
12	1	.9360	.9260	337.55	337.35	1.0034	.9822	.9277
	2	.0640	.0740			1.8601	.9677	.0723

ERROR ON Y(1)= ABS(Y(1)-YE(1))/DATA POINTS= .0019

ERROR ON TEMPERATURE= ABS(T-TE)/DATA POINTS= .17

TABLE 4.19. Dew T Results for Ethanol(1)-Water(2) System
Using UNIQUAC(15)

PRESSURE= 1.000 ATM

DATA	COMP	GIVEN			CALCULATED			
		Y	XE	TE	T	GAMA	FHI	X
1	1	.1700	.0190	358.65	368.46	4.8592	.9829	.0189
	2	.8300	.9810			1.0011	.9911	.9811
2	1	.3891	.0721	362.15	361.41	3.6071	.9812	.0745
	2	.6109	.9279			1.0163	.9909	.9255
3	1	.4375	.0966	359.85	359.69	3.1849	.9809	.1010
	2	.5625	.9034			1.0289	.9909	.8990
4	1	.4704	.1238	358.45	358.51	2.8553	.9806	.1265
	2	.5296	.8762			1.0437	.9909	.8735
5	1	.5089	.1661	357.25	357.14	2.4227	.9803	.1697
	2	.4911	.8339			1.0743	.9909	.8303
6	1	.5445	.2337	355.85	355.92	2.0071	.9801	.2293
	2	.4555	.7663			1.1264	.9909	.7707
7	1	.5580	.2608	355.45	355.49	1.8570	.9800	.2582
	2	.4420	.7392			1.1552	.9909	.7418
8	1	.5826	.3273	354.65	354.75	1.6158	.9798	.3185
	2	.4174	.6727			1.2226	.9910	.6815
9	1	.6122	.3965	353.85	353.99	1.4056	.9797	.3959
	2	.3878	.6035			1.3215	.9910	.6041
10	1	.6564	.5079	352.95	353.10	1.2203	.9795	.5060
	2	.3436	.4921			1.4841	.9911	.4940
11	1	.6599	.5198	352.85	353.04	1.2088	.9795	.5146
	2	.3401	.4802			1.4988	.9911	.4854
12	1	.6841	.5732	352.45	352.67	1.1529	.9794	.5674
	2	.3159	.4268			1.5853	.9912	.4326
13	1	.7385	.6763	351.89	352.06	1.0754	.9794	.6721
	2	.2615	.3237			1.7754	.9914	.3279
14	1	.7815	.7472	351.56	351.75	1.0428	.9794	.7425
	2	.2185	.2528			1.9129	.9916	.2575
15	1	.8943	.8943	351.30	351.43	1.0064	.9801	.8920
	2	.1057	.1057			2.2362	.9924	.1080

ERROR ON X(1)= ABS(X(1)-XE(1))/DATA POINTS= .0036

ERROR ON T= ABS(TE-T)/DATA POINTS= .18

TABLE 4.20. Dew T Results for Ethanol(1)-Water(2) System
Using UNIFAC(15)

PRESSURE=1. ATM

DATA	COMP	GIVEN			CALCULATED			
		Y	XE	TE	T	GAMA	FHI	X
1	1	.1700	.0190	368.65	368.37	5.9400	.9829	.0155
	2	.8300	.9810			1.0010	.9911	.9845
2	1	.3891	.0721	362.15	361.15	4.1199	.9812	.0659
	2	.6109	.9279			1.0168	.9909	.9341
3	1	.4375	.0966	359.85	359.40	3.5155	.9808	.0925
	2	.5625	.9034			1.0310	.9909	.9075
4	1	.4704	.1238	358.45	358.19	3.0337	.9806	.1204
	2	.5296	.8762			1.0495	.9909	.8796
5	1	.5089	.1661	357.25	356.81	2.4300	.9803	.1712
	2	.4911	.8339			1.0901	.9909	.8288
6	1	.5445	.2337	355.85	355.63	1.9223	.9800	.2421
	2	.4555	.7663			1.1587	.9909	.7579
7	1	.5580	.2608	355.45	355.21	1.7640	.9799	.2746
	2	.4420	.7392			1.1941	.9909	.7254
8	1	.5826	.3273	354.65	354.53	1.5466	.9798	.3355
	2	.4174	.6727			1.2652	.9910	.6645
9	1	.6122	.3965	353.85	353.82	1.3737	.9796	.4078
	2	.3878	.6035			1.3571	.9910	.5922
10	1	.6564	.5079	352.95	352.97	1.2213	.9795	.5081
	2	.3436	.4921			1.4983	.9911	.4919
11	1	.6599	.5198	352.85	352.91	1.2129	.9795	.5155
	2	.3401	.4802			1.5092	.9911	.4845
12	1	.6841	.5732	352.45	352.54	1.1625	.9794	.5654
	2	.3159	.4268			1.5865	.9912	.4346
13	1	.7385	.6763	351.89	351.91	1.0900	.9793	.6670
	2	.2615	.3237			1.7588	.9914	.3330
14	1	.7815	.7472	351.56	351.57	1.0555	.9794	.7385
	2	.2185	.2528			1.8979	.9916	.2615
15	1	.8943	.8943	351.30	351.25	1.0101	.9801	.8948
	2	.1057	.1057			2.3128	.9924	.1052

ERROR ON X(1)= ABS(X(1)-XE(1))/DATA POINTS= .0063

ERROR ON T= ABS(TE-T)/DATA POINTS= .22

TABLE 4.21. Bubble T Results for Methanol(1)-Water(2)
System Using UNIQUAC(15)

PRESSURE= 1.000 ATM

DATA	COMP	GIVEN				CALCULATED		
		X	YE	TE	T	GAMA	FHI	Y
1	1	.0293	.1831	358.40	368.18	2.2128	.9865	.1873
	2	.9707	.8159			1.0010	.9911	.8127
2	1	.0346	.2107	367.65	367.42	2.1886	.9864	.2136
	2	.9654	.7893			1.0013	.9910	.7364
3	1	.0406	.2363	366.85	366.60	2.1618	.9863	.2413
	2	.9594	.7637			1.0018	.9910	.7587
4	1	.0422	.2652	365.95	366.39	2.1547	.9862	.2483
	2	.9578	.7348			1.0020	.9910	.7517
5	1	.0577	.2978	364.95	364.49	2.0885	.9860	.3098
	2	.9423	.7022			1.0037	.9909	.6902
6	1	.0644	.3265	364.05	363.74	2.0610	.9859	.3331
	2	.9356	.6735			1.0046	.9908	.6669
7	1	.0737	.3608	363.15	362.76	2.0240	.9857	.3627
	2	.9263	.6392			1.0060	.9908	.6373
8	1	.0838	.3861	362.25	361.77	1.9852	.9856	.3918
	2	.9162	.6139			1.0077	.9907	.6082
9	1	.0948	.4142	362.35	360.78	1.9445	.9855	.4202
	2	.9052	.5858			1.0098	.9907	.5793
10	1	.2801	.6621	351.95	350.94	1.4578	.9842	.6661
	2	.7199	.3379			1.0792	.9903	.3339
11	1	.3004	.6882	350.75	350.29	1.4216	.9841	.6808
	2	.6996	.3118			1.0904	.9903	.3192
12	1	.3212	.6882	350.75	349.67	1.3871	.9840	.6947
	2	.6788	.3118			1.1027	.9902	.3053
13	1	.3435	.7002	350.05	349.04	1.3528	.9839	.7087
	2	.6565	.2998			1.1167	.9902	.2913
14	1	.3564	.7178	349.35	348.44	1.3202	.9839	.7220
	2	.6336	.2822			1.1319	.9902	.2780
15	1	.3909	.7274	348.85	347.84	1.2881	.9838	.7354
	2	.6091	.2726			1.1491	.9902	.2646
16	1	.4141	.7428	348.25	347.30	1.2601	.9837	.7475
	2	.5859	.2572			1.1664	.9902	.2525
17	1	.4391	.7597	347.75	346.74	1.2324	.9837	.7598
	2	.5609	.2403			1.1860	.9902	.2402
18	1	.4637	.7668	347.15	346.23	1.2073	.9836	.7714
	2	.5363	.2332			1.2064	.9901	.2286
19	1	.8457	.9360	340.35	339.88	1.0129	.9839	.9311
	2	.1543	.0640			1.6634	.9905	.0689
20	1	.8867	.9632	339.75	339.30	1.0058	.9844	.9487
	2	.1133	.0368			1.7298	.9907	.0513
21	1	.9293	.9771	338.85	338.73	1.0026	.9856	.9675
	2	.0707	.0229			1.8029	.9914	.0325

ERROR ON Y(1)= ABS(Y(1)-YE(1))/DATA POINTS= .0066

ERROR ON TEMPERATURE= ABS(T-TE)/DATA POINTS= .65

TABLE 4.22. Bubble T Results for Methanol(1)-Water(2)
System Using UNIFAC(15)

PRESSURE= 1.000 ATM

DATA	COMP	GIVEN				CALCULATED		
		X	YE	TE	T	GAMA	FHI	Y
1	1	.0293	.1831	368.40	368.38	2.1258	.9865	.1811
	2	.9707	.8169			1.0011	.9911	.8189
2	1	.0346	.2107	367.65	367.66	2.0979	.9864	.2063
	2	.9654	.7893			1.0016	.9910	.7937
3	1	.0406	.2363	366.85	366.89	2.0672	.9863	.2329
	2	.9594	.7637			1.0021	.9910	.7671
4	1	.0422	.2652	365.95	366.69	2.0592	.9863	.2396
	2	.9578	.7348			1.0023	.9910	.7604
5	1	.0577	.2978	364.95	364.91	1.9850	.9860	.2984
	2	.9423	.7022			1.0042	.9909	.7016
6	1	.0644	.3265	364.05	364.21	1.9547	.9859	.3207
	2	.9356	.6735			1.0052	.9909	.6793
7	1	.0737	.3608	363.15	363.30	1.9145	.9858	.3491
	2	.9263	.6392			1.0068	.9908	.6509
8	1	.0838	.3861	362.25	362.38	1.8729	.9857	.3770
	2	.9162	.6139			1.0086	.9908	.6230
9	1	.0948	.4142	362.35	361.46	1.8299	.9856	.4043
	2	.9052	.5858			1.0109	.9907	.5957
10	1	.2801	.6621	351.95	352.14	1.3633	.9843	.6496
	2	.7199	.3379			1.0788	.9903	.3504
11	1	.3004	.6882	350.75	351.49	1.3319	.9842	.6652
	2	.6996	.3118			1.0891	.9903	.3348
12	1	.3212	.6882	350.75	350.85	1.3023	.9842	.6803
	2	.6788	.3118			1.1000	.9903	.3197
13	1	.3435	.7002	350.05	350.21	1.2733	.9841	.6954
	2	.6565	.2998			1.1123	.9903	.3046
14	1	.3664	.7178	349.35	349.59	1.2461	.9840	.7101
	2	.6336	.2822			1.1255	.9903	.2899
15	1	.3909	.7274	348.85	348.96	1.2197	.9839	.7250
	2	.6091	.2726			1.1401	.9902	.2750
16	1	.4141	.7428	348.25	348.39	1.1969	.9839	.7384
	2	.5859	.2572			1.1545	.9902	.2616
17	1	.4391	.7597	347.75	347.80	1.1746	.9838	.7522
	2	.5609	.2403			1.1796	.9902	.2478
18	1	.4637	.7668	347.15	347.24	1.1547	.9838	.7653
	2	.5363	.2332			1.1870	.9902	.2347
19	1	.8457	.9360	340.35	340.15	1.0088	.9841	.9369
	2	.1543	.0640			1.5043	.9906	.0631
20	1	.8867	.9632	339.75	339.51	1.0046	.9847	.9538
	2	.1133	.0368			1.5448	.9909	.0462
21	1	.9293	.9771	338.85	338.87	1.0017	.9861	.9712
	2	.0707	.0229			1.5882	.9916	.0288

ERROR ON Y(1)= ABS(Y(1)-YE(1))/DATA POINTS= .0076

ERROR ON TEMPERATURE= ABS(T-TE)/DATA POINTS= .21

TABLE 4.23. Bubble T Results for Acetone(1)-Methanol(2)-
Water(3) System Using UNIQUAC(16)

PRESSURE= 1.000 ATM

DATA	COMP	GIVEN				CALCULATED		
		X	YE	TE	T	GAMA	FHI	Y
1	1	.2000	.6000	337.95	336.51	2.3595	.9743	.5911
	2	.2000	.2300			1.2134	.9827	.2318
	3	.6000	.1700			1.2780	.9911	.1770
2	1	.2000	.4500	337.25	335.79	1.8879	.9747	.4622
	2	.4000	.4100			1.0895	.9828	.4047
	3	.4000	.1400			1.4892	.9909	.1331
3	1	.2000	.3700	335.25	334.27	1.6405	.9758	.3822
	2	.6000	.5600			1.0370	.9833	.5438
	3	.2000	.0700			1.7750	.9911	.0740
4	1	.4000	.6800	333.65	333.34	1.4767	.9740	.6690
	2	.2000	.1900			1.1466	.9826	.1933
	3	.4000	.1300			1.7238	.9914	.1377
5	1	.4000	.5800	332.35	331.86	1.3223	.9752	.5701
	2	.4000	.3500			1.1123	.9832	.3531
	3	.2000	.0700			2.0602	.9915	.0768
6	1	.6000	.7400	331.05	330.94	1.1434	.9746	.7213
	2	.2000	.1800			1.2430	.9831	.1901
	3	.2000	.0800			2.4804	.9919	.0886

ERROR ON Y(1)= ABS(Y(1)-YE(1))/DATA POINTS= .0121
 ERROR ON Y(2)= ABS(Y(2)-YE(2))/DATA POINTS= .0066
 ERROR ON Y(3)= ABS(Y(3)-YE(3))/DATA POINTS= .0068
 ERROR ON TEMPERATURE= ABS(T-TE)/DATA POINTS= .80

TABLE 4.24. Bubble T Results for Acetone(1)-Methanol(2)-
Water(3) System Using UNIFAC(16)

PRESSURE= 1.000 ATM

DATA	COMP	GIVEN				CALCULATED		
		X	YE	TE	T	GAMA	FHI	Y
1	1	.2000	.6000	337.95	339.86	2.0370	.9748	.5562
	2	.2000	.2300			1.0491	.9830	.2281
	3	.6000	.1700			1.2789	.9911	.2057
2	1	.2000	.4500	337.25	338.42	1.6212	.9751	.4309
	2	.4000	.4100			1.0388	.9830	.4275
	3	.4000	.1400			1.4070	.9909	.1416
3	1	.2000	.3700	335.25	335.71	1.4723	.9764	.3589
	2	.6000	.5600			1.0341	.9837	.5739
	3	.2000	.0700			1.5073	.9912	.0671
4	1	.4000	.6800	333.65	335.15	1.4252	.9743	.6841
	2	.2000	.1900			.9682	.9829	.1753
	3	.4000	.1300			1.6195	.9915	.1406
5	1	.4000	.5800	332.35	333.11	1.2830	.9760	.5756
	2	.4000	.3500			1.0730	.9838	.3580
	3	.2000	.0700			1.6801	.9918	.0664
6	1	.6000	.7400	331.05	331.68	1.1733	.9753	.7543
	2	.2000	.1800			1.0722	.9836	.1689
	3	.2000	.0800			2.0796	.9923	.0768

ERROR ON Y(1)= ABS(Y(1)-YE(1))/DATA POINTS= .0144
 ERROR ON Y(2)= ABS(Y(2)-YE(2))/DATA POINTS= .0112
 ERROR ON Y(3)= ABS(Y(3)-YE(3))/DATA POINTS= .0096
 ERROR ON TEMPERATURE= ABS(T-TE)/DATA POINTS= 1.07

TABLE 4.25. Dew T Results for 2-Butanone(1)-n-Heptane(2)
-Toluene(3) System Using UNIQUAC(17)

PRESSURE= 1.000 ATM

DATA	COMP	GIVEN				CALCULATED		
		Y	XE	TE	T	GAMA	FHI	X
1	1	.8380	.8560	351.15	351.72	1.0177	.9875	.8580
	2	.1570	.1270			2.4245	.9808	.1212
	3	.0050	.0170			1.2648	.9811	.0108
2	1	.7630	.7380	351.15	351.35	1.0546	.9735	.7603
	2	.2190	.2170			2.0470	.9592	.1982
	3	.0180	.0450			1.1786	.9655	.0415
3	1	.7620	.7430	351.15	351.17	1.0560	.9771	.7656
	2	.2270	.2250			2.0377	.9646	.2088
	3	.0110	.0320			1.1790	.9694	.0256
4	1	.7160	.6580	351.00	351.16	1.1052	.9783	.6883
	2	.2740	.3140			1.7907	.9662	.2874
	3	.0100	.0280			1.1299	.9707	.0243
5	1	.9250	.9350	352.05	352.73	1.0027	.9914	.9463
	2	.0710	.0430			2.8221	.9872	.0459
	3	.0040	.0220			1.3538	.9857	.0078
6	1	.7510	.7040	351.97	352.07	1.0629	.9708	.7243
	2	.2120	.2060			1.9945	.9552	.1916
	3	.0370	.0930			1.1618	.9625	.0841
7	1	.6850	.5880	351.97	351.72	1.1485	.9723	.6188
	2	.2900	.3450			1.6530	.9570	.3204
	3	.0250	.0660			1.1006	.9640	.0608
8	1	.9860	.9720	352.85	353.29	1.0001	.9794	.9820
	2	.0060	.0040			3.0611	.9693	.0034
	3	.0080	.0240			1.4056	.9726	.0146
9	1	.7320	.6580	353.15	353.23	1.0768	.9699	.6719
	2	.2030	.1960			1.9197	.9538	.1833
	3	.0650	.1460			1.1387	.9616	.1448
10	1	.6450	.5140	353.07	352.84	1.2193	.9708	.5295
	2	.3100	.3790			1.5018	.9545	.3626
	3	.0450	.1070			1.0726	.9622	.1079
11	1	.7000	.5780	355.40	355.27	1.1013	.9698	.5904
	2	.1860	.1730			1.8201	.9536	.1659
	3	.1140	.2490			1.1072	.9614	.2437
12	1	.5790	.3940	355.33	355.03	1.3561	.9704	.3998
	2	.3420	.4310			1.3300	.9537	.4208
	3	.0790	.1750			1.0506	.9618	.1795
13	1	.6610	.4990	357.65	357.45	1.1326	.9700	.5081
	2	.1720	.1540			1.7258	.9539	.1511
	3	.1670	.3470			1.0792	.9617	.3407
14	1	.6540	.4820	358.05	357.96	1.1375	.9701	.4930
	2	.1660	.1490			1.7152	.9540	.1445
	3	.1800	.3690			1.0750	.9618	.3625
15	1	.5870	.4030	358.00	357.70	1.2407	.9702	.4089
	2	.2530	.2630			1.4810	.9538	.2570
	3	.1600	.3340			1.0454	.9618	.3342
16	1	.5040	.2820	358.00	357.63	1.5217	.9707	.2870
	2	.3810	.4770			1.2144	.9539	.4731
	3	.1150	.2410			1.0495	.9620	.2399
17	1	.4440	.1910	358.00	357.84	1.9714	.9723	.1943
	2	.5060	.7050			1.0722	.9557	.7034
	3	.0500	.1040			1.1183	.9635	.0974
18	1	.5250	.3130	360.30	359.91	1.3211	.9707	.3220
	2	.2710	.2770			1.3813	.9543	.2757
	3	.2040	.4050			1.0308	.9622	.4022
19	1	.4350	.2080	360.27	360.04	1.6600	.9712	.2117
	2	.4180	.5060			1.1542	.9544	.5071
	3	.1470	.2860			1.0583	.9625	.2812
20	1	.3920	.1480	360.30	360.13	1.9854	.9719	.1592
	2	.5160	.6750			1.0697	.9550	.6740
	3	.0920	.1770			1.1134	.9631	.1669

...Continued

TABLE 4.25 Continued.

21	1	.5540	.3500	362.65	362.49	1.2073	.9709	.3514
	2	.1400	.1130			1.5835	.9552	.1150
	3	.2960	.5370			1.0381	.9628	.5336
22	1	.4550	.2410	362.67	362.42	1.4062	.9712	.2440
	2	.2900	.2890			1.3084	.9549	.2888
	3	.2550	.4700			1.0237	.9628	.4672
23	1	.3350	.1180	362.77	362.60	1.9841	.9720	.1268
	2	.5220	.6340			1.0708	.9552	.6320
	3	.1430	.2480			1.1059	.9633	.2412
24	1	.5030	.2860	364.88	364.73	1.2576	.9714	.2825
	2	.1440	.1110			1.5101	.9558	.1161
	3	.3530	.6030			1.0239	.9633	.6014
25	1	.3880	.1830	364.90	364.70	1.4823	.9717	.1851
	2	.3110	.3010			1.2591	.9555	.3009
	3	.3010	.5160			1.0225	.9634	.5140
26	1	.2830	.0990	364.87	364.82	1.9652	.9724	.1016
	2	.5220	.5900			1.0758	.9556	.5890
	3	.1950	.3110			1.0965	.9637	.3094
27	1	.4060	.1980	368.25	368.20	1.3312	.9722	.1957
	2	.1490	.1120			1.4322	.9567	.1145
	3	.4450	.6900			1.0113	.9642	.6898
28	1	.3500	.1550	368.25	368.34	1.4177	.9724	.1578
	2	.2240	.1860			1.3337	.9567	.1841
	3	.4260	.6590			1.0105	.9642	.6580
29	1	.2840	.1090	368.20	368.07	1.5886	.9725	.1152
	2	.3450	.3160			1.2074	.9564	.3157
	3	.3710	.5750			1.0259	.9642	.5692
30	1	.1940	.0610	368.27	368.21	1.9726	.9731	.0632
	2	.5330	.5420			1.0778	.9564	.5442
	3	.2730	.3970			1.0900	.9644	.3926
31	1	.1970	.0730	373.30	373.24	1.5212	.9735	.0726
	2	.2470	.1840			1.2773	.9580	.1848
	3	.5560	.7430			1.0095	.9654	.7426
32	1	.1240	.0380	373.05	372.88	1.7199	.9737	.0408
	2	.3990	.3330			1.1619	.9577	.3314
	3	.4770	.6290			1.0354	.9654	.6278

ERROR ON X (1) = ABS(X (1)-XE (1))/DATA POINTS = .0093

ERROR ON X (2) = ABS(X (2)-XE (2))/DATA POINTS = .0063

ERROR ON X (3) = ABS(X (3)-XE (3))/DATA POINTS = .0042

ERROR ON T = ABS(TE-T)/DATA POINTS = .21

TABLE 4.26. Dew T Results for 2-Butanone(1)-n-Heptane(2)
-Toluene(3) System Using UNIFAC(17)

PRESSURE= 1.000 ATM

DATA	COMP	GIVEN			CALCULATED			
		Y	XE	TE	T	GAMA	FHI	X
1	1	.8380	.8560	351.15	351.22	1.0187	.9875	.8805
	2	.1570	.1270			2.8078	.9807	.1064
	3	.0050	.0170			1.0565	.9811	.0131
2	1	.7630	.7380	351.15	350.89	1.0649	.9734	.7638
	2	.2190	.2170			2.2318	.9591	.1846
	3	.0180	.0450			.9606	.9654	.0517
3	1	.7520	.7430	351.15	350.55	1.0640	.9770	.7744
	2	.2270	.2250			2.2485	.9644	.1931
	3	.0110	.0320			.9478	.9693	.0325
4	1	.7160	.6580	351.00	350.41	1.1216	.9782	.6941
	2	.2740	.3140			1.9242	.9660	.2740
	3	.0100	.0280			.8831	.9705	.0319
5	1	.9250	.9350	352.05	352.52	1.0029	.9914	.9521
	2	.0710	.0430			3.3508	.9871	.0389
	3	.0040	.0220			1.1835	.9857	.0090
6	1	.7510	.7040	351.97	351.94	1.0782	.9708	.7169
	2	.2120	.2060			2.1075	.9551	.1821
	3	.0370	.0900			.9719	.9625	.1010
7	1	.6850	.5880	351.97	351.30	1.1762	.9722	.6122
	2	.2900	.3460			1.7253	.9568	.3112
	3	.0250	.0660			.8862	.9638	.0766
8	1	.9860	.9720	352.85	353.33	1.0002	.9794	.9809
	2	.0060	.0040			3.6390	.9693	.0029
	3	.0080	.0240			1.2631	.9726	.0162
9	1	.7320	.6580	353.15	353.47	1.0935	.9700	.6568
	2	.2030	.1960			1.9711	.9539	.1772
	3	.0650	.1460			.9843	.9616	.1561
10	1	.6450	.5140	353.07	352.77	1.2477	.9708	.5185
	2	.3100	.3790			1.5466	.9545	.3529
	3	.0450	.1070			.9016	.9622	.1286
11	1	.7000	.5780	355.40	355.96	1.1091	.9699	.5744
	2	.1860	.1730			1.8262	.9538	.1618
	3	.1140	.2490			.9998	.9616	.2638
12	1	.5790	.3940	355.33	355.33	1.3478	.9705	.3936
	2	.3420	.4310			1.3778	.9538	.4024
	3	.0790	.1750			.9379	.9618	.1990
13	1	.6510	.4990	357.65	358.40	1.1222	.9702	.4987
	2	.1720	.1540			1.7197	.9542	.1473
	3	.1670	.3470			1.0070	.9620	.3540
14	1	.6540	.4820	358.05	358.95	1.1225	.9703	.4853
	2	.1660	.1490			1.7073	.9544	.1408
	3	.1800	.3690			1.0091	.9621	.3739
15	1	.5870	.4030	358.00	358.56	1.2066	.9704	.4100
	2	.2530	.2630			1.5150	.9541	.2446
	3	.1600	.3340			.9835	.9620	.3454
16	1	.5040	.2820	358.00	358.04	1.4425	.9708	.2991
	2	.3810	.4770			1.2699	.9541	.4467
	3	.1150	.2410			.9771	.9622	.2542
17	1	.4440	.1910	358.00	357.67	1.9725	.9722	.1951
	2	.5060	.7050			1.0931	.9557	.6984
	3	.0500	.1040			1.0287	.9635	.1064
18	1	.5250	.3180	360.30	360.79	1.2422	.9709	.3339
	2	.2710	.2770			1.4275	.9546	.2599
	3	.2040	.4050			.9923	.9625	.4062
19	1	.4350	.2080	360.27	360.40	1.5175	.9713	.2291
	2	.4180	.5060			1.2065	.9545	.4798
	3	.1470	.2860			1.0103	.9626	.2911
20	1	.3920	.1480	360.30	360.12	1.8787	.9719	.1682
	2	.5160	.6750			1.0993	.9550	.6560
	3	.0920	.1770			1.0574	.9631	.1757

...Continued.

TABLE 4.26. Continued.

21	1	.5643	.3500	362.65	363.60	1.1425	.9712	.3599
	2	.1400	.1130			1.5872	.9556	.1110
	3	.2960	.5370			1.0108	.9631	.5291
22	1	.4550	.2410	362.67	363.21	1.2738	.9714	.2633
	2	.2900	.2890			1.3615	.9552	.2711
	3	.2550	.4700			1.0020	.9630	.4655
23	1	.3350	.1180	362.77	362.65	1.7917	.9721	.1402
	2	.5220	.6340			1.1039	.9552	.6122
	3	.1430	.2480			1.0757	.9633	.2476
24	1	.5030	.2860	364.88	365.77	1.1612	.9717	.2972
	2	.1440	.1110			1.5292	.9561	.1112
	3	.3530	.6030			1.0080	.9636	.5915
25	1	.3880	.1830	364.90	365.34	1.3018	.9719	.2070
	2	.3110	.3010			1.3141	.9557	.2830
	3	.3010	.5150			1.0104	.9635	.5100
26	1	.2930	.0990	364.87	364.85	1.7140	.9724	.1163
	2	.5220	.5900			1.1099	.9556	.5704
	3	.1750	.3110			1.0822	.9637	.3132
27	1	.4060	.1980	368.25	369.04	1.1859	.9724	.2147
	2	.1490	.1120			1.4698	.9570	.1090
	3	.4450	.6900			1.0054	.9644	.6763
28	1	.3500	.1550	368.25	368.99	1.2322	.9725	.1734
	2	.2240	.1860			1.3847	.9569	.1741
	3	.4260	.6590			1.0068	.9644	.6475
29	1	.2840	.1090	368.20	368.41	1.3388	.9726	.1354
	2	.3450	.3160			1.2615	.9565	.2992
	3	.3710	.5750			1.0222	.9643	.5654
30	1	.1940	.0610	368.27	368.38	1.6554	.9730	.0755
	2	.5330	.5420			1.1035	.9564	.5310
	3	.2730	.3970			1.0918	.9644	.3935
31	1	.1970	.0730	373.30	373.46	1.2635	.9735	.0869
	2	.2470	.1840			1.3355	.9580	.1757
	3	.5560	.7430			1.0101	.9654	.7374
32	1	.1240	.0380	373.05	372.72	1.3853	.9737	.0509
	2	.3990	.3330			1.2078	.9577	.3201
	3	.4770	.6290			1.0383	.9653	.6290

ERROR ON X(1) = ABS(X(1)-XE(1))/DATA POINTS = .0156

ERROR ON X(2) = ABS(X(2)-XE(2))/DATA POINTS = .0172

ERROR ON X(3) = ABS(X(3)-XE(3))/DATA POINTS = .0082

ERROR ON T = ABS(TE-T)/DATA POINTS = .41

TABLE 4.27. Bubble P Results for Methnol(1)-Carbontetra-
chloride(2)-Benzene(3) System Using UNIQUAC(18)

TEMPERATURE= 328.15 K

DATA	COMP	GIVEN				CALCULATED		
		X	YE	PE	P	GAMA	Y	FHI
1	1	.1880	.5152	.875	.887	3.6159	.5228	.9531
	2	.1960	.1387			1.2361	.1362	.9690
	3	.6160	.3461			1.1210	.3409	.9698
2	1	.1983	.5130	.908	.920	3.5335	.5197	.9826
	2	.3961	.2624			1.2013	.2582	.9679
	3	.4056	.2246			1.1495	.2221	.9688
3	1	.1982	.5109	.907	.920	3.5350	.5197	.9826
	2	.3963	.2628			1.2012	.2583	.9679
	3	.4055	.2263			1.1494	.2221	.9688
4	1	.1945	.5068	.930	.943	3.6717	.5171	.9824
	2	.5922	.3733			1.1682	.3665	.9674
	3	.2133	.1199			1.1728	.1164	.9683
5	1	.3590	.5397	.936	.950	2.1228	.5475	.9820
	2	.3230	.2539			1.4695	.2495	.9669
	3	.3180	.2064			1.3826	.2030	.9678
6	1	.5557	.5672	.944	.958	1.4439	.5719	.9818
	2	.2134	.2316			2.0582	.2291	.9667
	3	.2309	.2012			1.8826	.1991	.9677
7	1	.7515	.6209	.925	.942	1.1349	.6179	.9820
	2	.1115	.1925			3.3169	.1960	.9674
	3	.1370	.1866			2.9207	.1862	.9683
8	1	.8433	.6736	.896	.915	1.0562	.6641	.9825
	2	.0814	.1890			4.4463	.1972	.9686
	3	.0753	.1374			3.8486	.1387	.9695
ERROR ON Y(1)= ABS(YE(1)-Y(1)/DATA POINTS=								.0073
ERROR ON Y(2)= ABS(YE(2)-Y(2)/DATA POINTS=								.0046
ERROR ON Y(3)= ABS(YE(3)-Y(3)/DATA POINTS=								.0028
ERROR ON P= ABS(PE-P)/DATA POINTS=								.014

TABLE 4.28 Bubble P Results for Methanol(1)-Carbontetra-
chloride(2)-Benzene(3) System Using UNIFAC(18)

TEMPERATURE= 328.15 K

DATA	COMP	GIVEN				CALCULATED		
		X	YE	PE	P	GAMA	Y	FHI
1	1	.1880	.5152	.875	.575	2.1927	.4857	.9891
	2	.1960	.1387			.8258	.1387	.9798
	3	.6160	.3461			.8100	.3756	.9803
2	1	.1983	.5130	.908	.720	2.9049	.5440	.9864
	2	.3961	.2624			1.1136	.3037	.9750
	3	.4056	.2246			.6212	.1523	.9757
3	1	.1982	.5109	.907	.720	2.9068	.5440	.9864
	2	.3963	.2628			1.1135	.3038	.9750
	3	.4055	.2263			.6211	.1522	.9757
4	1	.1945	.5068	.930	.863	3.5337	.5426	.9842
	2	.5922	.3733			1.1798	.4029	.9709
	3	.2133	.1199			.5038	.0544	.9717
5	1	.3590	.5397	.936	.751	1.6788	.5457	.9859
	2	.3230	.2539			1.5473	.3301	.9740
	3	.3180	.2064			.6733	.1242	.9748
6	1	.5557	.5672	.944	.781	1.2075	.5845	.9853
	2	.2134	.2316			2.3334	.3164	.9732
	3	.2309	.2012			.7691	.0991	.9739
7	1	.7515	.6209	.925	.783	1.0471	.6838	.9853
	2	.1115	.1925			3.5307	.2494	.9737
	3	.1370	.1866			.8758	.0668	.9744
8	1	.8433	.6736	.896	.786	1.0197	.7446	.9855
	2	.0814	.1890			4.2372	.2177	.9744
	3	.0753	.1374			.9050	.0378	.9750
ERROR ON Y(1)= ABS(YE(1)-Y(1)/DATA POINTS=								.0358
ERROR ON Y(2)= ABS(YE(2)-Y(2)/DATA POINTS=								.0448
ERROR ON Y(3)= ABS(YE(3)-Y(3)/DATA POINTS=								.0806
ERROR ON P= ABS(PE-P)/DATA POINTS=								.167

TABLE 4.29. Dew P Results for Methanol(1)-Carbontetra-
chloride(2)-Benzene(3) System Using UNIQUAC(18)

TEMPERATURE= 328.15 K

DATA	COMP	GIVEN			CALCULATED			
		Y	XE	PE	P	GAMA	FHI	X
1	1	.5152	.1880	.875	.877	3.9207	.9833	.1691
	2	.1387	.1960			1.2125	.9693	.2014
	3	.3461	.6160			1.1020	.9701	.6296
2	1	.5130	.1983	.908	.911	3.8485	.9828	.1781
	2	.2624	.3961			1.1759	.9682	.4078
	3	.2246	.4056			1.1287	.9691	.4141
3	1	.5109	.1982	.907	.909	3.9588	.9828	.1719
	2	.2628	.3963			1.1685	.9683	.4097
	3	.2263	.4055			1.1223	.9691	.4183
4	1	.5068	.1945	.930	.929	4.2650	.9827	.1618
	2	.3733	.5922			1.1294	.9678	.6152
	3	.1199	.2133			1.1396	.9687	.2230
5	1	.5397	.3590	.936	.944	2.4646	.9821	.3027
	2	.2539	.3230			1.3605	.9671	.3526
	3	.2064	.3180			1.2886	.9681	.3447
6	1	.5672	.5557	.944	.957	1.5173	.9818	.5242
	2	.2316	.2134			1.9373	.9667	.2291
	3	.2012	.2309			1.7798	.9677	.2467
7	1	.6209	.7515	.925	.940	1.1285	.9820	.7579
	2	.1925	.1115			3.3788	.9675	.1073
	3	.1866	.1370			2.9694	.9684	.1348
8	1	.6736	.8433	.896	.908	1.0490	.9826	.8543
	2	.1890	.0814			4.6303	.9689	.0743
	3	.1374	.0753			3.9912	.9698	.0714

ERROR ON X(1)= ABS(XE(1)-X(1))/DATA POINTS= .0254
 ERROR ON X(2)= ABS(XE(2)-X(2))/DATA POINTS= .0137
 ERROR ON X(3)= ABS(XE(3)-X(3))/DATA POINTS= .0117
 ERROR ON PRESSURE= ABS(PE-P)/DATA POINTS= .007

TABLE 4.30. Dew P Results for Methanol(1)-Carbontetra-
rchloride(2)-Benzene(3) System Using UNIFAC(18)

TEMPERATURE= 328.15 K

DATA	COMP	GIVEN			CALCULATED			
		Y	XE	PE	P	GAMA	FHI	X
1	1	.5152	.1880	.875	.893	4.7821	.9830	.1412
	2	.1387	.1960			1.2196	.9687	.2038
	3	.3461	.6160			1.0784	.9696	.6550
2	1	.5130	.1983	.908	.934	4.9073	.9824	.1430
	2	.2624	.3961			1.1610	.9674	.4227
	3	.2246	.4056			1.1016	.9683	.4343
3	1	.5109	.1982	.907	.930	5.0946	.9824	.1368
	2	.2628	.3963			1.1533	.9675	.4247
	3	.2263	.4055			1.0955	.9684	.4385
4	1	.5068	.1945	.930	.952	6.3555	.9822	.1112
	2	.3733	.5922			1.0879	.9670	.6540
	3	.1199	.2133			1.1085	.9680	.2348
5	1	.5397	.3590	.936	.956	1.3775	.9819	.5487
	2	.2539	.3230			2.1484	.9667	.2261
	3	.2064	.3180			1.9977	.9676	.2252
6	1	.5672	.5557	.944	.948	1.1850	.9820	.6648
	2	.2316	.2134			2.6946	.9671	.1632
	3	.2012	.2309			2.5275	.9680	.1721
7	1	.6209	.7515	.925	.918	1.0770	.9825	.7760
	2	.1925	.1115			3.4139	.9683	.1038
	3	.1866	.1370			3.2548	.9691	.1202
8	1	.6736	.8433	.896	.885	1.0357	.9831	.8442
	2	.1890	.0814			3.9871	.9697	.0842
	3	.1374	.0753			3.8875	.9705	.0715

ERROR ON X(1)= ABS(XE(1)-X(1))/DATA POINTS= .0714
 ERROR ON X(2)= ABS(XE(2)-X(2))/DATA POINTS= .0353
 ERROR ON X(3)= ABS(XE(3)-X(3))/DATA POINTS= .0368
 ERROR ON PRESSURE= ABS(PE-P)/DATA POINTS= .016

TABLE 4.31. VLE Results for Various Alcohol-Aromatic Binary Systems (15)

SYSTEM	TYPE	T(P) K(ATM)	DATA POINTS	AMD(UNIQUAC)		AMD(UNIFAC)		AMD(RAOULT)		
				X(Y)	T(P)	X(Y)	T(P)	X(Y)	T(P)	
METHANOL	TOLUENE	BUBT	1.000	10	.0104	.77	.0049	.24	.1047	9.88
BENZENE	N-BUTANOL	BUBT	1.000	21	.0290	.23	.0047	.34	.0790	6.29
METHANOL	BENZENE	BUBT	1.000	10	.0083	.55	.0156	.76	.1871	10.47
BENZENE	N-PROPANOL	BUBT	1.000	12	.0422	1.21	.0131	1.36	.0926	7.65
ETHANOL	BENZENE	BUBT	1.000	10	.0083	.32	.0067	.49	.1399	9.19
METHANOL	TOLUENE	DEWT	1.000	10	.0430	.55	.0242	.19	.1919	11.28
METHANOL	BENZENE	DEWT	1.000	10	.0140	.29	.0233	.25	.1809	9.81
BENZENE	N-BUTANOL	DEWT	1.000	21	.0338	1.28	.0097	.35	.0852	5.18
ETHANOL	BENZENE	DEWT	1.000	10	.0271	.37	.0195	.47	.1407	9.22
BENZENE	N-BUTANOL	BUBP	293.15	5	.0143	.002	.0138	.002	.1492	.030
BENZENE	N-BUTANOL	BUBP	318.15	9	.0041	.001	.0039	.005	.0429	.058
BENZENE	SEC-BUTANOL	BUBP	298.15	5	.0667	.024	.0123	.002	.0715	.033
BENZENE	TER-BUTANOL	BUBP	298.15	6	.0777	.022	.0171	.001	.0891	.034
METHANOL	BENZENE	BUBP	328.15	9	.0089	.012	.0118	.012	.1693	.279
ETHANOL	BENZENE	BUBP	323.15	11	.0173	.009	.0088	.004	.1474	.127
ETHANOL	TOLUENE	BUBP	308.15	10	.0297	.005	.0198	.003	.1826	.047
ETHANOL	TOLUENE	BUBP	358.15	11	.0171	.037	.0204	.044	.1211	.358
BENZENE	I-PROPANOL	BUBP	298.15	7	.0069	.002	.0066	.002	.1346	.036
BENZENE	N-BUTANOL	DEWP	298.15	5	.1492	.014	.1463	.014	.3892	.074
BENZENE	N-BUTANOL	DEWP	318.15	9	.0232	.005	.0250	.009	.4970	.203
BENZENE	SEC-BUTANOL	DEWP	298.15	5	.1171	.019	.0700	.006	.3723	.078
BENZENE	TER-BUTANOL	DEWP	298.15	6	.1014	.019	.0380	.002	.4361	.095
BENZENE	I-PROPANOL	DEWP	298.15	7	.0127	.001	.0088	.002	.4007	.098
METHANOL	BENZENE	DEWP	328.15	9	.0211	.008	.0419	.009	.3826	.657
ETHANOL	BENZENE	DEWP	323.15	11	.0244	.005	.0117	.003	.5305	.436
BENZENE	N-PROPANOL	DEWP	313.15	10	.0352	.009	.0365	.008	.3848	.175

AMD=AVERAGE ABSOLUTE MEAN DEVIATION

TABLE 4.32 VLE Results for various Alkane-Aromatic Binary Systems (15)

SYSTEM	TYPE	T(P) K(ATM)	DATA POINTS	AMD(UNIQUAC)		AMD(UNIFAC)		AMD(RAOULT)		
				X(Y)	T(P)	X(Y)	T(P)	X(Y)	T(P)	
*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	
N-HEXANE	BENZENE	DEWT	1.000	12	.0057	.10	.0070	.26	.0279	2.19
N-HEXANE	TOLUENE	BUBT	1.000	15	.0055	.23	.0054	.43	.0181	2.37
BENZENE	N-HEPTANE	BUBT	1.000	18	.0080	.50	.0058	.34	.0227	2.27
N-HEPTANE	TOLUENE	BUBT	1.000	17	.0025	.16	.0070	.50	.0167	1.46
224 T.M.P.	TOLUENE	BUBP	373.15	9	.0136	.224	.0040	.015	.0264	.053
BENZENE	N-HEPTANE	DEWT	1.000	18	.0083	.42	.0060	.27	.0260	2.20
N-HEPTANE	TOLUENE	DEWT	1.000	17	.0024	.14	.0067	.44	.0157	1.46
224 T.M.P.	TOLUENE	DEWP	373.15	9	.0140	.021	.0130	.010	.0266	.054

T.M.P.= TRIMETHYL PENTANE

TABLE 4.33. VLE Results for various Alkane-Alcohol Binary Systems (15)

SYSTEM	TYPE	T(P) K(ATM)	DATA POINTS	AMD(UNIQUAC)		AMD(UNIFAC)		AMD(RAOULT)		
				X(Y)	T(P)	X(Y)	T(P)	X(Y)	T(P)	
V-HEXANE	ETHANOL	BUBT	1.000	9	.0046	.45	.0151	.46	.1878	13.92
N-DECANE	N-BUTANOL	BUBP	373.15	19	.0134	.004	.0116	.013	.0301	.094
V-DECANE	N-BUTANOL	DEWP	373.15	19	.0449	.008	.0415	.014	.1500	.118
N-HEPTANE	N-BUTANOL	BUBT	.900	10	.0312	2.09	.0303	1.53	.1479	11.70
ETHANOL	N-HEPTANE	BUBP	323.15	12	.0306	.010	.0256	.010	.1322	.136
METHANOL	N-HEPTANE	BUBT	1.000	7	.0109	.55	.0229	.83	.2047	15.91
N-PROPANOL	N-HEPTANE	BUBT	1.000	9	.0316	1.64	.0292	1.08	.1374	11.48
V-HEXANE	N-PROPANOL	BUBT	1.000	12	.0392	1.72	.0452	1.65	.1465	11.12
METHANOL	N-HEXANE	BUBP	318.15	9	.0150	.020	.0208	.034	.2177	.379
I-PROPANOL	224 T.M.P.	BUBT	1.000	12	.0067	.35	.0485	3.63	.1248	8.65
N-HEPTANE	N-BUTANOL	DEWT	.900	10	.0505	1.15	.0556	.71	.1436	10.22
ETHANOL	N-HEPTANE	DEWP	323.15	12	.0766	.010	.0632	.010	.1933	.143
METHANOL	N-HEPTANE	DEWT	1.000	7	.0836	.14	.2276	.39	.2769	16.35
N-PROPANOL	N-HEPTANE	DEWT	1.000	9	.0656	.83	.0678	.83	.1376	11.48
N-HEXANE	N-PROPANOL	DEWT	1.000	12	.0382	2.11	.0538	1.48	.1406	8.96
METHANOL	N-HEXANE	DEWP	318.15	9	.3134	.008	.1635	.002	.2177	.379
I-PROPANOL	224 T.M.P.	DEWT	1.000	12	.0139	.35	.0649	2.08	.1265	8.37

T.M.P.=TRIMETHYL PENTANE

TABLE 4.34 VLE Results for Alcohol-Water Binary Systems (15)

SYSTEM	TYPE	T(P) K(ATM)	DATA POINTS	AMD(UNIQUAC)		AMD(UNIFAC)		AMD(RAOULT)		
				X(Y)	T(P)	X(Y)	T(P)	X(Y)	T(P)	
N-BUTANOL	WATER	BUBT	1.000	13	.0419	1.51	.0507	1.76	.1875	10.35
N-PROPANOL	WATER	BUBT	1.000	3	.0079	.21	.0142	.46	.1351	11.10
METHANOL	WATER	BUBT	1.000	51	.0114	.70	.0130	.33	.0832	4.62
ETHANOL	WATER	BUBT	1.000	15	.0027	.14	.0058	.31	.1179	7.45
ETHANOL	WATER	DEWT	1.000	15	.0036	.18	.0063	.22	.1012	6.41

TABLE 4.35. VLE Results for Ketone-Alcohol Binary Systems (15)

SYSTEM	TYPE	T(P) K(ATM)	DATA POINTS	AMD(UNIQUAC)		AMD(UNIFAC)		AMD(RAOULT)		
				X(Y)	T(P)	X(Y)	T(P)	X(Y)	T(P)	
ACETONE	ETHANOL	BUBT	1.000	9	.0220	.41	.0265	.69	.0459	3.42
ACETONE	ETHANOL	DEWT	1.000	9	.0226	.32	.0264	.11	.0410	3.29
ACETONE	METHANOL	BUBT	1.000	8	.0169	.51	.0136	.36	.0424	2.70
ACETONE	METHANOL	DEWT	1.000	8	.0173	.46	.0140	.36	.0432	2.66
METHANOL	2-BUTANONE	BUBT	1.000	12	.0420	2.56	.0019	.17	.0527	3.28
METHANOL	2-BUTANONE	DEWT	1.000	12	.0437	1.85	.0021	.18	.0565	3.27

TABLE 4.36. VLE Results for Ternary Systems

SYSTEM	TYPE	T(P) K(ATM)	DATA POINTS	AMD(UNIQUAC) X(Y)	T(P)	AMD(UNIFAC) X(Y)	T(P)	AMD(RAULT) X(Y)	T(P)
ACETONE METHANOL WATER(16)	BU3T	1.000	6	.0121 .0066 .0068	.80	.0144 .0112 .0096	1.07	.0861 .0772 .0290	7.92
ACETONE METHANOL WATER(16)	DEWT	1.000	6	.0263 .0081 .0266	1.00	.0235 .0160 .0293	.75	.0650 .0650 .0619	7.89
2-BUTANONE N-HEPTANE TOLUENE(17)	BU3T	1.000	32	.0069 .0047 .0028	.18	.0172 .0144 .0075	.68	.0583 .0487 .0294	6.47
2-BUTANONE N-HEPTANE TOLUENE(17)	DEWT	1.000	32	.0093 .0063 .0042	.21	.0156 .0172 .0082	.41	.0529 .0537 .0341	5.88
METHANOL CCL4 BENZENE(18)	DEWP	328.15	8	.0254 .0137 .0117	.007	.0714 .0353 .0368	.016	.3232 .2061 .1919	.729
METHANOL CCL4 BENZENE(18)	BU3P	328.15	8	.0073 .0046 .0028	.142	.0358 .0448 .0806	.168	.1967 .1025 .0942	.365
METHANOL CCL4 BENZENE(18)	DEWP	307.83	6	.0404 .0206 .0206	.004	.0968 .0463 .0505	.004	.2798 .2003 .1846	.303
METHANOL CCL4 BENZENE(18)	BU3P	307.83	6	.0071 .0045 .0047	.001	.0157 .0058 .0099	.008	.1771 .0921 .0850	.165
WATER FORMIC ACID ACETIC ACID(19)	BU3T	1.000	67	.0394 .0135 .0271	3.93	.0445 .0291 .0384	6.29	.0196 .0375 .0383	2.23
WATER FORMIC ACID ACETIC ACID(19)	DEWT	1.000	67	.0430 .0127 .0346	3.46	.0555 .0316 .0535	5.52	.0239 .0366 .0491	1.72

TABLE 4.37. VLE Results for Ethanol-Water Systems at
Different Conditions (15)

TYPE	T(P)	DATA POINTS	AMD(UNIQAC)		AMD(UNIFAC)		AMD(RAOULT)	
	K(ATM)		X(Y)	T(P)	X(Y)	T(P)	X(T)	T(P)
DEWT	.066	11	.0141	.43	.0214	.54	.0898	4.37
DEWT	.329	11	.0176	.23	.0219	.25	.0967	4.85
DEWT	.658	11	.0068	.12	.0102	.12	.0982	5.60
DEWT	.929	12	.0029	.15	.0052	.27	.0927	5.04
DEWT	1.000	15	.0036	.18	.0063	.22	.1012	6.41
DEWT	3.402	18	.0061	.33	.0097	.32	.0961	6.76
DEWT	6.805	18	.0407	.64	.0464	1.14	.1024	6.44
DEWT	13.610	18	.0231	1.32	.0302	2.07	.0799	6.96
DEWT	20.410	12	.0313	1.01	.0421	1.82	.0682	7.66
BUBT	.066	11	.0179	.58	.0214	.81	.0766	4.01
BUBT	.329	11	.0112	.36	.0150	.53	.0983	5.25
BUBT	.658	11	.0045	.13	.0070	.24	.1005	5.99
BUBT	.929	12	.0047	.17	.0096	.53	.1425	7.36
BUBT	1.000	15	.0027	.14	.0058	.31	.1179	7.45
BUBT	3.402	18	.0057	.29	.0134	.65	.1185	8.15
BUBT	6.805	18	.0253	1.09	.0365	2.06	.1202	8.22
BUBT	13.610	18	.0171	2.07	.0300	3.51	.0911	7.58
BUBT	20.410	12	.0299	2.56	.0511	4.69	.1002	9.69
BUBP	473.15	5	.0248	.564	.0378	1.490	.0980	4.580
DEWP	473.15	5	.0418	.829	.0522	1.310	.2408	16.682
DEWP	423.15	5	.0374	.485	.0466	.340	.2580	7.318
BUBP	423.15	5	.0223	.370	.0307	.110	.1148	2.378

TABLE 4.38. Bubble T Results for Acetone-Water System at
Various Pressures (15)

P (ATM)	DATA POINTS	AMD(UNIQAC)		AMD(UNIFAC)		AMD(RAOULT)	
		Y	T	Y	T	Y	T
.558	12	.0124	1.06	.0113	.75	.1931	12.73
1.000	13	.0138	.75	.0092	.69	.1641	13.51
3.402	12	.0220	1.18	.0271	1.47	.1837	14.93
6.805	11	.0198	1.42	.0287	2.29	.1659	15.82
13.610	13	.0295	1.93	.0439	3.58	.1547	18.81
17.010	8	.0263	2.24	.0446	3.94	.1571	19.32

TABLE 4.39. VLE Results for Methanol-Water System at
Various Pressures (15)

TYPE	P (ATM)	DATA POINTS	AMD(UNIQAC)		AMD(UNIFAC)		AMD(RAOULT)	
			X(Y)	T	X(Y)	T	X(Y)	T
BUBT	.967	8	.0347	1.84	.0418	2.47	.0980	6.02
BUBT	1.000	51	.0114	.70	.0130	.33	.6832	4.62
BUBT	3.000	22	.0110	.47	.0058	.94	.0529	4.58
BUBT	5.000	22	.0128	.51	.0087	.80	.0480	4.89
BUBT	8.000	22	.0122	.69	.0085	.53	.0469	4.93
BUBT	11.200	22	.0126	.62	.0094	.42	.0458	4.91
DEWT	11.200	22	.0159	.44	.0122	.71	.0477	5.25

TABLE 4.40 Bubble T Results for Acetone(1)-Water(2) System
Using UNIQUAC at 13.610 atm(15)

PRESSURE= 13.610 ATM

DATA	COMP	GIVEN			CALCULATED			
		X	YE	TE	T	GAMA	FHI	Y
1	1	.0200	.2890	450.35	455.60	8.7698	.8617	.2312
	2	.9800	.7110			1.0018	.9338	.7688
2	1	.0620	.3970	442.05	442.41	6.3942	.8418	.4461
	2	.9380	.6030			1.0155	.9340	.5539
3	1	.1080	.4770	437.55	436.06	4.7908	.8328	.5358
	2	.8920	.5230			1.0432	.9357	.4642
4	1	.1360	.4950	437.05	433.97	4.1209	.8299	.5641
	2	.8640	.5050			1.0654	.9366	.4359
5	1	.1750	.5260	435.65	432.13	3.4301	.8273	.5890
	2	.8250	.4740			1.1020	.9375	.4110
6	1	.2440	.5610	433.75	430.32	2.6328	.8249	.6144
	2	.7560	.4390			1.1818	.9387	.3856
7	1	.3720	.5930	433.05	428.53	1.8557	.8225	.6435
	2	.6280	.4070			1.3786	.9405	.3565
8	1	.3820	.5950	432.25	428.42	1.8158	.8224	.6456
	2	.6180	.4050			1.3968	.9406	.3544
9	1	.4890	.6320	431.55	427.38	1.4918	.8211	.6687
	2	.5110	.3680			1.6248	.9423	.3313
10	1	.5900	.6690	431.05	426.60	1.2981	.8203	.6940
	2	.4100	.3310			1.9122	.9445	.3060
11	1	.6410	.6990	430.95	426.32	1.2258	.8201	.7089
	2	.3590	.3010			2.0960	.9460	.2911
12	1	.7520	.7580	430.75	426.11	1.1091	.8207	.7493
	2	.2480	.2420			2.6387	.9504	.2507
13	1	.8630	.8500	430.35	427.12	1.0354	.8251	.8118
	2	.1370	.1500			3.5252	.9588	.1882

ERROR ON Y(1)= ABS(Y(1)-YE(1))/DATA POINTS= .0439
ERROR ON TEMPERATURE= ABS(T-TE)/DATA POINTS= 3.58

TABLE 4.41. Bubble T Results for acetone(1)-Water(2) System
Using UNIFAC at 13.610 atm(15)

PRESSURE= 13.610 ATM

DATA	COMP	GIVEN			CALCULATED			
		X	YE	TE	T	GAMA	FHI	Y
1	1	.0200	.2890	450.35	456.31	8.2585	.8628	.2194
	2	.9800	.7110			1.0017	.9339	.7806
2	1	.0620	.3970	442.05	443.55	6.0926	.8434	.4312
	2	.9380	.6030			1.0154	.9339	.5688
3	1	.1080	.4770	437.55	437.34	4.5805	.8345	.5211
	2	.8920	.5230			1.0432	.9354	.4789
4	1	.1360	.4950	437.05	435.34	3.9357	.8317	.5489
	2	.8640	.5050			1.0658	.9362	.4511
5	1	.1750	.5260	435.65	433.66	3.2634	.8294	.5723
	2	.8250	.4740			1.1035	.9370	.4277
6	1	.2440	.5610	433.75	432.16	2.4810	.8273	.5942
	2	.7560	.4390			1.1867	.9379	.4058
7	1	.3720	.5930	433.05	430.83	1.7233	.8255	.6176
	2	.6280	.4070			1.3938	.9391	.3824
8	1	.3820	.5950	432.25	430.74	1.6851	.8254	.6194
	2	.6180	.4050			1.4129	.9392	.3806
9	1	.4890	.6320	431.55	429.84	1.3822	.8242	.6422
	2	.5110	.3680			1.6458	.9407	.3578
10	1	.5900	.6690	431.05	429.10	1.2124	.8233	.6723
	2	.4100	.3310			1.9191	.9430	.3277
11	1	.6410	.6990	430.95	428.81	1.1531	.8230	.6917
	2	.3590	.3010			2.0799	.9448	.3083
12	1	.7520	.7580	430.75	428.67	1.0654	.8239	.7473
	2	.2480	.2420			2.4922	.9505	.2527
13	1	.8630	.8500	430.35	429.80	1.0183	.8297	.8288
	2	.1370	.1500			3.0036	.9613	.1712

ERROR ON Y(1)= ABS(Y(1)-YE(1))/DATA POINTS= .0295
ERROR ON TEMPERATURE= ABS(T-TE)/DATA POINTS= 1.93

TABLE 4.42. Bubble T Results for Ethanol(1)-Water(2) System
Using UNIQUAC at 20.410 atm(15)

PRESSURE= 20.410 ATM

DATA	COMP	GIVEN			CALCULATED			
		X	YE	TE	T	GAMA	FHI	Y
1	1	.0173	.1080	481.65	481.66	4.1725	.8577	.1033
	2	.9827	.8920			1.0008	.9135	.8917
2	1	.0458	.2190	475.95	475.08	3.6404	.8476	.2307
	2	.9542	.7810			1.0055	.9110	.7693
3	1	.0527	.2330	475.25	473.82	3.5278	.8457	.2531
	2	.9473	.7670			1.0072	.9106	.7469
4	1	.0565	.2400	474.75	473.18	3.4682	.8447	.2646
	2	.9435	.7600			1.0082	.9104	.7354
5	1	.0610	.2570	473.85	472.46	3.3997	.8436	.2773
	2	.9390	.7430			1.0095	.9102	.7227
6	1	.0917	.3070	471.25	468.43	2.9883	.8373	.3471
	2	.9083	.6930			1.0207	.9093	.6529
7	1	.1300	.3650	467.95	465.00	2.5867	.8320	.4058
	2	.8700	.6350			1.0396	.9088	.5942
8	1	.1570	.3890	466.75	463.24	2.3605	.8292	.4360
	2	.8430	.6110			1.0559	.9088	.5640
9	1	.2180	.4310	464.35	460.44	1.9736	.8249	.4857
	2	.7820	.5690			1.1009	.9089	.5143
10	1	.3420	.5090	461.35	457.10	1.5084	.8196	.5534
	2	.6580	.4910			1.2216	.9100	.4466
11	1	.4720	.5840	458.85	454.87	1.2559	.8162	.6139
	2	.5280	.4160			1.3845	.9122	.3861
12	1	.5360	.6210	458.05	454.02	1.1785	.8150	.6453
	2	.4640	.3790			1.4772	.9137	.3547

ERROR ON Y(1)= ABS(Y(1)-YE(1))/DATA POINTS= .0299

ERROR ON TEMPERATURE= ABS(T-TE)/DATA POINTS= 2.56

TABLE 4.43. Bubble T Results for Ethanol(1)-Water(2) System
Using UNIFAC at 20.410 atm(15)

PRESSURE= 20.410 ATM

DATA	COMP	GIVEN			CALCULATED			
		X	YE	TE	T	GAMA	FHI	Y
1	1	.0173	.1080	481.65	480.07	5.2461	.8554	.1336
	2	.9827	.8920			1.0011	.9128	.8664
2	1	.0458	.2190	475.95	472.46	4.3603	.8438	.2670
	2	.9542	.7810			1.0073	.9101	.7330
3	1	.0527	.2330	475.25	471.12	4.1826	.8418	.2895
	2	.9473	.7670			1.0096	.9097	.7105
4	1	.0565	.2400	474.75	470.45	4.0899	.8407	.3008
	2	.9435	.7600			1.0109	.9095	.6992
5	1	.0610	.2570	473.85	469.70	3.9847	.8396	.3132
	2	.9390	.7430			1.0126	.9093	.6868
6	1	.0917	.3070	471.25	465.74	3.3789	.8335	.3778
	2	.9083	.6930			1.0267	.9085	.6222
7	1	.1300	.3650	467.95	462.60	2.8302	.8286	.4287
	2	.8700	.6350			1.0498	.9082	.5713
8	1	.1570	.3890	466.75	461.06	2.5393	.8261	.4541
	2	.8430	.6110			1.0692	.9082	.5459
9	1	.2180	.4310	464.35	458.65	2.0703	.8223	.4957
	2	.7820	.5690			1.1207	.9084	.5043
10	1	.3420	.5090	461.35	455.65	1.5511	.8176	.5561
	2	.6580	.4910			1.2522	.9095	.4439
11	1	.4720	.5840	458.85	453.50	1.2854	.8143	.6147
	2	.5280	.4160			1.4228	.9116	.3853
12	1	.5360	.6210	458.05	452.68	1.2047	.8131	.6454
	2	.4640	.3790			1.5197	.9132	.3546

ERROR ON Y(1)= ABS(Y(1)-YE(1))/DATA POINTS= .0511

ERROR ON TEMPERATURE= ABS(T-TE)/DATA POINTS= 4.69

TABLE 4.44. Comparison of Bubble T Results of Acetone(1)-

Water(2) System at Various Pressures

DATA POINTS	P (ATM)	AMD(P.R.)IN Y	AMD(ID)IN Y	DAMD
12	.658	.0124	.0124	.0000
13	1.000	.0138	.0142	.0004
12	3.402	.0220	.0229	.0009
11	6.805	.0198	.0234	.0036
13	13.610	.0295	.0335	.0040
8	17.010	.0263	.0310	.0047

P.R.=PENG ROBINSON EQUATION
ID=IDEAL

DAMD=AMD(ID)-AMD(P.R.)

TABLE 4.45 Comparison of Bubble T Results of Ethanol(1)-

Water(2) System at Various Pressures

DATA POINTS	P (ATM)	AMD(P.R.)IN Y	AMD(ID)IN Y	DAMD
12	.929	.0029	.0029	.0000
15	1.000	.0036	.0051	.0015
18	3.402	.0061	.0108	.0047
18	6.805	.0407	.0478	.0071
18	13.610	.0231	.0360	.0129
12	20.410	.0313	.0481	.0168

TABLE 4.46. Bubble P Results of Nitrogen(1)-n-Butane(2)
Binary System(15)

TEMPERATURE= 310.95 K

		GIVEN			CALCULATED			
DATA	COMP	X	YE	PE	P	GAMA	FHI	Y
1	1	.0750	.7590	15.050	17.544	2.5800	1.0133	.7743
	2	.9750	.2410			.9997	.7064	.2257
2	1	.1210	.3900	63.310	73.212	2.5800	1.0129	.9137
	2	.8790	.6100			.9914	.4369	.0863
3	1	.1640	.9000	122.400	96.827	2.5800	1.0340	.9173
	2	.8360	.1000			.9831	.3252	.0827
ERROR ON Y(1)= ABS(YE(1)-Y(1))/DATA POINTS=							.0188	
ERROR ON P= ABS(PE-P)/DATA POINTS=							12.423	

TABLE 4.47. Bubble P Results of Hydrogen(1)- n-Hexane(2)
Binary System(20)

TEMPERATURE= 277.59 K

		GIVEN			CALCULATED			
DATA	COMP	X	YE	PE	P	GAMA	FHI	Y
1	1	.0280	.9950	34.000	17.474	19.6012	1.0055	.9953
	2	.9720	.0040			.9996	.8851	.0047
2	1	.0540	.9980	68.000	33.412	19.6012	1.0120	.9974
	2	.9460	.0020			.9984	.8047	.0026
3	1	.0780	.9980	102.000	47.893	19.6012	1.0191	.9981
	2	.9220	.0020			.9966	.7419	.0019
4	1	.0990	.9980	136.000	60.356	19.6012	1.0261	.9984
	2	.9010	.0020			.9944	.6941	.0016
ERROR ON Y(1)= ABS(YE(1)-Y(1))/DATA POINTS=							.0005	
ERROR ON P= ABS(PE-P)/DATA POINTS=							45.216	

5 .CONCLUSION AND RECOMMENDATIONS

VLE predictions by UNIQUAC and UNIFAC equations are generally in good agreement with the experimental data. However, from one system to another, one equation sometimes seemed to be better than the other. But, the applicability of UNIFAC to a wide variety of mixtures makes it superior to UNIQUAC for condensable systems. For noncondensable systems UNIFAC can not be applied.

Even though vapor phase nonidealities at low pressures are small and thus they can be neglected, they must be taken into account for pressures higher than atmospheric for accurate VLE predictions. Peng-Robinson is a practical equation to use for vapor phase nonideality predictions.

In conclusion, it can be said that accurate design calculations can be performed either by UNIQUAC or by UNIFAC. If interaction parameters can be predicted accurately for all systems, UNIQUAC and UNIFAC will give good results for all systems. This, of course, requires plentiful accurate experimental data for binary systems.

Recently, UNIFAC has been modified (22,23). In modified UNIFAC, temperature dependence is assumed for interaction parameters and six adjustable parameters are used for one binary group combination. Also, modified UNIFAC has a different combinatorial term. Because of the lack of the binary parameters, it could not be applied in this study. However, VLENC prepared in this study has an option to do calculations by modified UNIFAC, if necessary data are given.

For further study, it is recommended to apply modified UNIFAC and compare the results with UNIQUAC and unmodified UNIFAC. It is, also, recommended to improve the thermodynamic relations to express the behaviour of systems containing noncondensable components.

REFERENCES

1. Prausnitz, J.M., Anderson, T., Grens, E., Eckert, C., Hsieh, R., O'Connell, J., "Computer Calculations for Multicomponent Vapor-Liquid and Liquid-Liquid Equilibria", Prentice-Hall, Inc., Englewood Cliffs, N.J., 1980.
2. Dinçer, S., "Thermodynamics of Equilibrium Processes in Chemical Engineering Class notes, Boğaziçi University Publications, No:264, 1981.
3. Prausnitz, J.M., Eckert, C.A., Orye, R.V., O'Connell, J.P., "Computer Calculations of Multicomponent Vapor-Liquid Equilibria", Prentice-Hall, Inc., Englewood Cliffs, N.J., 1967.
4. Peng, D., Robinson, D.B., Ind.Eng.Chem.Fundam, 15, 59 (1976).
5. Peng, D., Robinson, D.B., Can.J.Chem.Eng., 54, 595 (1976).
6. Guggenheim, E.A., "Mixtures", Clarendon Press, Oxford, 1952
7. Abrams, D.S., Prausnitz, J.M., A.IChE J., 21, 116 (1975)
8. Perry, R.H., Chilton, C.H., "Chemical Engineer's Handbook", McGraw Hill Book Company, New York, 1973.
9. Bondi, A., "Physical Properties of Molecular Crystals, Liquids and Glasses", Wiley, New York, 1968.
10. Anderson, T.F., Prausnitz, J.M., Ind.Eng.Chem.Process Des.Dev., 17, 552 (1978).
11. Fredenslund, A., Jones, R.L., Prausnitz, J.M., AICHe J., 21, 1086 (1975).
12. Fredenslund, A., Gmehling J., Michelson, M.L., Rasmussen P., Prausnitz, J.M., Ind.Eng.Chem.Process.Des.Dev., 16, 450 (1977).

13. Skjold-Jorgenson, S., Kolbe, B., Ghemling, J., Rasmussen, P., Ind. Eng. Chem, Process Des. Dev., 18, 714 (1979).
14. Ghemling, J., Rasmussen, P., Fredenslund, A., Ind. Eng. Chem. Process. Des. Dev., 21 118 (1982).
15. Hirata, M., Ohe, S., Nagahama, K., "Computer Aided Data Book of Vapor-Liquid Equilibria", Kodansha-Elseveir, Japan, 1975.
16. Verhoeye, L., and De Schepper, H., J. Appl. Chem. Biotechnol. 23, 607 (1973).
17. Steinhauser, H.H., White R.R., Ind. Eng. Chem, 41, 2912 (1949).
18. Scathard, G., Ticknor, L.B., J. Am. Chem. Soc., 74, 3724 (1952)
19. Wisniak, J., Tamir, A., J. Chem. Eng. Data 22, 253, (1977).
20. Nichols, W.B., Reamer, H.H., Sage, B.H., A. I. Ch. E. J., 3, 262 (1957).
21. Wilcok, R.F., Chem. Eng. 17, 66 (1983)
22. Fredenslund, A., Rasmussen, P., "From UNIFAC to SUPERFAC and back", American Inst. of Chem. Engs., 1984 Annual Meeting, San Francisco.
23. Kiki, I., Alessi, P., Rasmussen, P., Fredenslund, A., Can. J. Chem. Eng., 58, 253 (1980).
24. Spencer, C.F., Danner, R.D. J. Chem. Eng. Data, 17, 236 (1972).
25. Reid, R.C., Prausnitz, J.M., Sherwood, T.K., "The Properties of Gases and Liquid", Mc. Graw-Hill Book Co., Inc., New York, 1977
26. Abbott, M.M., Van Ness, H.C., "Thermodynamics", Schaum's Outline Series, Mc Graw-Hill Book Company, 1972.
27. Dinçer, S., "Gaz ve Sıvıların Termofiziksel Özelliklerinin Hesaplanması", Yıldız Üniversitesi, 395, 1985.

APPENDICES

APPENDIX A

ESTIMATION OF THE PHYSICAL PROPERTIES REQUIRED

IN THE VLE CALCULATION

A.1. Liquid Molar Volume

Since the liquid molar volume is not usually known as a function of pressure, it is considered as only a function of temperature and composition for engineering purposes. Since the system pressures used in this study were quite lower than the critical pressures, no appreciable error was introduced by assuming that V_i^L in Eq. (2.11) is independent of pressure.

The liquid molar volume was calculated using modified Rackett's equation (24,27):

$$V_i^L = \frac{RT_c}{P_c} Z_a^\epsilon \quad (\text{A.1.1})$$

where

$$\epsilon = 1 + (1 - T/T_c)^{2/7} \quad \text{for } T/T_c \leq 0.75 \quad (\text{A.1.2})$$

$$\varepsilon = 1.60 + 0.00693026 (T/T_c - 0.655)^{-1} \text{ for } T/T_c \geq 0.75 \quad (\text{A.1.3})$$

The saturated molar liquid volume and its temperature derivative are continuous at T/T_c at 0.75.

Here Z_a is the modified compressibility factor proposed by Rackett. YDATAPP has a list of values of Z_a for a large number of liquids.

A.2. Saturation Vapor Pressure

The vapor pressure of components are predicted by using Antoine vapor pressure :

$$\ln P_i^S = C_1 + \frac{C_2}{T + C_3} \quad (\text{A.2.1})$$

Here P_i^S is in mmHg and T in K. The values of C_1 , C_2 , and C_3 are listed for a large number of liquids in literature [25]. The file YDATAPP contains most of them.

A.3. Acentric Factor

Acentric factor ω is a measure of the acentricity, i.e., the noncentral nature of intermolecular forces. Acentric factor is defined mathematically by (26).

$$\omega = - \log(P_r^S)_{T_{r=0.7}} - 1.000 \quad (\text{A.3.1})$$

For simple fluids $\omega \approx 0$ and for more complex fluids, $\omega > 0$.



Here $P_r^S = P_i^S / P_{ci}$.

APPENDIX B

A SAMPLE CALCULATION OF ACTIVITY

COEFFICIENTS BY UNIFAC

It is desired to obtain the activity coefficients for n-hexane(1)-benzene(2) system at 350.46 K and $X_1 = 0.0680$. (Table 4.12, 1st point)



$$R_{\text{CH}_3} = 0.9011$$

$$R_{\text{CH}_2} = 0.6744$$

$$R_{\text{ACH}} = 0.5313$$

$$Q_{\text{CH}_3} = 0.848$$

$$Q_{\text{CH}_2} = 0.540$$

$$Q_{\text{ACH}} = 0.400$$

From Eq. (2.70), we obtain r and q for the components

$$r_1 = 2 \cdot 0.9011 + 4 \cdot 0.6744 = 4.4998$$

$$r_2 = 6 \cdot 0.5313 = 3.1878$$

$$q_1 = 2.0.848 + 4.0.540 = 3.856$$

$$q_2 = 6.0.4 = 2$$

By Eqs. (2.57), (2.58) and (2.61)

$$\Phi_1 = \frac{4.4998 \times 0.0680}{4.4998 \times 0.0680 + 3.1878 \times 0.932} = 0.0934$$

$$\Phi_2 = 0.9066$$

$$\ln \Gamma_{\text{CH}_3}^{(1)} = \ln \Gamma_{\text{CH}_3}^{(1)} \quad (x_{\text{CH}_3} = \frac{1}{3}, x_{\text{CH}_2} = \frac{2}{3})$$

$$\Theta_{\text{CH}_3}^{(1)} = \frac{\frac{1}{3} \times 0.848}{\frac{1}{3} \times 0.848 + \frac{2}{3} \times 0.540} = 0.440$$

$$\Theta_{\text{CH}_2}^{(2)} = 0.560$$

For pure n-hexane, form Eq. (2.74)

$$\ln \Gamma_{\text{CH}_3}^{(1)} = 0.848 \left| 1 - \ln(0.440 + 0.560) \right| - \left| \frac{0.440 + 0.560}{0.440 + 0.560} \right|$$

$$\ln F_{\text{CH}_3}^{(1)} = 0.0$$

$$\ln \Gamma_{\text{CH}_2}^{(1)} = 0.0$$

It is as expected because $\Psi_{\text{CH}_3, \text{CH}_2} = \Psi_{\text{CH}_2, \text{CH}_3} = 1.0$

For the mixture at $x_1 = 0.0680$

$$x_{\text{CH}_3} = \frac{0.068 \times 2}{0.068 \times 2 + 0.068 \times 4 + 0.932 \times 6}$$

$$x_{\text{CH}_2} = 0.0227$$

$$x_{\text{CH}_2} = 0.0453$$

$$x_{\text{ACH}} = 0.932$$

$$\theta_{\text{CH}_3} = \frac{0.0227 \times 0.848}{0.0227 \times 0.848 + 0.0453 \times 0.540 + 0.932 \times 0.4}$$

$$\theta_{\text{CH}_3} = 0.0462$$

$$\theta_1 = \frac{3.856 \times 0.0680}{3.856 \times 0.0680 + 2.4 \times 0.932} = -0.1049$$

$$\theta_2 = 0.8951$$

$$l_1 = 5 \cdot (4.4998 - 3.856) - (4.4998 - 1) = -0.2808$$

$$l_2 = 5 \cdot (3.1878 - 2.4) - (3.1878 - 1) = 1.7512$$

Substituting Φ, θ, l and q into Eq. (2.69) :

$$\ln \gamma_1^C = \ln \frac{0.0934}{0.0680} + 5(3.856) \ln \frac{0.1049}{0.0934} - 0.2808$$

$$\frac{0.0934}{0.0680} \left[0.0680 \cdot (-0.2808) + 0.932 \cdot 1.7512 \right]$$

$$\ln \gamma_1^C = 0.0598$$

CH_3, CH_2 has the same main group : $\text{CH}_2 = \begin{matrix} \text{CH}_3 \\ \text{CH}_2 \\ \text{CH} \end{matrix}$

$$\text{So, } a_{\text{CH}_3, \text{CH}_2} = a_{\text{CH}_2, \text{CH}_3} = 0.0$$

$$a_{\text{CH}_2, \text{ACH}} = 61.13 \text{ K}$$

$$a_{\text{ACH}, \text{CH}_2} = -11.12$$

From Eq. (2.76) :

$$\Psi_{\text{CH}_2, \text{ACH}} = \exp \left| - \frac{61.13}{350.46} \right| = 0.83994$$

$$\Psi_{\text{ACH}, \text{CH}_2} = \exp \left| - \frac{-11.12}{350.46} \right| = 1.03224$$

$$\Theta_{\text{CH}_3} = 0.0587$$

$$\Theta_{\text{ACH}} = 0.8951$$

From Eq (2.74)

$$\ln \Gamma_{\text{CH}_3} = 0.848 \left| 1 - \ln(0.0462 + 0.0587 + 0.8951 \cdot 1.03224) \right|$$

$$- \left| \left(\frac{0.462 + 0.0587}{(0.0462 + 0.587 + 0.8959 \cdot 1.1 \cdot 0.03224)} \right) \right|$$

$$+ \left(\frac{0.8951 \cdot 0.83994}{(0.0462 \cdot 0.83994 + 0.0587 \cdot 0.83994 + 0.8951)} \right)$$

$$\ln \Gamma_{\text{CH}_3} = 0.0890$$

$$\ln \Gamma_{\text{CH}_2} = 0.0567$$

From Eq(2.73)

$$\ln \gamma_1^R = 2x(0.0890-0.0) + 4.(0.0567-0.0)$$

$$\ln \gamma_1^R = 0.4048$$

$$\ln \gamma_1 = \ln \gamma_1^C + \ln \gamma_1^R = 0.0598 + 0.4048$$

$$\gamma_1 = 1.60$$

by following exactly same procedure for benzene

$$\gamma_2 = 1.00$$

APPENDIX C

PURE COMPONENT AND COMPONENT INTERACTION

PARAMETERS

TABLE C.1 UNIQUAC Pure Component Parameters

COMPONENT	R	q
HYDROGEN	.00	.00
NITROGEN	.00	.00
OXYGEN	.00	.00
CARBON MONOXIDE	.09	.00
ARGON	.00	.00
METHANE	.00	.00
CARBON TETRACHLORIDE	3.33	2.82
CHLOROFORM	2.70	2.34
DIHLOROMETHANE	2.14	1.92
FORMIC ACID	1.54	1.43
NITRO-METHANE	2.01	1.37
METHANOL	1.43	1.43
CARBON DIOXIDE	1.32	1.28
CARBON DISULFIDE	2.08	1.81
TRICHLOROETHYLENE	3.31	2.86
ACETYLENE	1.52	1.39
ACETONITRILE	1.87	1.72
ETHYLENE	1.57	1.49
1,2-DICHLOROETHANE	2.88	2.52
ACETALDEHYDE	1.90	1.80
ACETIC ACID	2.23	2.04
ETHYL IODIDE	2.84	2.38
NITRO-ETHANE	2.68	2.41
ETHANE	1.80	1.70
ETHANOL	2.11	1.97
DIMETHYL AMINE	2.33	2.09
ETYLENE GLYCOL	2.41	2.25
PROPYLENE	2.25	2.02
ACETONE	2.57	2.34
METHYL ACETATE	2.80	2.58
PROPIONIC ACID	2.90	2.58
1-NITROPROPANE	3.36	2.95
2-NITROPROPANE	3.36	2.95
PROPANE	2.48	2.24
N-PROPANOL	2.78	2.51
I-PROPANOL	2.78	2.51
TRIMETHYLAMINE	2.99	2.64
BUTENE-1	2.92	2.56
2-BUTANONE	3.25	2.88
TETRAHYDROFURAN	2.94	2.40
DIOXANE	3.07	2.28
ETHYL ACETATE	3.48	3.12
N-BUTANE	3.15	2.75
I-BUTANE	3.15	2.77
N-BUTANOL	3.45	3.05
I-BUTANOL	3.45	3.05
SEC-BUTANOL	3.45	3.05
TERT-BUTANOL	3.45	3.05
DI-ETHYL ETHER	3.39	3.02
ETHYL CELLOSOLVE	3.70	3.29
DIETHYL AMINE	3.68	3.17
FURFURAL	3.17	2.48
PYRIDINE	3.00	2.16
ISOPRENE	3.36	3.01
CYCLOPENTANE	3.30	2.47
ISOPENTANE	3.82	3.31
N-PENTANE	3.82	3.31
CHLOROBENZENE	3.79	2.84
NITRO-BENZENE	4.13	3.14
BENZENE	3.19	2.40
PHENOL	3.55	2.70
ANILINE	3.72	2.82
CYCLOHEXANONE	4.07	3.11
CYCLOHEXANE	3.97	3.01
HEXENE-1	4.27	3.64
METHYLCYCLOPENTANE	3.97	3.01
CYCLOHEXANOL	4.27	3.51
METHYLISOBUTYLKETONE	4.60	4.03
N-BUTYL ACETATE	4.83	4.20
N-HEXANE	4.50	3.86
2,3-DIMETHYL BUTANE	4.50	3.86
TRIETHYLAMINE	5.01	4.26

... Continued

TABLE C.1 Continued

TOLUENE	3.92	2.97
METHYL CYCLOHEXANE	4.64	3.55
N-HEPTANE	5.17	4.40
STYRENE	4.37	3.30
ETHYL BENZENE	4.60	3.51
M-XYLENE	4.66	3.54
O-XYLENE	4.66	3.54
P-XYLENE	4.66	3.54
N-OCTANE	5.85	4.94
2,2,4-TRIMETHYLPENTANE	5.85	4.94
N-DECANE	7.20	6.02
N-HEXADECANE	11.24	9.26
HYDROGEN CHLORIDE	1.00	1.00
WATER	0.92	1.40
HYDROGEN SULFIDE	1.00	1.00
AMMONIA	1.00	1.00
SULFUR DIOXIDE	1.55	1.45
ANISOLE	4.17	3.21
ACRYLONITRILE	2.31	2.05
VINYL ACETATE	3.25	2.90

COMPONENT

Q'

WATER	1.00
METHANOL	0.96
ETHANOL	0.92
N-PROPANOL	0.89
I-PROPANOL	0.89
N-BUTANOL	0.88
I-BUTANOL	0.88
SEC-BUTANOL	0.88
TERT-BUTANOL	0.88
CYCLOHEXANOL	1.78

TABLE C.2 UNIQUAC Interaction Parameters

COMPONENT 1	COMPONENT 2	A(1,2)	A(2,1)
ACETONE	ACETIC ACID	461.81	-262.30
ACETONE	ACETONITRILE	-176.38	261.53
ACETONE	BENZENE	-115.95	253.47
ACETONE	CHLOROFORM	-147.83	70.60
ACETONE	CARBON DISULFIDE	103.91	157.31
ACETONE	CARBON TETRACHLORIDE	-92.32	246.68
ACETONE	ETHANOL	404.49	-131.25
ACETONE	FURFURAL	-101.30	195.63
ACETONE	METHANOL	359.10	-96.90
ACETONE	N-HEXANE	-33.08	261.51
ACETONE	N-PENTANE	-22.83	266.31
ACETONE	VINYL ACETATE	-82.48	110.60
ACETONE	WATER	466.36	-56.91
ACETONE	HYDROGEN	218.00	3.23
ACETONE	CARBON MONOXIDE	408.00	.48
ACETONE	METHANE	471.00	-.26
ACRYLONITRIL	ACETONITRILE	573.80	-263.76
ACRYLONITRIL	WATER	575.58	-141.17
ACETIC ACID	ACETALDEHYDE	-212.77	458.43
ACETIC ACID	CHLOROFORM	-98.44	346.43
ACETIC ACID	ETHYL ACETATE	-214.39	426.54
ACETIC ACID	ETHANOL	244.67	-210.53
ACETIC ACID	FORMIC ACID	241.64	-144.58
ACETIC ACID	N-BUTANOL	546.68	-296.30
ACETIC ACID	N-HEPTANE	-8.49	342.57
ACETIC ACID	N-PROPANOL	445.77	299.33
ACETIC ACID	TOLUENE	-67.91	298.09
ACETIC ACID	VINYL ACETATE	-140.18	360.56
ACETIC ACID	WATER	518.98	-296.05
ACETALDEHYDE	VINYL ACETATE	-117.74	243.51
ACETONITRILE	BENZENE	-40.70	229.79
ACETONITRILE	CARBON TETRACHLORIDE	-40.18	458.86
ACETONITRILE	ETHANOL	430.51	68.72
ACETONITRILE	N-HEPTANE	23.71	545.79
ACETONITRILE	WATER	294.10	61.92
ANILINE	METHYLCYCLOPENTANE	54.36	228.71
ANILINE	N-HEXANE	34.82	283.76
ANISOLE	METHANOL	782.28	-48.39
BENZENE	2-BUTANONE	185.55	-144.21
BENZENE	CHLOROFORM	-121.79	83.58
BENZENE	CARBON TETRACHLORIDE	43.39	-37.52
BENZENE	CYCLOPENTANE	33.15	15.19
BENZENE	CYCLOHEXANE	-16.85	66.85
BENZENE	DIOXANE	-197.65	363.78
BENZENE	ETHYL ACETATE	-192.00	248.71
BENZENE	ETHANOL	947.20	-138.90
BENZENE	FURFURAL	-85.00	193.72
BENZENE	I-BUTANOL	861.06	-162.39
BENZENE	I-PROPANOL	854.75	-145.52
BENZENE	METHYLCYCLOPENTANE	-6.47	56.47
BENZENE	METHYL ACETATE	-207.37	278.33
BENZENE	METHANOL	912.41	-50.58
BENZENE	N-BUTANOL	928.90	-181.24
BENZENE	N-HEPTANE	-32.03	87.50
BENZENE	N-HEXANE	-77.13	132.43
BENZENE	N-PROPANOL	928.50	-155.10
BENZENE	1-NITROPROPANE	-246.81	535.16
BENZENE	2-NITROPROPANE	-344.15	794.91
BENZENE	NITRO-ETHANE	46.05	16.61
BENZENE	NITRO-METHANE	163.25	8.34
BENZENE	SEC-BUTANOL	-168.83	784.99
BENZENE	TERT-BUTANOL	-165.40	744.89

... Continued

TABLE C.2 Continued

BENZENE	224-TRIMETHYLPENTANE	-35.12	91.55
BENZENE	TOLUENE	-220.57	330.69
BENZENE	WATER	2057.42	115.13
BENZENE	HYDROGEN	810.00	1.97
BENZENE	CARBON MONOXIDE	1062.00	-1.04
BENZENE	METHANE	473.00	-.33
2-BUTANONE	METHANOL	803.49	-164.22
2-BUTANONE	N-HEPTANE	-75.13	242.53
2-BUTANONE	TOLUENE	-82.85	123.57
2-BUTANONE	WATER	622.84	-55.89
CHLOROFORM	CARBON TETRACHLORIDE	-47.33	76.09
CHLOROFORM	ETHYL ACETATE	24.16	-119.49
CHLOROFORM	ETHANOL	888.68	-203.03
CHLOROFORM	FORMIC ACID	461.38	90.36
CHLOROFORM	METHYL ACETATE	121.17	-187.87
CHLOROFORM	METHANOL	926.31	-143.50
CARBON DISULFIDE	METHANOL	1166.49	138.15
CARBON TETRACHLORIDE	CYCLOHEXANE	124.50	-101.32
CARBON TETRACHLORIDE	ETHANOL	1583.69	-143.68
CARBON TETRACHLORIDE	FURFURAL	476.85	-100.42
CARBON TETRACHLORIDE	METHYLCYCLOPENTANE	161.96	-129.21
CARBON TETRACHLORIDE	METHANOL	1127.95	-29.64
CARBON TETRACHLORIDE	N-BUTANOL	1248.17	-188.77
CARBON TETRACHLORIDE	N-HEPTANE	88.30	-59.13
CARBON TETRACHLORIDE	N-PROPANOL	1075.47	-186.06
CARBON TETRACHLORIDE	1-NITROPROPANE	267.13	-95.68
CARBON TETRACHLORIDE	2-NITROPROPANE	307.25	-134.32
CARBON TETRACHLORIDE	NITRO-ETHANE	295.06	73.06
CARBON TETRACHLORIDE	NITRO-METHANE	398.40	.59
CARBON TETRACHLORIDE	TOLUENE	-168.53	203.67
CYCLOHEXANE	ETHANOL	1269.49	-113.70
CYCLOHEXANE	FURFURAL	265.87	44.32
CYCLOHEXANE	METHYLCYCLOPENTANE	144.37	-118.82
CYCLOHEXANE	METHANOL	1364.12	6.02
CYCLOHEXANE	N-BUTANOL	1360.84	-217.82
CYCLOHEXANE	N-HEXANE	172.73	-145.56
CYCLOHEXANE	N-PROPANOL	1364.65	-168.39
CYCLOHEXANE	NITRO-METHANE	517.19	105.01
CYCLOHEXANE	224-TRIMETHYLPENTANE	-105.65	128.20
CYCLOHEXANE	TOLUENE	83.67	-44.04
1,2-DICHLOROETHANE	ETHANOL	787.17	-104.86
DIETHYL AMINE	METHANOL	676.42	-374.88
DI-ETHYL ETHER	ETHANOL	733.67	-179.02
DIOXANE	WATER	927.26	-328.70
2,3-DIMETHYL BUTANE	METHANOL	1463.90	-7.18
ETHYL ACETATE	ETHYL BENZENE	183.96	-137.27
ETHYL ACETATE	ETHANOL	571.73	-167.61
ETHYL ACETATE	FURFURAL	-19.15	48.52
ETHYL ACETATE	I-PROPANOL	522.07	-190.57
ETHYL ACETATE	METHANOL	579.61	-107.54
ETHYL ACETATE	N-PROPANOL	539.64	-190.31
ETHYL ACETATE	TOLUENE	309.41	-214.26
ETHYL ACETATE	WATER	1081.40	-222.02
ETHANE	N-HEPTANE	264.89	-112.61
ETHANOL	HEXENE-1	-107.26	1222.95
ETHANOL	METHYL CYCLOHEXANE	-117.57	1340.56
ETHANOL	METHYLCYCLOPENTANE	-118.27	1383.93
ETHANOL	METHYL ACETATE	-130.78	573.43
ETHANOL	METHANOL	-292.39	660.19
ETHANOL	N-DECANE	-127.48	1254.65
ETHANOL	N-HEPTANE	-88.48	1180.60
ETHANOL	N-HEXANE	-108.93	1441.57
ETHANOL	N-OCTANE	-123.57	1354.92
ETHANOL	N-PROPANOL	210.95	-67.70

TABLE C.2 Continued

ETHANOL	224-TRIMETHYLPENTANE	-103.21	1443.34
ETHANOL	TOLUENE	-103.87	805.83
ETHANOL	WATER	-71.06	387.38
FURFURAL	224-TRIMETHYLPENTANE	-63.19	385.84
FURFURAL	TOLUENE	244.12	74.87
FORMIC ACID	WATER	924.01	-525.35
I-PROPANOL	N-DECANE	-207.27	1074.76
I-PROPANOL	N-HEPTANE	-173.79	1243.35
I-PROPANOL	N-OCTANE	-166.18	1107.44
I-PROPANOL	224-TRIMETHYLPENTANE	-198.06	994.00
METHYLISOBUTYLKETONE	METHANOL	688.03	-105.94
METHYLISOBUTYLKETONE	PROPIONIC ACID	136.46	-78.49
METHYL CYCLOHEXANE	TOLUENE	210.35	-134.19
METHYLCYCLOPENTANE	N-HEXANE	162.13	-138.34
METHYLCYCLOPENTANE	TOLUENE	89.77	-48.05
METHYL ACETATE	METHANOL	516.12	-95.31
METHANOL	N-HEPTANE	4.84	1325.89
METHANOL	N-HEXANE	-2.66	1636.05
METHANOL	TOLUENE	-27.12	872.31
METHANOL	TRIETHYLAMINE	-186.66	664.29
METHANOL	WATER	-50.82	148.27
METHANOL	HYDROGEN	218.00	3.94
METHANOL	CARBON MONOXIDE	552.00	.83
N-BUTANE	NITROGEN	814.00	-1.67
N-BUTANE	METHANE	731.00	-2.05
N-BUTANOL	N-DECANE	-259.67	1430.77
N-BUTANOL	N-HEPTANE	-251.11	1291.98
N-BUTANOL	N-HEXANE	-159.24	1370.74
N-BUTANOL	N-OCTANE	-236.21	1098.91
N-BUTANOL	WATER	30.64	1098.06
N-DECANE	N-PROPANOL	1137.20	-201.32
N-DECANE	METHANE	150.00	-.24
N-HEPTANE	N-PROPANOL	1083.59	-142.34
N-HEPTANE	TOLUENE	108.24	-72.06
N-HEXANE	N-PROPANOL	1311.01	-152.85
N-HEXANE	2-NITROPROPANE	252.20	-32.95
N-HEXANE	NITRO-ETHANE	230.64	-5.86
N-HEXANE	TOLUENE	220.93	-148.51
N-HEXANE	HYDROGEN	-4.00	2.99
N-HEXANE	NITROGEN	336.00	.07
N-HEXANE	METHANE	94.00	-.06
N-OCTANE	NITRO-ETHANE	333.48	-30.98
N-OCTANE	PROPIONIC ACID	556.12	-183.20
N-OCTANE	CARBON MONOXIDE	1878.00	-3.38
N-PENTANE	METHANE	509.00	-1.32
N-PROPANOL	NITRO-ETHANE	-94.39	574.22
N-PROPANOL	TOLUENE	-195.40	818.34
N-PROPANOL	WATER	23.26	587.18
NITRO-ETHANE	224-TRIMETHYLPENTANE	10.66	236.48
NITRO-ETHANE	WATER	920.08	138.44
PROPANE	METHANE	604.00	-2.01
PROPIONIC ACID	WATER	433.89	-164.67
224-TRIMETHYLPENTANE	TOLUENE	-2.88	19.29
TOLUENE	WATER	1371.36	305.71
VINYL ACETATE	WATER	1541.72	130.05
WATER	HYDROGEN	-880.00	9.97
WATER	NITROGEN	913.00	3.76
HYDROGEN	NITROGEN	.00	.00
HYDROGEN	CARBON MONOXIDE	.00	.00
HYDROGEN	METHANE	.00	.00
NITROGEN	CARBON MONOXIDE	.00	.00
NITROGEN	METHANE	.00	.00
CARBON MONOXIDE	METHANE	.00	.00

TABLE C.3 UNIFAC Functional Group Parameters

MAIN GROUP	SUB GROUP	NO	R	Q
1 CH ₂	CH ₃	1	.9011	.848
	CH ₂	2	.6744	.540
	CH	3	.4469	.228
	C	4	.2195	.000
2 C=C	CH ₂ =CH	5	1.3454	1.176
	CH=CH	6	1.1167	.867
	CH ₂ =C	7	1.1173	.983
	CH=C	8	.8886	.676
	C=C	9	.6605	.485
3 ACH	ACH	10	.5313	.400
	AC	11	.3652	.120
4 ACCH ₂	ACCH ₃	12	1.2663	.968
	ACCH ₂	13	1.0396	.660
	ACCH	14	.8121	.348
5 OH	OH	15	1.0000	1.200
6 CH ₃ OH	CH ₃ OH	16	1.4311	1.432
7 H ₂ O	H ₂ O	17	0.92	1.40
8 ACOH	ACOH	18	.8952	.680
9 CH ₂ CO	CH ₃ CO	19	1.6724	1.488
	CH ₂ CO	20	1.4457	1.180
10 CHO	CHO	21	.9980	.948
11 CC ₀₀	CH ₃ CO ₀	22	1.9031	1.728
	CH ₂ CO ₀	23	1.6764	1.420
12 HC ₀₀	HC ₀₀	24	1.2420	1.188
13 CH ₂ O	CH ₃ O	25	1.1450	1.088
	CH ₂ O	26	0.9183	0.780
	CH-O	27	0.6908	0.468
	FCH ₂ O	28	0.9183	1.100
14 CNH ₂	CH ₃ NH ₂	29	1.5959	1.544
	CH ₂ NH ₂	30	1.3692	1.236
	CHNH ₂	31	1.1417	0.924
15 CNH	CH ₃ NH	32	1.4337	1.244
	CH ₂ NH	33	1.2070	0.936
	CHNH	34	0.9795	.624
16 (C)N	CH ₃ N	35	1.1865	0.940
	CH ₂ N	36	0.9597	0.632
17 ACNH ₂	ACNH ₂	37	1.0600	0.816
18 PYRIDINE	C ₅ H ₅ N	38	2.9993	2.113
	C ₅ H ₄ N	39	2.8332	1.833
	C ₅ H ₃ N	40	2.6670	1.553
19 CCN	CH ₃ CN	41	1.8701	1.724
	CH ₂ CN	42	1.6434	1.416
20 COOH	COOH	43	1.3013	1.224
	HC ₀₀ H	44	1.5280	1.532
21 CCL	CH ₂ CL	45	1.4654	1.264
	CHCL	46	1.2380	0.952
	CCL	47	1.0060	0.724

... Continued

TABLE C.3 Continued

22	CCL2	CH2CL2	48	2.2564	1.988
		CHCL2	49	2.0606	1.684
		CCL2	50	1.8016	1.448
23	CCL3	CHCL3	51	2.8700	2.410
		CCL3	52	2.6401	2.184
24	CCL4	CCL4	53	3.3900	2.910
25	ACCL	ACCL	54	1.1562	0.844
26	CN02	CH3N02	55	2.0086	1.868
		CH2N02	56	1.7818	1.560
		CHN02	57	1.5544	1.248
27	ACN02	ACN02	58	1.4199	1.104
28	CS2	CS2	59	2.0570	1.650
29	CH3SH	CH3SH	60	1.8770	1.676
		CH2SH	61	1.6510	1.368
30	FURFURAL	FURFURAL	62	3.1680	2.481
31	DOH	(CH2OH)2	63	2.4088	2.248
32	I	I	64	1.2640	0.992
33	BR	BR	65	0.9492	0.832
34	C C	CH C	66	1.2920	1.088
		C C	67	1.0613	0.784
35	ME2SO	ME2SO	68	2.8266	2.472
36	ACRY	ACRY	69	2.3144	2.052
37	CLCC	CL(C=C)	70	0.7910	0.724
38	ACF	ACF	71	0.6948	0.524
39	DMF	DMF-1	72	3.0856	2.736
		DMF-2	73	2.6322	2.120
40	CF2	CF3	74	1.4060	1.380
		CF2	75	1.0105	0.920
		CF	76	0.6150	0.460

TABLE C.4 UNIFAC Functional Group Interaction Parameters

GROUP	1	2	3	4	5	6	7	8
1 CH2	.00	-200.00	61.13	76.50	986.50	697.20	1318.00	2789.00
2 C=C	2520.00	.00	340.00	4102.70	639.90	1509.00	634.20	9999.99
3 ACH	-11.12	-94.78	.00	167.00	636.10	637.40	903.80	1397.00
4 ACCH2	-69.70	-269.70	-146.80	.00	803.20	603.30	5695.00	726.30
5 OH	156.40	8694.00	89.60	25.82	.00	-137.10	353.50	286.30
6 CH3OH	16.51	-52.39	-50.00	-44.50	249.10	.00	-181.00	9999.99
7 H2O	300.00	692.70	362.30	377.60	-229.10	289.60	.00	442.00
8 ACOH	310.00	9999.99	2043.00	6245.00	-533.00	9999.99	-540.60	.00
9 CHO	505.70	9999.99	9999.99	9999.99	-404.80	-340.20	232.70	9999.99
10 CC00	114.80	269.30	85.84	-170.00	245.40	249.60	9999.98	853.60
11 CH2O	83.36	76.44	52.13	65.69	237.70	339.70	-314.70	9999.99
12 CNH2	-30.48	794.00	-44.85	9999.99	-164.00	-481.70	-330.40	9999.99
13 CNH	65.39	-41.32	-22.31	223.00	150.00	-500.40	-448.20	9999.99
14 ACNH2	5339.00	9999.99	650.40	979.80	529.00	5.18	-339.50	9999.99
15 CCN	24.82	34.78	-22.97	-138.40	185.40	157.80	242.80	9999.99
16 COOH	315.30	349.20	62.30	268.20	-151.00	1020.00	-66.17	9999.99
17 CCL	91.46	-24.36	4.68	122.90	562.20	529.00	698.20	9999.99
18 CCL2	34.01	-52.71	121.30	9999.99	747.70	669.90	708.70	9999.99
19 CCL3	36.70	-185.10	288.50	33.61	742.10	649.10	826.80	9999.99
20 CCL4	-78.45	-239.70	-4.70	134.70	856.30	860.10	1201.00	1616.00
21 ACCL	-141.30	-203.20	-237.70	375.70	246.90	661.60	920.40	9999.99
22 CN02	-32.69	-49.92	10.38	-97.05	341.70	252.60	417.90	9999.99
23 ACN02	5541.00	9999.99	1825.00	-127.80	561.60	9999.99	360.70	9999.99
24 (C3)N	-83.98	-188.00	-223.90	-109.90	28.60	-406.80	-598.80	9999.99
25 HC00	90.49	91.65	9999.99	9999.99	191.20	155.70	9999.99	9999.99
26 I	128.00	9999.99	58.68	9999.99	501.30	9999.99	9999.99	9999.99
27 BR	-31.52	9999.99	155.60	291.10	721.90	9999.99	9999.99	9999.99
28 CH3SH	-7.48	9999.99	28.41	9999.99	461.60	382.80	9999.99	9999.99
29 FURFURAL	-25.31	9999.99	157.30	404.30	521.60	9999.99	23.48	9999.99
30 PYRIDINE	-101.60	9999.99	31.87	49.80	-132.20	-378.20	-332.90	-222.20
31 DOH	140.00	9999.99	221.40	150.60	267.60	9999.99	.00	523.00
32 CH2CO	26.76	-89.92	140.10	365.80	164.50	108.70	472.50	9999.99
33 CS2	-52.65	16.62	21.50	40.68	823.50	914.20	1081.00	9999.99
34 C C	-72.88	-184.40	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99
35 ME2SO	50.49	9999.99	-2.50	-143.20	-25.87	695.00	-240.00	9999.99
36 ACRY	-165.90	9999.99	9999.99	9999.99	9999.99	9999.99	386.60	9999.99
37 CLCC	41.90	-3.17	-75.67	9999.99	540.90	726.70	9999.99	9999.99
38 ACF	-5.13	9999.99	-237.20	-157.30	649.70	645.90	9999.99	9999.99
39 DMF	-31.95	37.70	-133.90	-240.20	64.16	172.20	-287.10	9999.99
40 CF2	147.30	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99

... Continued

TABLE C.4 Continued

GROUP	33	34	35	36	37	38	39	40
1 CH2	153.60	298.90	526.50	689.00	-0.51	125.80	485.30	-2.86
2 C=C	76.30	523.60	9999.99	9999.99	237.30	9999.99	320.40	9999.99
3 ACH	52.07	9999.99	169.90	9999.99	69.11	389.30	245.60	9999.99
4 ACCH2	-9.45	9999.99	4284.00	9999.99	9999.99	101.40	5629.00	9999.99
5 OH	477.00	9999.99	-202.10	9999.99	253.90	44.78	-143.90	9999.99
6 CH3OH	-31.09	9999.99	-399.30	9999.99	-21.22	-48.25	-172.40	9999.99
7 H2O	887.10	9999.99	-139.00	160.80	9999.99	9999.99	319.00	9999.99
8 ACOH	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99
9 CHO	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99
10 CC00	183.00	9999.99	52.08	9999.99	-23.30	9999.99	9999.99	9999.99
11 CH2O	140.90	9999.99	172.10	9999.99	145.60	9999.99	254.80	9999.99
12 CNH2	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99
13 CNH	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99
14 ACNH2	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	-293.10	9999.99
15 CCN	230.90	-203.00	9999.99	81.57	-19.14	9999.99	9999.99	9999.99
16 COOH	9999.99	9999.99	9999.99	9999.99	-90.87	9999.99	9999.99	9999.99
17 CCL	450.10	9999.99	9999.99	9999.99	-58.77	9999.99	9999.99	9999.99
18 CCL2	9999.99	9999.99	215.00	9999.99	9999.99	9999.99	9999.99	9999.99
19 CCL3	116.60	9999.99	363.70	9999.99	-79.54	9999.99	9999.99	9999.99
20 CCL4	132.20	9999.99	337.70	9999.99	-86.85	215.20	498.60	9999.99
21 ACCL	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99
22 CN02	9999.99	-27.70	9999.99	9999.99	48.40	9999.99	9999.99	9999.99
23 ACN02	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99
24 (C3)N	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99
25 HCOO	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99
26 I	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99
27 BR	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99
28 CH3SH	9999.99	9999.99	31.66	9999.99	9999.99	9999.99	76.92	9999.99
29 FURFURAL	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99
30 PYRIDINE	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99
31 DOH	9999.99	9999.99	-417.20	9999.99	9999.99	9999.99	302.20	9999.99
32 CH2CO	216.10	-246.60	-44.58	9999.99	-44.42	9999.99	-61.70	9999.99
33 CS2	0.00	9999.99	9999.99	9999.99	-47.37	9999.99	9999.99	9999.99
34 C C	9999.99	0.00	9999.99	9999.99	9999.99	9999.99	-119.80	9999.99
35 ME2SO	9999.99	9999.99	0.00	9999.99	9999.99	9999.99	-97.71	9999.99
36 ACRY	9999.99	9999.99	9999.99	0.00	9999.99	9999.99	9999.99	9999.99
37 CLCC	167.90	9999.99	9999.99	9999.99	0.00	9999.99	9999.99	9999.99
38 ACF	9999.99	9999.99	9999.99	9999.99	9999.99	0.00	9999.99	9999.99
39 DMF	9999.99	6.70	136.60	9999.99	9999.99	9999.99	0.00	9999.99
40 CF2	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	9999.99	0.00

* 9999.99=NOT AVAILABLE

TABLE C.5 Peng-Robinson Interaction Parameters

COMPONENT 1	COMPONENT 2	DEL(1,2)
WATER	METHANE	0.500
WATER	ETHANE	0.500
WATER	PROPANE	0.480
WATER	N-BUTANE	0.480
WATER	N-PENTANE	0.480
WATER	N-HEXANE	0.480
WATER	N-OCTANE	0.480
WATER	1-BUTENE	0.380

APPENDIX D

A SAMPLE OUTPUT OF MAIN PROGRAM VLENC

In this chapter, a sample of interactive use of VLENC is given for acetone-methanol-water ternary system for one data point.

WHAT TYPE OF CALCULATION DO YOU NEED
(DEWT, 90 T, DEWP, BUBP)

BUBT

ENTER THE NUMBER OF DATA POINTS

1

ENTER THE NUMBER OF COMPONENTS

3

ARE THE MLE FRACTIONS STORED IN FILE "DATA" OR
WILL BE GIVEN INTERACTIVELY

IF THEY ARE IN "DATA" ENTER " 5 " OTHERWISE " 1 "

1

***** COMPONENT NAMES *****

THE NAMES ARE LISTED ACCORDING TO INCREASE
IN THE NUMBER OF CARBON ATOMS IN COMPONENTS

ENTER -T- TO SEE COMPONENTS OTHERWISE ENTER -GO-
TABLE

HYDROGEN	NITROGEN
OXYGEN	CARBON MONOXIDE
ARGON	METHANE
CARBON TETRACHLORIDE	CHLOROFORM
DICHLOROMETHANE	FORMIC ACID
NITRO-METHANE	METHANOL
CARBON DIOXIDE	CARBON DISULFIDE
TRICHLOROETHYLENE	ACETYLENE
ACETONITRILE	ETHYLENE
1,2-DICHLOROETHANE	ACETALDEHYDE
ACETIC ACID	ETHYL IODIDE
NITROETHANE	ETHANE
ETHANOL	DIMETHYL AMINE
ETHYLENE GLYCOL	PROPYLENE
ACETONE	METHYL ACETATE
PROPIONIC ACID	1-NITROPROPANE
PROPANE	N-PROPANOL
1-PROPANOL	TRIMETHYLAMINE
BUTENE-1	2-BUTANONE
TETRAHYDROFURAN	DIOXANE

ENTER -G- TO SEE THE OTHERS OTHERWISE ENTER -OKEY-
GO

ETHYL ACETATE	N-BUTANE
1-BUTANE	N-BUTANOL
1-BUTANOL	SEC-BUTANOL
TERT-BUTANOL	DI-ETHYL ETHER
DIETHYL AMINE	FURFURAL
PYRIDINE	ISOPRENE
CYCLOPENTANE	ISOPENTANE
4-PENTANE	CHLOROBENZENE
NITRO-BENZENE	BENZENE
PHENOL	ANILINE
CYCLOHEXANONE	CYCLOHEXANE
HEXENE-1	METHYLCYCLOPENTANE
CYCLOHEXANOL	METHYLISOBUTYLKETONE
N-BUTYL ACETATE	N-HEXANE
2,3-DIMETHYL BUTANE	TRIETHYLAMINE
TOLUENE	METHYL CYCLOHEXANE
4-HEPTANE	STYRENE
ETHYL BENZENE	METHYLENE

METHYL BENZENE
 O-XYLENE
 N-OCTANE

METHYLENE
 P-XYLENE
 2,2,4-TRIMETHYLPENTANE

 ENTER -GO- TO SEE THE OTHERS OTHERWISE ENTER -OKEY-
 GO

 N-DECANE
 HYDROGEN CHLORIDE
 HYDROGEN SULFIDE
 SULFUR DIOXIDE
 ACRYLONITRILE

N-HEXADECANE
 WATER
 AMMONIA
 ANISOLE
 VINYL ACETATE

 ENTER THE NAME OF COMPONENT 1
 ACETONE
 ENTER THE NAME OF COMPONENT 2
 METHANOL
 ENTER THE NAME OF COMPONENT 3
 WATER

CHOOSE ONE OF THE EQUATIONS FOR LIQUID PHASE NONIDEALITY

1.UNIFAC 2.UNIQUAC 3.RAOULT 4.MODUNIFAC

ENTER THE NAME OF THE EQUATION
 UNIQUAC
 TC(1)= 518.1 PC(1)= 46.4 ZAR(1)= .247
 TC(2)= 512.6 PC(2)= 79.9 ZAR(2)= .2318
 TC(3)= 617.3 PC(3)= 217.6 ZAR(3)= .238

NAME(1)= ACETONE
 R= 2.57 = 2.34 QP= 2.34

PU(1 2)= 359.1
 PU(1 3)= 466.36
 NAME(2)= ETHANOL
 PJ(2 1)= -96.9
 PJ(2 3)= -50.82

NAME(3)= WATER
 PU(3 1)= -56.91
 PJ(3 2)= 148.27

PROGRAM TARTS ITERATION FOR BUBBLET CALCULATION

ENTER PRESSURE (IN ATM OR MM HG)
 ENTER UNIT OF THE PRESSURE (ATM OR MM HG)

1. ATM
 ENTER LIQUID MOLE FRACTION(X) OF ACETONE AT DATA 1

.2
 ENTER LIQUID MOLE FRACTION(X) OF METHANOL AT DATA 1

.2
 ENTER EXPERIMENTAL VALUE OF VAPOUR MOLE FRACTION
 OF ACETONE IF AVAILABLE, IF NOT ENTER 0

.6
 ENTER EXPERIMENTAL VALUE OF VAPOUR MOLE FRACTION
 OF METHANOL IF AVAILABLE, IF NOT ENTER 0

.23
 ENTER EXPERIMENTAL VALUE OF TEMPERATURE (IN K OR C OR F)
 IF IT IS NOT AVAILABLE ENTER 0

(TEMPERATURES FOR ALL DATA POINTS MUST HAVE SAME UNIT)

ENTER UNIT OF THE TEMPERATURE (K OR F OR C)
 337.95 K
 T= 321.3718604402
 T= 334.808617404
 T= 335.587361381
 T= 335.516244905

NUMBER OF DATA POINTS=1

DO YOU WANT THE LIST OF THE UNIQAC PARAMETERS OF THAT SYSTEM (YES OR NO) ?

THEY WILL BE LISTED IN FILE "ERESULT".
NO

DO YOU WANT CALCULATION WITH A DIFFERENT EQUATION FROM UNIQAC USING SAME SYSTEM AND DATA YOU HAVE GIVEN (YES OR NO)
YES

1. UNIFAC 2. UNIQAC 3. RAULT 4. MODUNIFAC

ENTER THE NAME

UNIFAC

TC(1)= 578.1 PC(1)= 46.4 ZAR(1)= .247

TC(2)= 512.6 PC(2)= 79.9 ZAR(2)= .2318

TC(3)= 617.3 PC(3)= 217.6 ZAR(3)= .238

THE UNIFAC METHOD NEEDS FUNCTIONAL GROUPS OF COMPOUNDS
THE CHOICE OF POSSIBLE GROUPS IS ARBITRARY AND LIMITED
WITH THE FOLLOWING GROUPS

CH3	CH2	CH	CH2=CHCH=CH	CH=C	CH2=C	ACH	AC	ACCH3		
ACCH3	ACH2	ACCH	OH	CH3OH	H2O	ACOH	CHO	CH3COOCH2COOCH3O		
CH3O	CH-O	FCH2O	CH3NH2	CH2NH2	CHNH2	CH3NH	CH2NH	CHNH	ACNH2	
ACNH2	CH3CN	CH2CN	COOH	HC00H	CH2CL	CHCL	CCL	CH2CL2	CHCL2	CCL2
CCL2	CH L3	CCL3	CCL4	ACCL	CH3NO2	CH2NO2	CHNO2	ACNO2	CH3N	CH2N
CH2N	HC00	I	BR	CH3SH	FURFURPYRID	DOH	CO	NH	CL	
CL	CH CO	CH2CO	C							

ENTER THE NAME OF UNIFAC GROUPS IN COMPONENT ACETONE

CH3CO

ENTER THE NUMBER OF GROUPS OF THIS KIND

1

ENTER THE NAME OF UNIFAC GROUPS IN COMPONENT ACETONE

CH3

ENTER THE NUMBER OF GROUPS OF THIS KIND

1

ENTER THE NAME OF UNIFAC GROUPS IN COMPONENT ACETONE

END

THE UNIFAC METHOD NEEDS FUNCTIONAL GROUPS OF COMPOUNDS
THE CHOICE OF POSSIBLE GROUPS IS ARBITRARY AND LIMITED
WITH THE FOLLOWING GROUPS

CH3	CH2	CH	CH2=CHCH=CH	CH=C	CH2=C	ACH	AC	ACCH3		
ACCH3	ACH2	ACCH	OH	CH3OH	H2O	ACOH	CHO	CH3COOCH2COOCH3O		
CH3O	CH2O	CH-O	FCH2O	CH3NH2	CH2NH2	CHNH2	CH3NH	CH2NH	CHNH	ACNH2
ACNH2	CH3CN	CH2CN	COOH	HC00H	CH2CL	CHCL	CCL	CH2CL2	CHCL2	CCL2
CCL2	CH L3	CCL3	CCL4	ACCL	CH3NO2	CH2NO2	CHNO2	ACNO2	CH3N	CH2N
CH2N	HC00	I	BR	CH3SH	FURFURPYRID	DOH	CO	NH	CL	
CL	CH CO	CH2CO	C							

ENTER THE NAME OF UNIFAC GROUPS IN COMPONENT METHANOL

CH3OH

ENTER THE NUMBER OF GROUPS OF THIS KIND

1

ENTER THE NAME OF UNIFAC GROUPS IN COMPONENT METHANOL

END

THE UNIFAC METHOD NEEDS FUNCTIONAL GROUPS OF COMPOUNDS
THE CHOICE OF POSSIBLE GROUPS IS ARBITRARY AND LIMITED
WITH THE FOLLOWING GROUPS

CH3	CH2	CH	CH2=CHCH=CH	CH=C	CH2=C	ACH	AC	ACCH3		
ACCH3	ACH2	ACCH	OH	CH3OH	H2O	ACOH	CHO	CH3COOCH2COOCH3O		
CH3O	CH2O	CH-O	FCH2O	CH3NH2	CH2NH2	CHNH2	CH3NH	CH2NH	CHNH	ACNH2
ACNH2	CH3CN	CH2CN	COOH	HC00H	CH2CL	CHCL	CCL	CH2CL2	CHCL2	CCL2
CCL2	CH L3	CCL3	CCL4	ACCL	CH3NO2	CH2NO2	CHNO2	ACNO2	CH3N	CH2N
CH2N	HC00	I	BR	CH3SH	FURFURPYRID	DOH	CO	NH	CL	
CL	CH CO	CH2CO	C							

```

ACCH3 ACNH2 ACCH OH CH3OH H2O ACCH CH3 CH3COOCH2COOCH3
CH3O CH2O CH-O FCH2O CH3NH2CH2NH2CHNH2 CH3NH CH2NH CHNH ACNH2
ACNH2 CHCN CH2CN COOH HCOOH CH2CL CHCL CCL CH2CL2CHCL2 CCL2
CCL2 CHCL3 CCL3 CCL4 ACCL CH3NO2CH2NO2CHNO2 ACNO2 CH3N CH2N
CH2N HCO I BR CH3SH FURFURPYRID DOH CO NH CL
CL CH CO CH2CO C

```

```

-----
ENTER THE NAME OF UNIFAC GROUPS IN COMPONENT WATER
H2O
ENTER THE NUMBER OF GROUPS OF THIS KIND
1
ENTER THE NAME OF UNIFAC GROUPS IN COMPONENT WATER
END

```

```

TABLE(1 1 1 1)= 0.
TABLE(1 1 1 2)= 26.76
TABLE(1 2 1)= 108.7
TABLE(1 3 1)= 472.5
TABLE(1 1 1)= 476.4
TABLE(1 1 2)= 0.
TABLE(1 2 1)= 697.2
TABLE(1 2 3 1)= 1318.
TABLE(2 1 1 1)= 23.39
TABLE(2 1 2)= 16.51
TABLE(2 1 2 1)= 0.
TABLE(2 1 3 1)= -181.
TABLE(3 1 1)= -195.4
TABLE(3 1 1 2)= 300.
TABLE(3 1 2 1)= 289.6
TABLE(3 3 1)= 0.

```

PROGRAM STARTS ITERATION FOR BUBBLET CALCULATION

```

*****
T= 325.9188802877
T= 333.2714743085
T= 338.8 81975718
T= 338.8574503988
NUMBER OF DATA POINTS=1

```

DO YOU WANT THE LIST OF THE UNIFAC PARAMETERS OF THAT SYSTEM (YES OR NO) ?

THEY WILL BE LISTED IN FILE "ERESULT".
NO

DO YOU WANT CALCULATION WITH A DIFFERENT EQUATION FROM UNIFAC USING SAME SYSTEM AND DATA YOU HAVE GIVEN(YES OR NO)
YES

- 1.UNIFAC 2.UNIQUAC 3.RAOULT 4.MODUNIFAC

ENTER THE NAME

```

RAOULT
TC(1)= 578.1 PC(1)= 46.4 ZAR(1)= .247
TC(2)= 512.6 PC(2)= 79.9 ZAR(2)= .2318
TC(3)= 647.3 PC(3)= 217.6 ZAR(3)= .238

```

PROGRAM TARTS ITERATION FOR BUBBLET CALCULATION

```

*****
T= 343.4 84870944
T= 350.2 12763293
T= 350.4423706407
T= 350.4 29109649
NUMBER OF DATA POINTS=1

```

DO YOU WANT CALCULATION WITH A DIFFERENT EQUATION FROM

DO YOU WANT CALCULATION WITH A DIFFERENT EQUATION FROM
 RAOULT USING SAME SYSTEM AND DATA YOU HAVE GIVEN(YES OR NO)
 NO

DO YOU NEED ANOTHER CALCULATION (YES,NO)
 NO

 THE RESULTS OF THE CALCULATION(S) ARE STORED
 IN THE FILE "ERESULT"

THE RESULTS OF THE ITERATIONS IN THE CALCULATIONS
 ARE STORED IN THE FILE "PUTPUT"

ABLEC) VLE CALCULATION RESULTS

1.ACETONE 2.METHANOL 3.WATER

TYPE: BUBT

LIQUID PHASE NONIDEALITY IS CALCULATED BY UNIQUAC EQUATION
 VAPOUR PHASE NONIDEALITY IS CALCULATED BY PENG ROBINSON EQUATION

PRESSURE= 1.000 ATM

DATA	COMP	GIVEN			CALCULATED				
		X	YE	TE	T	GAMA	FHI	Y	EX
1	1	.2000	.6000	337.95	336.51	2.3595	.9743	.5911	-1.43
	2	.2000	.2300			1.2134	.9827	.2318	.79
	3	.6000	.1700			1.2780	.9911	.1770	4.13

ERROR ON Y(1)= ABS(Y(1)-YE(1))/DATA POINTS= .0089

ERROR ON Y(2)= ABS(Y(2)-YE(2))/DATA POINTS= .0013

ERROR ON Y(3)= ABS(Y(3)-YE(3))/DATA POINTS= .0070

ERROR ON TEMPERATURE= ABS(T-TE)/DATA POINTS= 1.4438

TABLEC) VLE CALCULATION RESULTS

1.AC TONE 2.METHANOL 3.WATER

TYPE: BUBT

LIQUID PHASE NONIDEALITY IS CALCULATED BY UNIFAC EQUATION
 VAPOUR PHASE NONIDEALITY IS CALCULATED BY PENG ROBINSON EQUATION

PRESSURE= 1.000 ATM

DATA	COMP	GIVEN			CALCULATED				
		X	YE	TE	T	GAMA	FHI	Y	EX
1	1	.2000	.6000	337.95	339.86	2.0370	.9743	.5652	-5.63
	2	.2000	.2300			1.0491	.9830	.2281	-.84
	3	.6000	.1700			1.2789	.9911	.2057	21.02

ERROR ON Y(1)= ABS(Y(1)-YE(1))/DATA POINTS= .0333

ERROR ON Y(2)= ABS(Y(2)-YE(2))/DATA POINTS= .0019

 ERROR ON Y(3)= ABS(Y(3)-YE(3))/DATA POINTS= .0757

ERROR ON T(3) = ABS(T(3)-TE(3))/DATA POINTS= .0557
 ERROR ON TEMPERATURE = ABS(T-TE)/DATA POINTS= 1.9075

TABLE() VLE CALCULATION RESULTS

1. ACETONE 2. METHANOL 3. WATER

TYPE: BUBT

CALCULATIONS ARE PERFORMED BY RAULT'S LAW

PRESSURE= 1.000 ATM

DATA	COMP	GIVEN			CALCULATED				
		X	YE	TE	T	GAMA	FHI	Y	EX
1	1	.2000	.6000	337.95	351.44	1.0000	1.0000	.4021	-32.98
	2	.2000	.2300			1.0000	1.0000	.3362	46.19
	3	.6000	.1700			1.0000	1.0000	.2617	53.93

ERROR ON Y(1) = ABS(Y(1)-YE(1))/DATA POINTS= .1979

ERROR ON Y(2) = ABS(Y(2)-YE(2))/DATA POINTS= .1062

ERROR ON Y(3) = ABS(Y(3)-YE(3))/DATA POINTS= .0917

ERROR ON TEMPERATURE = ABS(T-TE)/DATA POINTS= 13.4929

 17.45.09.0CLP, BU, P03 / 0.39KLNS.

APPENDIX E

DESCRIPTION AND LISTING OF VLENC AND ITS SUBROUTINES

1. Main Program VLENC

Interactively designed program VLENC organizes the relationship among subroutines. It interactively reads the system's components, the type of calculations and options for liquid phase nonideality calculations. Next, calling subroutine INPUT, it transfers the pure component and binary interaction parameters to the subroutines of interest. For liquid phase nonideality, it has mainly three options, UNIFAC, UNIQUAC and modified UNIFAC. It is also able to make predictions with Raoult's law. VLENC has the ability to reperform the calculations with different equations representing the liquid phase nonideality, without reentering the input data.

2. Subroutines DEWT, BUB T, DEWP and BUBP

These four subroutines perform dew point temperature, bubble point temperature, dew point pressure and bubble point pressure calculations using the calculational methods described

in Chapter 3. They interactively read required mole fractions, pressure of temperature and, if available, the experimental values of unknown variables. The pure component and interaction parameters of the system in interest are transferred through the main program. Then, these subroutines calculate unknown mole fractions and temperature or pressure by calling subroutines VAPS, CONST, FUGAC, RFUGAC, UNIQUAC or UNIFAC. At the end of the calculations, they find percentage errors and absolute mean deviations between predicted and experimental values of unknown variables.

3. Subroutien VAPS

It calculates saturated vapor pressures by using Antoine Equation as it is given in Appendix A.1.

4. Subroutine CONST

CONST calculates the parameters of Peng-Robinson Equation required for both in FUGAC and RFUGAC subroutines. If experimental data are not available for acentric factor, it calls function ACEF in order to obtain a predicted value.

5. Subroutine FUGAC

It finds the fugacity coefficient of the component in interest by substituting compressibility factor Z , obtained from subroutine ROOT into Eq. (2.35).

6. Subroutine RFUGAC

It calculates saturated fugacity coefficient for pure component using Eq.(2.34) by calling subroutine ROOT to calculate compressibility factor Z , of that component.

7. Subroutine UNIQUAC

It uses Eq.(2.60) for condensable component activity coefficient. For a noncondensable component, it calls subroutine RFUGNC and uses Eq.(2.63).

8. Subroutine UNIFAC

It finds UNIFAC activity coefficients using Eqs.(2.68)-(2.76). It is not able to calculate activity coefficients of noncondensable components. This subroutine is also able to find the activity coefficients of modified UNIFAC equation, whenever interaction parameters are available.

9. Subroutine LMV

It finds liquid molar volumes using modified Rackett Equation as given in Appendix A.2.

10. Subroutine INPUT

It reads and loads physical properties of the components in file YDATAPP, UNIQUAC parameters in file YDATAUQ, and UNIFAC parameters in file YDATUM. It chooses the parameters of the system of interest by comparing the names of the components with the names given in data files.

11. Subroutine OUT

It prints the names of components, the system conditions and UNIQUAC or UNIFAC parameters of the system in interest.

12. Subroutine ROOT

It finds compressibility factor Z in Eq.(2.23) both for the mixture and for pure components using Newton-Raphson iteration method.

13. Subroutine RFUGNC

It finds the hypothetical standard state fugacity for noncondensable components from Eq.(2.65)

14. Subroutine ACEF

Subroutine ACEF, finds the acentric factor of a component,

which is not available in the data YDATAPP, by using the equation given in Appendix A.3.

15. Subroutine FINDR

It finds the code number of the UNIFAC group in interest in data file YDATUM.

The Main Variables Used in the Programs

ANTA, ANTB, ANTC Constants of Antoine equation

DEL Peng-Robinson interaction parameter

FHI Fugacity coefficient of a component in solution.

FHS Saturation fugacity coefficient of a pure component

GAMA Activity coefficient.

HC Henry's constant.

N Number of data points

NN Number of components

OMEGA Acentric factor

P Pressure

PC Critical pressure

PS Saturation vapor pressure

PU UNIQUAC energy interaction parameter

QX UNIQUAC surface parameter in combinatorial part

QPX UNIQUAC surface parameter in residual part.

QB UNIFAC group surface parameter

RX UNIQUAC volume parameter

RB UNIFAC group volume parameter

T	Temperature
TABLE	UNIFAC group interaction parameter
TC	Critical temperature
VL	Liquid molar volume
X	Liquid mole fraction
XE	Experimental liquid mole fraction
Y	Vapor mole fraction
YE	Experimental mole fraction
Z	Compressibility factor
ZAR	Rackett equation parameter

```
PROGRAM VLE (OUTPJT, DATA, YDATAPP, YDATAU2, YDATUM, ERESULT, YLIST, PUTPUT, INPUT,
+TAPE2=YDATAPP, TAPE3=YDATAUQ, TAPE4=YDATUM, TAPE6=ERESULT, TAPE8=YLIST, TAPE1=
+PUTPUT, TAPE5=DATA, TAPE7=INPUT)
```

```
C
C
C  VAPOUR-LIQUID EQUILIBRIUM CALCULATIONS
```

```
PARAMETER (K=9)
PARAMETER (MMR=4)
DIMENSION RQ(63,2), DEL(K,K), ZAR(K), COMP(53)
DIMENSION ANTA(K), ANTB(K), ANTC(K)
COMMON/CONV/ TC(K), PC(K), OMEGA(K)
COMMON/UNIQ/ R(K), Q(K), QP(K), PJ(K,K)
COMMON/UNIFAC1/RB(K,MMR), QB(K,MMR), TABLE(63,63), KONT(K)
COMMON/UNIFAC2/ITAB(K,MMR), KQR(K,MMR), MNR(K)
COMMON NAME(K), LFED, TYPE
CHARACTER*6 COMP
CHARACTER*35 COMN1, COMN2
CHARACTER*20 NAME
CHARACTER*9 LFED, TYPE, RDEC, DEC, HR, PTD
```

```
C
C
C  INTERACTIVE DATA INPUT SECTION
```

```
55 RD=0
   INFR=0
   NRA=0
   PRINT*, 'WHAT TYPE OF CALCULATION DO YOU NEED'
   PRINT*, '(DEWT, BUBT, DEWP, BUBP)'
   READ(*, 1) TYPE
   PRINT*, TYPE
1  FORMAT(A)
   PRINT*, 'ENTER THE NUMBER OF DATA POINTS'
   READ*, N
   PRINT*, N
   PRINT*, 'ENTER THE NUMBER OF COMPONENTS'
   READ*, NN
   PRINT*, NN
   PRINT*, 'ARE THE MOLE FRACTIONS STORED IN FILE "DATA" OR '
   PRINT*, 'WILL BE GIVEN INTERACTIVELY'
   PRINT*, ' '
   PRINT*, 'IF THEY ARE IN "DATA" ENTER " 5 " OTHERWISE " 7 "'
   READ*, IOD
   PRINT*, ' '
   PRINT*, IOD
   CALL PF('GET', 'YLIST')
   PRINT*, '***** COMPONENT NAMES *****'
   PRINT*, ' '
   PRINT*, 'THE NAMES ARE LISTED ACCORDING TO INCREASE '
   PRINT*, 'IN THE NUMBER OF CARBON ATOMS IN COMPONENTS '
   PRINT*, ' '
   PRINT*, 'ENTER -TABLE- TO SEE COMPONENTS OTHERWISE ENTER-GO-'
   READ(*, 1) HR
   PRINT*, HR
   IF(HR.EQ.'GO') GO TO 485
   WRITE(*, 445)
   READ(8, *) TC1
   DO 195 I=1, TC1
   READ(8, 12) COMN1, COMN2
   WRITE(*, 12) COMN1, COMN2
   AAA=I/20.0
   JIK=I/20
   IF(JIK.NE.AAA) GO TO 195
```

```

WRITE(*,445)
PRINT*, 'ENTER -GO- TO SEE THE OTHERS OTHERWISE ENTER -OKEY-'
READ(*,1) HR
PRINT*, HR
IF(HR.EQ.'OKEY')GO TO 485
DO 25 J=1,3
25 PRINT*, '
WRITE(*,445)
195 CONTINUE
12 FORMAT(2(A35))
WRITE(*,445)
445 FORMAT(76('-',))
485 DO 200 I=1, NN
PRINT*, 'ENTER THE NAME OF COMPONENT ', I
READ(*,1) NAME(I)
PRINT*, NAME(I)
200 CONTINUE
PRINT*, ' '
PRINT*, 'CHOOSE ONE OF THE EQUATIONS FOR LIQUID PHASE NONIDEALITY'
PRINT*, '
PRINT*, '1.UNIFAC 2.UNIQUAC 3.RAOJLT 4.MODUNIFAC '
PRINT*, '
PRINT*, 'ENTER THE NAME OF THE EQUATION
READ(*,1) LFD
PRINT*, LFD
175 IF(LFD.EQ.'UNIFAC'.OR.LFD.EQ.'MODUNIFAC')GO TO 24
IF(LFD.EQ.'RAOULT') GO TO 28
LFD=1
GO TO 152
24 LFD=2
MU=0
IF(LFD.EQ.'MODUNIFAC')MU=1
GO TO 152
28 LFD=3
C
C READ THE REQUIRED DATA BY CALLING SUBROUTINE INPUT
C
152 CALL INPUT(ANTA,ANTB,ANTC,ZAR,DEL,LFD,NN,SCN,NRA,COMP)
C
C CHOOSE ONE OF THE OPTIONS
C
IF(LFD.EQ.2.AND.LFD.NE.'MODUNIFAC')LFD='UNIFAC'
IF(TYPE.EQ.'DEWT')GO TO 3
IF(TYPE.EQ.'BUBT')GO TO 4
IF(TYPE.EQ.'BUBP')GO TO 5
IF(TYPE.EQ.'DEWP')GO TO 7
PRINT*, 'THE NAME FOR CALCULATION IS WRONG,ENTER AGAIN'
GO TO 55
7 CALL DEWP(N,NN,ANTA,ANTB,ANTC,DEL,LFD,ZAR,RD,MU,IOD,COMP)
GO TO 50
3 CALL DEWT(N,NN,ANTA,ANTB,ANTC,DEL,LFD,ZAR,RD,MU,IOD,COMP)
GO TO 50
4 CALL BUBT(N,NN,ANTA,ANTB,ANTC,DEL,LFD,ZAR,RD,MU,IOD,COMP)
GO TO 50
5 CALL BUBP(N,NN,ANTA,ANTB,ANTC,DEL,LFD,ZAR,RD,MU,IOD,COMP)
50 IF(LFD.EQ.'RAOULT') GO TO 350
PRINT*, ' '
PRINT*, 'DO YOU WANT THE LIST OF THE ', LFD, 'PARAMETERS OF THAT'
PRINT*, 'SYSTEM (YES OR NO) ? '
PRINT*, ' '
PRINT*, 'THEY WILL BE LISTED IN FILE "ERESULT".'
READ(*,1)PTD
PRINT*,PTD
IF(PTD.EQ.'YES')CALL OUT(NN,1,COMP)
350 IF(LFD.EQ.'RAOULT')WRITE(6,5555)
5555 FORMAT(/,80('-',),/,80('-',))

```

```

112 IF(INFR.EQ.5)GO 10 49
PRINT*, ' '
PRINT*, ' '
PRINT*, ' '
PRINT*, 'DO YOU WANT CALCULATION WITH A DIFFERENT EQUATION FROM '
PRINT*, LFED, ' USING SAME SYSTEM AND DATA YOU HAVE GIVEN(YES OR NO)'
READ(*,1) RDEC
PRINT*, RDEC
IF(RDEC.EQ.'NO')GO TO 49
IF(LFED.EQ.'UNIFAC'.OR.LFED.EQ.'MODUNIFAC')NRA=1
PRINT*, ' '
PRINT*, ' 1.UNIFAC 2.UNIQUAC 3.RAULT 4.MODUNIFAC
PRINT*, ' '
PRINT*, ' ENTER THE NAME'
READ(*,1) LFED
PRINT*, LFED
RD=1
INFR=INFR+1
GO TO 175
49 PRINT*, ' '
PRINT*, 'DO YOU NEED ANOTHER CALCULATION (YES,NO)'
READ(*,1) DEC
PRINT*, DEC
IF(DEC.EQ.'NO') GO TO 555
GO TO 55
555 PRINT*, '-----'
PRINT*, 'THE RESULTS OF THE CALCULATION(S) ARE STORED'
PRINT*, 'IN THE FILE "ERESULT" '
PRINT*, ' '
PRINT*, 'THE RESULTS OF THE ITERATIONS IN THE CALCULATIONS'
PRINT*, 'ARE STORED IN THE FILE "PUTPUT"'
PRINT*, '-----'
STOP
END

C-----
C
SUBROUTINE DEWT(N,NN,ANTA,ANTB,ANTC,DEL,LFED,ZAR,RD,MU,IOD,COMP)
C-----
C
PARAMETER(K=9)
PARAMETER(MMR=4)
DIMENSION XU(K),XQ(K),GAMA(K),RQ(63,2),ZAR(K),VL(K),COMP(63)
DIMENSION Y(K),XE(K),ANTA(K),ANTB(K),ANTC(K),HC(K),TE(100)
DIMENSION YA(K,100),XEA(K,100),XQO(K),YE(K),YEA(K,100),X(K)
DIMENSION A(K),B(K),Z(K),APR(K),BPR(K),XA(K,100),SED(K)
DIMENSION FIL(K),EY(K),EX(K),VK(K),CX(K),DEL(K,K),PS(K)
COMMON/CONV/ TC(K),PC(K),OMEGA(K)
COMMON/UNIQ/ R(K),Q(K),QP(K),PU(K,K)
COMMON/UNIFAC1/RB(K,MMR),QB(K,MMR),TABLE(63,63),KONT(K)
COMMON/UNIFAC2/ITAB(K,MMR),KQR(K,MMR),MNR(K)
COMMON/FUGV/APRM,BPRM,APRIJ(K,K),FHI(K)
COMMON/RFUGV/FHS(K)
COMMON NAME(K),LFED,TYPE
CHARACTER*6 CM1,PUI,TUI,COMP
CHARACTER*20 NAME
CHARACTER*9 LFED,TYPE

C-----
C
VAPOUR AND LIQUID DATA
C-----
PRINT*, 'PROGRAM STARTS ITERATION FOR DEWT CALCULATION'
PRINT*, '*****'
EPS=0.00001
DO 56 I=1,NN
56 WRITE(1,1)NAME(I)
WRITE(1,1)LFED
WRITE(1,*)

```

```

N1=N
IF(RD.EQ.1)GO TO 177
PRINT*, 'ENTER PRESSURE (IN ATM OR MM HG)'
READ(*,*) P
PRINT*, 'ENTER UNIT OF THE PRESSURE ("ATM" OR "MM HG")'
READ(*,1) PUI
1 FORMAT(A)
IF(PUI.EQ.'MM HG')P=P/760
PRINT*,P, ' ATM'
177 CALL OUT(NN,0,COMP)
WRITE(6,1001) P
DO 302 I=1,NN
302 SED(I)=0.0
SET=0.0
DO 212 M=1,N
SUMXX=0.0
SUMYY=0.0
IF(RD.EQ.1)GO TO 155
DO 112 I=1,NN-1
PRINT*, 'ENTER VAPOUR MOLE FRACTION(Y) OF ',NAME(I), 'AT DATA',M
READ(IOD,*) YA(I,M)
112 PRINT*,YA(I,M)
DO 114 I=1,NN-1
PRINT*, 'ENTER EXPERIMENTAL VALUE OF LIQUID MOLE FRACTION'
PRINT*, 'OF ',NAME(I), 'IF AVAILABLE,IF NOT ENTER 0'
READ(IOD,*) XEA(I,M)
PRINT*,XEA(I,M)
IF(XEA(I,M).EQ.0) GO TO 155
114 CONTINUE
PRINT*, 'ENTER EXPERIMENTAL VALUE OF TEMPERATURE (IN K OR F OR C)'
PRINT*, 'IF IT IS NOT AVAILABLE ENTER 0'
PRINT*, '(TEMPERATURES FOR ALL DATA POINTS MUST HAVE SAME UNIT)'
READ(IOD,*) TE(M)
IF(M.GT.1) GO TO 123
PRINT*, 'ENTER UNIT OF THE TEMPERATURE(K OR F OR C)'
READ(IOD,1)TUI
123 IF(TUI.EQ.'F')TE(M)=(TE(M)+459.67)/1.8
IF(TUI.EQ.'C')TE(M)=TE(M)+273.15
PRINT*,TE(M), ' K'
155 DO 139 I=1,NN-1
Y(I)=YA(I,M)
XE(I)=XEA(I,M)
SUMYY=SUMYY+Y(I)
SUMXX=SUMXX+XE(I)
139 CONTINUE
Y(NN)=1.0-SUMYY
XE(NN)=1.0-SUMXX
IF(XEA(1,M).EQ.0.0)XE(NN)=0.0

C
C ITERATION FOR DEWT. CALCULATION
C
DO 2 I=1,NN
X(I)=Y(I)
2 CONTINUE
T=400
CR=82.057
TLL=100.
IRP=0
NNV=2
IN=0
103 IN=IN+1
RT=82.057+T
101 DO 149 J=1,NNV
IF(J.EQ.2)T=T+1
CALL VAPS(ANTA,ANTB,ANTC,T,PS,NN)
IF(LFD.EQ.3) GO TO 471

```

```

CALL CONST(A,B,APR,BPR,NN,T,P,CR,PS,ANIA,AYIB,ANIC)
CALL LMV(PC,TC,ZAR,VL,T,NN)
CALL RFUGAC(Z,A,B,NN,T)
CALL FUGAC(ZMIX,Y,APR,BPR,NN,T,P,CR,DEL)
GO TO (72,73),LFD
72 CALL UNIQAC(X,T,NN,GAMA,HC)
GO TO 75
73 CALL UNIFAC(X,NN,T,GAMA,MU)
75 SUMX=0.
DO 5 I=1,NN
PCL=EXP(VL(I)*(P-PS(I))/RT)
FIY=FHI(I)*P
FILMP=GAMA(I)*PS(I)*FHS(I)*PCL
IF(T/TC(I).GT.1.8)FILMP=HC(I)
IF(T/TC(I).GT.1.8)TLL=0.0
VK(I)=FILMP/FIY
CX(I)=Y(I)/VK(I)
SUMX=SUMX+CX(I)
5 CONTINUE
IF(SUMX.GT.10000.OR.SUMX.LT.0.00001)GO TO 414
GO TO 472

```

```

C
C DEW TEMPERATURE CALCULATION APPLYING RAOULT'S LAW
C

```

```

471 SUMX=0.0
DO 442 I=1,NN
CX(I)=Y(I)*P/PS(I)
442 SUMX=SUMX+CX(I)
C
472 IF(J.EQ.2)GO TO 147
FO=ALOG(SUMX)
GO TO 149
147 F1=ALOG(SUMX)
149 CONTINUE
DO 6 I=1,NN
X(I)=CX(I)/SUMX
6 CONTINUE

```

```

C
WRITE(1,*) IN,' SUMX= ',SUMX,' T= ',T
IF(IN.GT.250) GO TO 107
IF(ABS(F1).LE.EPS) GO TO 109
T=T-F1/(F1-FO)
T=T-1.
IF(T.LT.TLL.OR.T.GT.700) GO TO 414
GO TO 100
107 PRINT*,' NO SOLUTION FOR DEWT CALCULATION AT DATA ',M
NT=NT-1
GO TO 212

```

```

C
C PRINT OF THE RESULTS
C

```

```

414 IF(IRP.EQ.1)GO TO 107
IRP=1.0
T=300.
GO TO 100

```

```

C
109 WRITE(1,*) 'TEMPERATURE= ',T
DO 686 I=1,NN,2
685 WRITE(1,*) 'X(',I,')= ',X(I),' X(',I+1,')= ',X(I+1)
IF(LFD.NE.3) GO TO 127
DO 465 I=1,NN
FHI(I)=1.0
465 GAMA(I)=1.0
127 DO 296 I=1,NN
IF(XE(I).EQ.0.0) GO TO 236
295 SED(I)=SED(I)+ABS(X(I)-XE(I))
-----

```

```

235 IF(TE(M).EQ.0.0) GO TO 237
ET=ABS(TE(M)-T)
SET=SET+ET
237 DO 12 I=1,NN
IF(XE(I).EQ.0) GO TO 235
12 EX(I)=(X(I)-XE(I))/XE(I)*100
235 DO 24 I=1,NN
IF(I.NE.1) GO TO 22
WRITE(6,1005) M,I,Y(I),XE(I),TE(M),T,GAMA(I),FHI(I),X(I),EX(I)
GO TO 24
22 WRITE(6,1006) I,Y(I),XE(I),GAMA(I),FHI(I),X(I),EX(I)
24 CONTINUE
1000 FORMAT(12X,I2,'.',1X,A20)
1001 FORMAT(/,4X,'PPESSURE= ',F6.3,' ATM',//,17X,'GIVEN',33X,'CALCULATED'
+ //,11X,20('-'),3X,42('-'),//,'DATA',1X,'COMP',4X,
+ 'Y',5X,'XE',6X,'TE',7X,'T',9X,'GAMA',5X,'FHI',8X,'X',8X,'EX',//,79('*
1005 FORMAT(1X,I2,2X,I2,2X,F6.4,1X,F6.4,2X,F7.2,2X,F7.2,2X,F9.4,2X,F7.4
+ ,3X,F6.4,3X,F6.2)
1006 FORMAT(5X,I2,2X,F6.4,1X,F6.4,20X,F9.4,2X,F7.4,3X,F6.4,3X,F6.2)
212 CONTINUE
DO 396 I=1,NN
IF(NN.EQ.2.AND.I.EQ.2)GO TO 452
SED(I)=SED(I)/NT
IF(SED(I).EQ.0.0) GO TO 452
396 WRITE(6,1206) I,I,I,SED(I)
452 IF(SET.EQ.0.0) GO TO 1256
SET=SET/NT
PRINT*, 'THE NUMBER OF DATA POINTS= ',NT
WRITE(6,1207) SET
1206 FORMAT(/,15X,'ERROR ON X(',I1,')= ABS(X(',I1,')-XE(',I1,'))/'
+ , 'DATA POINTS= ',F7.4,1H1)
1207 FORMAT(/,15X,'ERROR ON T= ABS(TE-T)/DATA POINTS= ',F7.4,1H1)
1256 RETURN
END

```

C
C

```
-----
SUBROUTINE DEWP(N,NN,ANTA,ANTB,ANTC,DEL,LFED,ZAR,RD,MU,IOD,COMP)

```

C
C

```
-----
PARAMETER(K=9)
PARAMETER(MMR=4)
DIMENSION XU(K),XQ(K),GAMA(K),RQ(63,2),ZAR(K),VL(K),COMP(63)
DIMENSION Y(K),XE(K),ANTA(K),ANTB(K),ANTC(K),HC(K),PE(100)
DIMENSION YA(K,100),XEA(K,100),XQ(K),YE(K),YEA(K,100)
DIMENSION A(K),B(K),Z(K),APR(K),BPR(K),XA(K,100),X(K)
DIMENSION FIL(K),EY(K),EX(K),VK(K),CX(K),PS(K),SED(K)
COMMON/UNIQ/ R(K),Q(K),QP(K),PU(K,K)
COMMON/UNIFAC1/R3(K,MMR),QB(K,MMR),TABLE(63,63),KONT(K)
COMMON/UNIFAC2/ITAB(K,MMR),KQR(K,MMR),MNR(K)
COMMON/CONV/ TC(K),PC(K),OMEGA(K)
COMMON/FUGV/APRM,BPRM,APRIJ(K,K),FHI(K)
COMMON/RFUGV/FHS(K)
COMMON NAME(K),LFED,TYPE
CHARACTER*6 COMP,CM1,TUI,PUI
CHARACTER*20 NAME
CHARACTER*9 LFED,TYPE

```

C
C
C

```
VAPOUR AND LIQUID DATA

```

```

PRINT*, 'PROGRAM STARTS ITERATION FOR DEWP CALCULATION'
PRINT*, '*****'
EPS=0.000001
DO 56 I=1,NN
56 WRITE(1,1)NAME(I)
WRITE(1,1)LFED
WRITE(1,*)

```

```

IF(RD.EQ.1) GO TO 177
PRINT*, 'ENTER TEMPERATURE (IN K OR C OR F)'
READ(*,*) T
PRINT*, 'ENTER THE UNIT OF THE TEMPERATURE ( K OR C OR F)'
READ(*,1) TUI
IF(TUI.EQ.'C') T=T+273.15
IF(TUI.EQ.'F') T=(T+459.67)/1.8
PRINT*, T, ' K'
1  FORMAT(A)
177 CALL OUT(NN,0,COMP)
WRITE(6,1001) T
SEP=0.0
DO 315 I=1,NN
315 SED(I)=0.0
DO 212 M=1,N
SUMXX=0.0
SUMYY=0.0
IF(RD.EQ.1) GO TO 155
DO 112 I=1,NN-1
PRINT*, 'ENTER VAPOUR MOLE FRACTION(Y) OF ', NAME(I), ' AT DATA ', M
READ(IOD,*) YA(I,M)
112 PRINT*, YA(I,M)
DO 114 I=1,NN-1
PRINT*, 'ENTER EXPERIMENTAL VALUE OF LIQUID MOLE FRACTION'
PRINT*, 'OF ', NAME(I), ' IF AVAILABLE, IF NOT ENTER 0'
READ(IOD,*) XEA(I,M)
PRINT*, XEA(I,M)
IF(XEA(I,M).EQ.0) GO TO 155
114 CONTINUE
PRINT*, 'ENTER EXPERIMENTAL VALUE OF PRESSURE (ATM OR MM HG)'
PRINT*, 'IF IT IS NOT AVAILABLE ENTER 0'
PRINT*, '(PRESSURES FOR ALL DATA POINTS MUST HAVE SAME UNIT)'
READ(IOD,*) PE(M)
IF(M.GT.1) GO TO 123
PRINT*, 'ENTER UNIT OF THE PRESSURE (ATM OR MM HG)'
READ(IOD,1) PUI
123 IF(PUI.EQ.'MM HG') PE(M)=PE(M)/760
PRINT*, PE(M), ' ATM'
155 DO 139 I=1,NN-1
Y(I)=YA(I,M)
XE(I)=XEA(I,M)
SUMYY=SUMYY+Y(I)
SUMXX=SUMXX+XE(I)
139 CONTINUE
Y(NN)=1.0-SUMYY
XE(NN)=1.0-SUMXX
IF(XEA(1,M).EQ.0.0) XE(NN)=0.0

C
C
C
ITERATION FOR DEWP CALCULATION

IF(LFD.EQ.3) GO TO 471
DO 2 I=1,NN
X(I)=Y(I)
2 CONTINUE
P=1.0
CR=82.057
RT=82.057*T
CALL VAPS(ANTA,ANTB,ANTC,T,PS,NN)
CALL CONST(A,B,APR,BPR,NN,T,P,CR,PS,ANTA,ANTB,ANTC)
CALL LMV(PC,TC,ZAR,VL,T,YN)
CALL RFUGAC(Z,A,B,NN,T)
IN=0
103 IN=IN+1
WRITE(1,*) IN, ' SUMX= ', SUMX, ' P= ', P
SUMX=0.0

```

```

GO TO(72,73),LFD
72 CALL UNIQAC(X,T,NN,GAMA,HC)
GO TO 75
73 CALL UNIFAC(X,NN,T,GAMA,MU)
75 DO 5 I=1,NN
PCL=EXP(VL(I)*(P-PS(I))/RT)
FIY=FHI(I)*P
FILMP=GAMA(I)*PS(I)*FHS(I)*PCL
IF(T/TC(I).GE.1.8) FILMP=HC(I)
VK(I)=FILMP/FIY
CX(I)=Y(I)/VK(I)
SUMX=SUMX+CX(I)
5 CONTINUE
DO 6 I=1,NN
X(I)=CX(I)/SUMX
6 CONTINUE
DF=SUMX-1.000
IF(ABS(DF).LT.EPS) GO TO 107
IF(IN.GT.250) GO TO 107
P=P/SUMX
GO TO 100
107 PRINT*, ' NO SOLUTION FOR DEW PRESSURE CALCULATION AT DATA ',M
NT=NT-1
GO TO 212

```

```

C
C DEW PRESSURE CALCULATION APPLYING RAULT'S LAW
C

```

```

471 P=0.0
CALL VAPS(ANTA,ANTB,ANTC,T,PS,NN)
DO 441 I=1,NN
441 PT=PT+Y(I)/PS(I)
P=1/PT
DO 442 I=1,NN
X(I)=P+Y(I)/PS(I)
GAMA(I)=1.0
442 FHI(I)=1.0

```

```

C
C PRINT OF THE RESULTS
C

```

```

107 WRITE(1,*) 'PRESSURE= ',P
DO 686 I=1,NN,2
686 WRITE(1,*) 'X(',I,')= ',X(I), ' X(',I+1,')= ',X(I+1)
IF(PE(M).EQ.0.0) GO TO 316
SEP=SEP+ABS(P-PE(M))
316 DO 319 I=1,NN
IF(XE(I).EQ.0.0)GO TO 235
SED(I)=SED(I)+ABS(X(I)-XE(I))
319 EX(I)=(X(I)-XE(I))/XE(I)*100
235 DO 24 I=1,NN
IF(I.NE.1) GO TO 22
WRITE(6,1005) M,I,Y(I),XE(I),PE(M),P,GAMA(I),FHI(I),X(I),EX(I)
GO TO 24
22 WRITE(6,1006) I,Y(I),XE(I),GAMA(I),FHI(I),X(I),EX(I)
24 CONTINUE
1003 FORMAT(12X,I2,'.',1X,A20)
1001 FORMAT(/,4X,'TEMPERATURE=' ,F7.2,' K',//,17X,'GIVEN',33X,'CALCULATED'
+ //,11X,20(' - '),3X,42(' - '),//,'DATA',1X,'COMP',4X,
+ 'Y',5X,'XE',6X,'PE',7X,'P',9X,'GAMA',5X,'FHI',6X,'X',8X,'EX',//,79(' '))
1005 FORMAT(1X,I2,2X,I2,2X,F6.4,1X,F6.4,2X,F7.3,2X,F7.3,2X,F9.4,2X,F7.4
+ 3X,F6.4,3X,F6.2)
1006 FORMAT(5X,I2,2X,F6.4,1X,F6.4,20X,F9.4,2X,F7.4,3X,F6.4,3X,F6.2)
212 CONTINUE
DO 322 I=1,NN
IF(SED(I).EQ.0.0) GO TO 325
IF(NN.EQ.2.AND.I.EQ.2) GO TO 325

```

```

      SED(I)=SED(I)/NT
322 WRITE(6,1111) I,I,I,SED(I)
325 SEP=SEP/NT
      IF(SEP.EQ.0.0) GO TO 1256
      PRINT*, 'NUMBER OF DATA POINTS=',NT
      WRITE(6,1112) SEP
1111 FORMAT(/,10X, 'ERROR ON X(',I1,')= ABS(XE(',I1,')-X(',I1,'))/'
      +, 'DATA POINTS= ',F7.4)
1112 FORMAT(/,10X, 'ERROR ON PRESSURE= ABS(PE- $\bar{P}$ )/DATA POINTS= ',F7.4)
1256 RETURN
      END
-----
C
C SUBROUTINE DUBP(N,NN,ANTA,ANTB,ANTC,DEL,LFED,ZAR,RD,MJ,IOD,COMP)
C
C -----
      PARAMETER(K=9)
      PARAMETER(MMR=4)
      DIMENSION XU(K),XQ(K),GAMA(K),RQ(63,2),ZAR(K),VL(K),COMP(63)
      DIMENSION Y(K),XE(K),ANTA(K),ANTB(K),ANTC(K),HC(K),PE(100)
      DIMENSION YA(K,100),XEA(K,100),XQO(K),YE(K),YEA(K,100),X(K)
      DIMENSION A(K),B(K),Z(K),APR(K),BPR(K),XA(K,100),PS(K)
      DIMENSION FILMP(K),FIL(K),EY(K),CY(K),VK(K),DEL(K,K),SED(K)
      COMMON/UNIQ/ R(K),Q(K),QP(K),PU(K,K)
      COMMON/UNIFAC1/RB(K,MMR),QB(K,MMR),TABLE(63,63),KONT(K)
      COMMON/UNIFAC2/ITAB(K,MMR),KQR(K,MMR),MNR(K)
      COMMON/CONV/ TC(K),PC(K),OMEGA(K)
      COMMON/FUGV/APRM,BPRM,APRIJ(K,K),FHI(K)
      COMMON/RFUGV/FHS(K)
      COMMON NAME(K),LFED,TYPE
      CHARACTER*6 COMP,CM1,TUI,PUI
      CHARACTER*20 NAME
      CHARACTER*9 LFED,TYPE
C
C VAPOR AND LIQUID DATA
C
      PRINT*, 'PROGRAM STARTS ITERATION FOR BUBBLEP CALCULATION'
      PRINT*, '*****'
      EPS=0.0000001
      DO 56 I=1,NN
55 WRITE(1,1)NAME(I)
      WRITE(1,1)LFED
      NT=N
      IF(RD.EQ.1)GO TO 177
      PRINT*, 'ENTER TEMPERATURE(IN K OR F OR C)'
      READ(*,*) T
      PRINT*, 'ENTER UNIT OF THE TEMPERATURE (K OR F OR C)'
      READ(*,1) TUI
      IF(TUI.EQ.'C')T=T+273.15
      IF(TUI.EQ.'F')T=(T+459.67)/1.8
      PRINT*,T,' K'
      I FORMAT(A)
177 CALL OUT(NN,0,COMP)
      WRITE(6,1001) T
      SEP=0.0
      DO 388 I=1,NN
383 SED(I)=0.0
      DO 212 M=1,N
      SUMXX=0.0
      SUMYY=0.0
      IF(RD.EQ.1)GO TO 155
      DO 112 I=1,NN-1
      PRINT*, 'ENTER LIQUID MOLE FRACTION(X) OF ',NAME(I), 'AT DATA ',M
      READ(IOD,*) XA(I,M)
112 PRINT*,XA(I,M)
      DO 114 I=1,NN-1
-----

```

```

PRINT*, 'ENTER EXPERIMENTAL VALUE OF VAPOUR MOLE FRACTION'
PRINT*, 'OF ', NAME(I), 'IF AVAILABLE, IF NOT ENTER 0'
READ(IOD, *) YEA(I, M)
PRINT*, YEA(I, M)
IF(YEA(I, M).EQ.0) GO TO 155
114 CONTINUE
PRINT*, 'ENTER EXPERIMENTAL VALUE OF PRESSURE(IN ATM OR MM HG)'
PRINT*, 'IF IT IS NOT AVAILABLE ENTER 0'
PRINT*, '(PRESSURES FOR ALL DATA POINTS MUST HAVE SAME UNIT)'
READ(IOD, *) PE(M)
IF(M.GT.1) GO TO 123
PRINT*, 'ENTER UNIT OF THE PRESSURE( ATM OR MM HG)'
READ(IOD, 1) PUI
123 IF(PUI.EQ.'MM HG')PE(M)=PE(M)/760
PRINT*, PE(M), ' ATM'
155 DO 139 I=1, NN-1
X(I)=XA(I, M)
YE(I)=YEA(I, M)
SUMXX=SUMXX+X(I)
SUMYY=SUMYY+YE(I)
139 CONTINUE
X(NN)=1.0-SUMXX
YE(NN)=1.0-SUMYY
IF(YEA(1, M).EQ.0)YE(NN)=0.0

C
C
C
ITERATION FOR THE BUBBLEP CALCULATION

IF(LFD.EQ.3) GO TO 471
P=1.000
DO 2 I=1, NN
Y(I)=X(I)
2 CONTINUE
CR=82.057
RT=82.057*T
CALL VAPS(ANTA, ANTB, ANTC, T, PS, NN)
CALL CONST(A, B, APR, BPR, NN, T, P, CR, PS, ANTA, ANTB, ANTC )
CALL LMV(PC, TC, ZAR, VL, T, NN)
CALL RFUGAC(Z, A, B, NN, T)
GO TO(72, 73), LFD
72 CALL UNIQAC(X, T, NN, GAMA, HC)
GO TO 75
73 CALL UNIFAC(X, NN, T, GAMA, MU)
75 DO 5 I=1, NN
PCL=EXP(VL(I)*(P-PS(I))/RT)
FILMP(I)= GAMA(I)*PS(I)*FHS(I)*PCL
5 CONTINUE
IN=0
100 IN=IN+1
SUMY=0.0
CALL FUGAC(ZMIX, Y, APR, BPR, NN, T, P, CR, DEL)
DO 6 I=1, NN
IF(T/TC(I).GE.1.8) FILMP(I)=HC(I)
VK(I)=FILMP(I)/(FHI(I)*P)
CY(I)=X(I)*VK(I)
SUMY=SUMY+CY(I)
6 CONTINUE
WRITE(1, *)IN, ' SUMY=', SUMY, ' P= ', P
DO 7 I=1, NN
Y(I)=CY(I)/SUMY
7 CONTINUE
DF=SUMY-1.000
IF(ABS(DF).LT.EPS) GO TO 109
IF(IN.GT.250) GO TO 107
P=P*SUMY
GO TO 100
107 PRINT*, 'NO SOLUTION FOR BUBBLEP CALCULATION AT DATA ', M

```

```

      NT=NT-1
      GO TO 212

C
C   BUBBLE PRESSURE CALCULATION USING RAOULT'S LAW
C
471  P=0.0
      CALL VAPS(ANTA,ANTB,ANTC,T,PS,NN)
      DO 441 I=1,NN
441  P=P+PS(I)*X(I)
      DO 442 I=1,NN
      Y(I)=X(I)*PS(I)/P
      GAMA(I)=1.0
442  FHI(I)=1.0

C
C   PRINT OF THE RESULTS
C
109  WRITE(1,*) 'PRESSURE= ',P
      DO 686 I=1,NN,2
685  WRITE(1,*) 'Y(',I,')= ',Y(I), ' Y(',I+1,')= ',Y(I+1)
      IF(PE(M).EQ.0.0)GO TO 398
      SEP=SEP+ABS(PE(M)-P)
398  DO 397 I=1,NN
      IF(YE(I).EQ.0.0) GO TO 235
      SED(I)=SED(I)+ABS(YE(I)-Y(I))
397  EY(I)=((Y(I)-YE(I))/YE(I))*100
235  DO 24 I=1,NN
      IF(I.NE.1) GO TO 22
      WRITE(6,1005)M,I,X(I),YE(I),PE(M),P,GAMA(I),Y(I),FHI(I),EY(I)
      GO TO 24
22  WRITE(6,1006)I,X(I),YE(I),GAMA(I),Y(I),FHI(I),EY(I)
24  CONTINUE
4212 CONTINUE
1003 FORMAT(12X,I2,'.',1X,A20)
1001 FORMAT(/,4X,'TEMPERATURE= ',F7.2,' K',//,17X,'GIVEN',33X,'CALCULATED'
+ /,11X,20(' - '),3X,42(' - '),//,'DATA',1X,'COMP',4X,
+ 'X',5X,'YE',6X,'PE',7X,'P',9X,'GAMA',6X,'FHI',6X,'Y',8X,'EX',//,79('
1005 FORMAT(1X,I2,2X,I2,2X,F6.4,1X,F6.4,2X,F7.3,2X,F7.3,2X,F9.4,2X,F7.4
+ 3X,F6.4,3X,F6.2)
1006 FORMAT(5X,I2,2X,F6.4,1X,F6.4,20X,F9.4,2X,F7.4,3X,F6.4,3X,F6.2)
212  CONTINUE
      DO 385 I=1,NN
      IF(SED(I).EQ.0.0)GO TO 376
      IF(I.EQ.2.AND.NN.EQ.2) GO TO 376
      SED(I)=SED(I)/NT
385  WRITE(6,1111) I,I,I,SED(I)
376  IF(SEP.EQ.0.0)GO TO 1256
      SEP=SEP/NT
      PRINT*, 'NUMBER OF DATA POINTS=',NT
      WRITE(6,1112) SEP
1111 FORMAT(/,10X,'ERROR ON Y(',I1,')= ABS(YE(',I1,')-Y(',I1,')/DATA'
+ ', POINTS= ',F7.4)
1112 FORMAT(/,10X,'ERROR ON P= ABS(PE-P)/DATA POINTS= ',F7.4,1H0)
1255  RETURN
      END

C
C   -----
C   SUBROUTINE BUBT(N,NN,ANTA,ANTB,ANTC,DEL,LFD,ZAR,RD,MU,I0D,COMP)
C   -----
C
PARAMETER(K=9)
PARAMETER(MMR=4)
DIMENSION XU(K),XQ(K),GAMA(K),RQ(63,2),ZAR(K),VL(K),COMP(63)
DIMENSION Y(K),XE(K),ANTA(K),ANTB(K),ANTC(K),HC(K),TE(100)
DIMENSION YA(K,100),XEA(K,100),XQO(K),YE(K),YEA(K,100),X(K)
DIMENSION A(K),B(K),Z(K),APR(K),BPR(K),XA(K,100)
DIMENSION EY(K),CY(K),VK(K),DEL(K),PS(K),SED(K)

```

```

COMMON/UNIQ/ R(K),J(K),QP(K),PJ(K,K)
COMMON/UNIFAC1/R3(K,MMR),QB(K,MMR),TABLE(63,63),KONT(K)
COMMON/UNIFAC2/ITAB(K,MMR),KQR(K,MMR),MMR(K)
COMMON/CONV/ TC(K),PC(K),OMEGA(K)
COMMON/FUGV/APRM,BPRM,APRIJ(K,K),FHI(K)
COMMON/RFUGV/FHS(K)
COMMON NAME(K),LFED,TYPE
CHARACTER*6 COMP,CM1,TUI,PUI
CHARACTER*20 NAME
CHARACTER*9 LFED,TYPE

```

C
C
C

```

*****
PRINT*, 'PROGRAM STARTS ITERATION FOR BUBBLET CALCULATION'
PRINT*, '*****'
EPS=0.00001
DO 56 I=1,NN
55 WRITE(1,1)NAME(I)
   WRITE(1,1)LFED
   NT=N
   IF(RD.EQ.1)GO TO 177
   PRINT*, 'ENTER PRESSURE(IN ATM OR MM HG)'
   READ(*,*)P
   PRINT*, 'ENTER UNIT OF THE PRESSURE( ATM OR MM HG)'
   READ(*,1)PUI
   IF(PUI.EQ.'MM HG')P=P/760
   PRINT*,P,' ATM'
1   FORMAT(A)
177 CALL OUT(NN,J,COMP)
   WRITE(6,1001) P
   SET=0.0
   DO 388 I=1,NN
388 SED(I)=0.0
   DO 212 M=1,N
   SUMXX=0.
   SUMYY=0.
   IF(RD.EQ.1) GO TO 155
   DO 112 I=1,NN-1
   PRINT*, 'ENTER LIQUID MOLE FRACTION(X) OF ',NAME(I), 'AT DATA ',M
   READ(IOD,*) XA(I,M)
112 PRINT*,XA(I,M)
   DO 114 I=1,NN-1
   PRINT*, 'ENTER EXPERIMENTAL VALUE OF VAPOJR MOLE FRACTION'
   PRINT*, 'OF ',NAME(I), 'IF AVAILABLE,IF NOT ENTER 0'
   READ(IOD,*) YEA(I,M)
   PRINT*,YEA(I,M)
   IF(YEA(I,M).EQ.0) GO TO 155
114 CONTINUE
   PRINT*, 'ENTER EXPERIMENTAL VALUE OF TEMPERATURE(IN K OR C OR F)'
   PRINT*, 'IF IT IS NOT AVAILABLE ENTER 0'
   PRINT*, '(TEMPERATURES FOR ALL DATA POINTS MUST HAVE SAME UNIT)'
   READ(IOD,*) TE(M)
   IF(TE(M).EQ.0.0)GO TO 155
   IF(M.GT.1)GO TO 123
   PRINT*, 'ENTER UNIT OF THE TEMPERATURE( K OR F OR C)'
   READ(IOD,1) TUI
123 IF(TUI.EQ.'C')TE(M)=TE(M)+273.15
   IF(TUI.EQ.'F')TE(M)=(TE(M)+459.67)/1.8
   PRINT*,TE(M),' K'
155 DO 139 I=1,NN-1
   X(I)=XA(I,M)
   YE(I)=YEA(I,M)
   SUMXX=SUMXX+X(I)
   SUMYY=SUMYY+YE(I)
139 CONTINUE
   X(NN)=1.0-SUMXX

```

```

IF(YEA(1,M).EQ.0.0)YE(NN)=0.0
C
C ITERATION PART FOR THE BUBBLET CALCULATION
C
IRP=0
T=400
DO 2 I=1,NN
Y(I)=X(I)
2 CONTINUE
TLL=100.
NNN=2
IN=0
CR=82.057
100 IN=IN+1
RT=82.057*T
101 DO 149 J=1,NNN
IF(J.EQ.2)T=T+1.
CALL VAPS(ANTA,ANTB,ANTC,T,PS,NN)
IF(LFD.EQ.3)GO TO 471
CALL CONST(A,B,APR,BPR,NN,T,P,CR,PS,ANTA,ANTB,ANTC)
CALL LMV(PC,TC,ZAR,VL,T,NN)
CALL RFUGAC(Z,A,B,NN,T)
GO TO (72,73),LFD
72 CALL UNQUAC(X,T,NN,GAMA,HC)
GO TO 75
73 CALL UNIFAC(X,NN,T,GAMA,MU)
75 CALL FUGAC(ZMIX,Y,APR,BPR,NN,T,P,CR,DEL)
SUMY=0
DO 5 I=1,NN
PCL=EXP(VL(I)*(P-PS(I))/RT)
FIY=FHI(I)*P
FILMP=GAMA(I)*PS(I)*FHS(I)*PCL
IF(T/TC(I).GE.1.8)FILMP=HC(I)
IF(T/TC(I).GE.1.8)TLL=0.0
VK(I)=FILMP/FIY
CY(I)=VK(I)*X(I)
SUMY=SUMY+CY(I)
5 CONTINUE
IF(SUMY.GT.10000.OR.SUMY.LT.0.00001)GO TO 414
GO TO 472
C
C BUBBLE TEMPERATURE CALCULATION USING RAOULT'S LAW
C
471 SUMY=0.0
DO 442 I=1,NN
CY(I)=X(I)*PS(I)/P
442 SUMY=SUMY+CY(I)
C
472 IF(J.EQ.2)GO TO 147
F0=ALOG(SUMY)
GO TO 149
147 F1=ALOG(SUMY)
149 CONTINUE
DO 6 I=1,NN
Y(I)=CY(I)/SUMY
6 CONTINUE
WRITE(1,*)IN,'SUMY=',SUMY,'T=',T
IF(IN.EQ.250)GO TO 107
IF(ABS(F1).LE.EPS)GO TO 109
T=T-F1/(F1-F0)
T=T-1
PRINT*,T='T',T
IF(T.LE.LTT.OR.T.GT.700.)GO TO 414
GO TO 100
107 PRINT*,NO SOLUTION FOR BUBBLET CALCULATION AT DATA ',M

```

```

NI=NI-1
GO TO 212

C
414 IF(IRP.EQ.1)GO TO 107
IRP=1
T=300.
GO TO 100

C
C
C PRINT OF THE RESULTS

107 WRITE(1,*)'TEMPERATURE= ',T
DO 686 I=1,NN,2
686 WRITE(1,*)'Y(',I,')= ',Y(I),' Y(',I+1,')= ',Y(I+1)
IF(LFD.NE.3) GO TO 457
DO 568 I=1,NN
GAMA(I)=1.0
563 FHI(I)=1.0
457 IF(TE(M).EQ.0.0) GO TO 376
SET=SET+ABS(TE(M)-T)
376 DO 378 I=1,NN
IF(YE(I).EQ.0.0) GO TO 235
SED(I)=SED(I)+ABS(YE(I)-Y(I))
378 EY(I)=((Y(I)-YE(I))/YE(I))*100
235 DO 24 I=1,NN
IF(I.NE.1) GO TO 22
WRITE(6,1005)M,I,X(I),YE(I),TE(M),T,GAMA(I),FHI(I),Y(I),EY(I)
GO TO 24
22 WRITE(6,1006)I,X(I),YE(I),GAMA(I),FHI(I),Y(I),EY(I)
24 CONTINUE
4212 CONTINUE
1000 FORMAT(12X,I2,' ',1X,A20)
1001 FORMAT(/,2X,'PRESSURE= ',F7.3,' ATM',/,17X,'GIVEN',33X,'CALCULATED'
+ /,11X,20('-'),3X,42('-'),/,1X,'COMP',4X,
+ 'X',5X,'YE',6X,'TE',7X,'T',9X,'GAMA',6X,'FHI',6X,'Y',8X,'EY',/,)
1005 FORMAT(1X,I2,2X,I2,2X,F6.4,1X,F6.4,2X,F7.2,2X,F7.2,2X,F9.4,2X,F7.4
+ 3X,F6.4,3X,F6.2)
1006 FORMAT(5X,I2,2X,F6.4,1X,F6.4,20X,F9.4,2X,F7.4,3X,F6.4,3X,F6.2)
212 CONTINUE
DO 366 I=1,NN
IF(SED(I).EQ.0.0) GO TO 356
IF(I.EQ.2.AND.NN.EQ.2) GO TO 356
SED(I)=SED(I)/NT
365 WRITE(6,1111) I,I,I,SED(I)
356 IF(SET.EQ.0.0) GO TO 1256
PRINT*, 'NUMBER OF DATA POINTS=',NT
SET=SET/NT
WRITE(6,1112) SET
1111 FORMAT(/,10X,'ERROR ON Y(',I1,')= ABS(Y(',I1,')-YE(',I1,'))/'
+ 'DATA POINTS= ',F7.4)
1112 FORMAT(/,10X,'ERROR ON TEMPERATURE= ABS(T-TE)/DATA POINTS= ',
+F7.4)
1255 RETURN
END

C
C
C SUBROUTINE UNIQUAC(X,T,NN,GAM,HC)
C
C
C -----
PARAMETER(M=9)
DIMENSION X(M),GAM(M),RX(M),QX(M),HC(M),GAMN(M,M)
DIMENSION QPX(M),L(M),THP(M),TOIJ(M,M),F4N(M),TR(M)
COMMON/UNIQ/ R(M),Q(M),QP(M),PU(M,M)
COMMON/CONV/ TC(M),PC(M),OMEGA(M)

C
REAL L,LX
Z=10.

```

```

DO 51 I=1,NN
51 TR(I)=T/TC(I)
DO 52 I=1,NN
IF(TR(I).LT.1.8) GO TO 52
R(I)=0.0
Q(I)=0.0
QP(I)=0.0
52 CONTINUE
SUMRX=0.0
SUMQX=0.0
SUMQPX=0.0
SUMLX=0.0
DO 11 I=1,NN
IF(X(I).EQ.0.0) GO TO 11
RX(I)=R(I)*X(I)
QX(I)=Q(I)*X(I)
QPX(I)=QP(I)*X(I)
L(I)=(Z/2.)*X(I)-(R(I)-1.)
LX=L(I)*X(I)
SUMRX=SUMRX+RX(I)
SUMQX=SUMQX+QX(I)
SUMQPX=SUMQPX+QPX(I)
SUMLX=SUMLX+LX
11 CONTINUE
DO 21 I=1,NN
IF(X(I).EQ.0.0) GO TO 21
THP(I)=QPX(I)/SUMQPX
21 CONTINUE
DO 14 I=1,NN
DO 15 J=1,NN
IF(I.EQ.J) GO TO 75
IF(TR(I).GE.1.8.OR.TR(J).GE.1.8) GO TO 75
TOIJ(J,I)=EXP(-PU(J,I)/T)
GO TO 15
75 TOIJ(J,I)=1.0
15 CONTINUE
14 CONTINUE
DO 22 I=1,NN
IF(TR(I).GE.1.8) GO TO 55
SUM1=0.0
DO 23 J=1,NN
TOTP1=TOIJ(J,I)*THP(J)
SUM1=SUM1+TOTP1
23 CONTINUE
SUM3=0.0
DO 24 J=1,NN
SUM2=0.0
DO 25 K=1,NN
TOTP2=TOIJ(K,J)*THP(K)
SUM2=SUM2+TOTP2
25 CONTINUE
TOTP3=TOIJ(I,J)*THP(J)
TT30S=TOTP3/SUM2
SUM3=SUM3+TT30S
24 CONTINUE
TH=QX(I)/SUMQX
PH=RX(I)/SUMRX
A1=ALOG(PH/X(I))
A2=(Z/2)*Q(I)*ALOG(TH/PH)
A3=PH*SUMLX/X(I)
A4=QP(I)*ALOG(SUM1)
A5=QP(I)*SUM3
GAME=A1+A2+L(I)-A3-A4+QP(I)-A5
GAM(I)=EXP(GAME)
GO TO 22

```

C ACTIVITY COEFFICIENTS OF NONCONDENSABLE COMPONENTS ARE CALCULATED
C

```

55 SUMGAM=0.0
   SUMFH=0.0
   CALL RFUGNC(T,TC(I),PC(I),FHN(I))
   DO 61 JS=1,NN
   IF(TR(JS).GT.1.8) GO TO 61
   GAMN(I,JS)=PU(I,JS)+(PU(JS,I)/T)
   TH=QX(JS)/SUMQX
   SUMGAM=SUMGAM+GAMN(I,JS)*TH
   SUMFH=SUMFH+TH
61 CONTINUE
   HC(I)=SUMGAM+SUMFH*ALOG(FHN(I))
   HC(I)=EXP(HC(I))
   GAM(I)=EXP(SUMGAM)
22 CONTINUE
   RETURN
   END

```

C -----
C SUBROUTINE UNIFAC (XLIQ,NN,T,GAMA,MU)
C

```

-----
PARAMETER (K=9)
PARAMETER (MMR=4)
DIMENSION XLIQ(K),RLT(K),QLT(K),SUMTD(K),OME(K)
DIMENSION TETA(K),PHIC(K),EL(K),GCLN(K),TETAD(K,MMR),TETAN(K,MMR)
DIMENSION CONTR(K,K,MMR,MMR),PSI(K,K,MMR,MMR),SUMO2(MMR)
DIMENSION SUMO(K,MMR),ODDLN(K,MMR),SUMO3(K,MMR),XBIG(K,MMR)
DIMENSION TETARM(K,MMR),SUMONS(K,MMR),SUMOM1(K,MMR),SUMOM4(K,MMR)
DIMENSION ODLN(K,MMR),GRLN(K),GAMA(K)
COMMON/UNIFAC1/RB(K,MMR),QB(K,MMR),TABLE(63,63),KONT(K)
COMMON/UNIFAC2/ITAB(K,MMR),KQR(K,MMR),MNR(K)

```

```

C
DO 1 I=1,NN
SUMR=0
SUMQ=0
J=1
30 SUMR=SUMR+RB(I,J)*KQR(I,J)
   SUMQ=SUMQ+QB(I,J)*KQR(I,J)
   IF (J.EQ.KONT(I)) GO TO 20
   J=J+1
GO TO 30
20 RLT(I)=SUMR
   QLT(I)=SUMQ
1 CONTINUE
SUMRX=0
SUMQX=0
SUMMR=0
PME=2/3
DO 3 I=1,NN
SUMRX=SUMRX+XLIQ(I)*RLT(I)
SUMQX=SUMQX+XLIQ(I)*QLT(I)
SUMMR=SUMMR+XLIQ(I)*(RLT(I)**PME)
3 CONTINUE
IF(MU.EQ.1) GO TO 177
DO 4 I=1,NN
TETA(I)=XLIQ(I)*QLT(I)/SUMQX
PHIC(I)=XLIQ(I)*RLT(I)/SUMRX
EL(I)=5*(RLT(I)-2*QLT(I))-(RLT(I)-1.0)
4 CONTINUE
SUML=0
DO 5 I=1,NN
SUML=SUML+XLIQ(I)*EL(I)
5 CONTINUE
DO 6 I=1,NN

```

```

GC1=ALOG(PHIC(I)/XLIQ(I))
GC2=5*QLT(I)*ALOG(TETA(I)/PHIC(I))
GC3=EL(I)-SUML*PHIC(I)/XLIQ(I)
GCLN(I)=GC1+GC2+GC3
5 CONTINUE
GO TO 178

C
C FOR THE COMBINATORIAL PART MODIFIED UNIFAC APPLIED
C
177 DO 235 I=1,NN
OME(I)=XLIQ(I)*(RLT(I)**PME)/SUMMR
GCLN(I)=ALOG(OME(I)/XLIQ(I))+1-OME(I)/XLIQ(I)
235 CONTINUE

C
173 DO 666 I=1,NN
SUMTD(I)=0
665 CONTINUE
DO 7 I=1,NN
DO 15 J=1,KONT(I)
TETAD(I,J)=KQR(I,J)*QB(I,J)/MNR(I)
SUMTD(I)=SUMTD(I)+TETAD(I,J)
15 CONTINUE
7 CONTINUE
DO 8 I=1,NN
DO 14 J=1,KONT(I)
TETAN(I,J)=TETAD(I,J)/SUMTD(I)
14 CONTINUE
3 CONTINUE
DO 9 I=1,NN
DO 12 J=1,NN
DO 16 M=1,KONT(I)
DO 49 N=1,KONT(J)
ITB=ITAB(I,M)
ITA=ITAB(J,N)
C IF(MU.EQ.0) GO TO 179
C TABLE(ITB,ITA)=TABLE(ITB,ITA)+TABLE(ITB,ITA)*(T-293.15)+
C TABLE(ITB,ITA)*(T+ALOG(298.15/T)+T-298.15)
CONTR(I,J,M,N)=TABLE(ITB,ITA)
PSI(I,J,M,N)=EXP(0-CONTR(I,J,M,N)/T)
49 CONTINUE
15 CONTINUE
12 CONTINUE
9 CONTINUE
KK=MMR
DO 56 I=1,NN
DO 57 II=1,KK
SUMO2(II)=0
57 CONTINUE
MM=1
DO 55 J=1,KONT(I)
SUMOD1=0
DO 54 N=1,KONT(I)
SUMOD1=SUMOD1+TETAN(I,N)*PSI(I,I,N,MM)
54 CONTINUE
SUMO3(I,J)=SUMOD1
DO 52 JJ=1,KONT(I)
SUMTR=TETAN(I,J)*PSI(I,I,JJ,MM)/SUMO3(I,J)
SUMO(I,JJ)=SUMO2(JJ)+SUMTR
SUMO2(JJ)=SUMO(I,JJ)
52 CONTINUE
MM=MM+1
55 CONTINUE
55 CONTINUE
DO 58 I=1,NN
DO 59 J=1,KONT(I)
ODDLN(I,J)=QB(I,J)*(1-ALOG(SUMO3(I,J))-SJM(I,J))

```

```

57 CONTINUE
58 CONTINUE
SUMXB=0
DO 67 I=1,NN
XBIGD=SUMXB+XLIQ(I)*MNR(I)
SUMXB=XBIGD
67 CONTINUE
DO 61 I=1,NN
DO 62 J=1,KONT(I)
XBIGN=KQR(I,J)*XLIQ(I)
DO 63 II=1,NN
DO 64 JJ=1,KONT(II)
IF((ITAB(I,J).EQ.ITAB(II,JJ)).AND.(I.NE.II)) GO TO 81
GO TO 64
81 XBIGN=XBIGN+KQR(II,JJ)*XLIQ(II)
64 CONTINUE
63 CONTINUE
XBIG(I,J)=XBIGN/XBIGD
62 CONTINUE
61 CONTINUE
SUMT=0
DO 17 I=1,NN
DO 18 J=1,KONT(I)
SUMT=SUMT+XBIG(I,J)*QB(I,J)
DO 65 II=I,NN
DO 66 JJ=1,KONT(II)
ADT=XBIG(I,J)*QB(I,J)
IF((ITAB(I,J).EQ.ITAB(II,JJ)).AND.(I.NE.II)) SUMT=SUMT-ADT
65 CONTINUE
65 CONTINUE
13 CONTINUE
17 CONTINUE
DO 70 I=1,NN
DO 71 J=1,KONT(I)
TETARM(I,J)=XBIG(I,J)*QB(I,J)/SUMT
71 CONTINUE
70 CONTINUE
DO 83 I=1,NN
MM=1
DO 32 J=1,KONT(I)
SUMOD2=0
DO 73 II=1,NN
DO 72 JJ=1,KONT(II)
SUMOD2=SUMOD2+TETARM(II,JJ)*PSI(II,I,JJ,MM)
DO 21 I1=II,NN
DO 22 J1=1,KONT(I1)
SMNS=TETARM(I1,J1)*PSI(I1,I,J1,MM)
IF((ITAB(I1,J1).EQ.ITAB(II,JJ)).AND.(I1.NE.II)) GO TO 91
GO TO 22
91 SUMOD2=SUMOD2-SMNS
GO TO 72
22 CONTINUE
21 CONTINUE
72 CONTINUE
73 CONTINUE
SUMOM1(I,J)=SUMOD2
MM=MM+1
82 CONTINUE
83 CONTINUE
DO 78 I=1,NN
DO 79 J=1,KONT(I)
SUMON5(I,J)=0
79 CONTINUE
73 CONTINUE
DO 76 I=1,NN
MM=1

```

```

SUMON7=0
DO 23 II=1,NN
DO 24 JJ=1,KONT(II)
LO=1
DO 25 III=II,NN
DO 26 JJJ=1,KONT(III)
IF((ITAB(II,JJ).EQ.ITAB(III,JJJ)).AND.(II.NE.III))LO=0
25 CONTINUE
23 CONTINUE
SUMF=TETARY(II,JJ)*PSI(I,II,MM,JJ)*LO
SUMON7=SUMON7+SUMF/SUMOM1(II,JJ)
SUMOM4(I,J)=SUMON7
24 CONTINUE
23 CONTINUE
MM=MM+1
77 CONTINUE
75 CONTINUE
DO 84 I=1,NN
DO 85 J=1,KONT(I)
ODLN(I,J)=QB(I,J)*(1-ALOG(SUMOM1(I,J))-SUMOM4(I,J))
85 CONTINUE
84 CONTINUE
DO 86 I=1,NN
SUMG=0
DO 87 J=1,KONT(I)
GRLN(I)=KQR(I,J)*(ODLN(I,J)-ODDLN(I,J))+SUMG
SUMG=GRLN(I)
87 CONTINUE
85 CONTINUE
DO 89 I=1,NN
GAMA(I)=EXP(GRLN(I)+GCLN(I))
89 CONTINUE
RETURN
END

```

```

C
FUNCTION FINDR (CM,COMP)

```

```

C
CHARACTER*6 COMP(63),CM
DO 10 I=1,63
IF (COMP(I).EQ.CM) GO TO 20
1) CONTINUE
PRINT*, 'ILLEGAL COMPOUND NAME _ ENTER AGAIN'
FINDR=-1
RETURN
2) FINDR=I
RETURN
END

```

```

C
-----
SUBROUTINE CONST(A,B,APR,BPR,NN,T,P,R,PS,ANTA,ANTB,ANTC)

```

```

C
-----
PARAMETER(K=9)
COMMON /CONV/ TC(K),PC(K),OMEGA(K)
DIMENSION A(K),B(K),APR(K),BPR(K),PS(K)
DIMENSION ANTA(K),ANTB(K),ANTC(K)
REAL KAPA
DO 292 I=1,NN
IF(OMEGA(I).NE.0.0) GO TO 222
OMEGA(I)=ACEF(ANTA(I),ANTB(I),ANTC(I),TC(I),PC(I))
222 KAPA=0.37464+1.54226*OMEGA(I)-0.26992*OMEGA(I)**2
TR=T/TC(I)
ALPHA=(1+KAPA*(1-SQRT(TR)))**2
ATC=0.45724*R*R*TC(I)*TC(I)/PC(I)
APR(I)=ATC*ALPHA

```

```

IF (TR.GE.1.8) GO TO 292
A(I)=APR(I)*PS(I)/(R*R*T*T)
B(I)=BPR(I)*PS(I)/(R*T)
292 CONTINUE
RETURN
END

```

```

-----
SUBROUTINE FUGAC(ZMIX,Y,APR,BPR,NN,T,P,R,DEL)

```

```

-----
PARAMETER(K=9)
COMMON /FUGV/ APRM,BPRM,APRIJ(K,K),FHI(K)
DIMENSION Y(K),APR(K),BPR(K),DEL(K,K)
DO 392 I=1,NN
DO 492 J=1,NN
APRIJ(I,J)=(1-DEL(I,J))*SQRT(APR(I)*APR(J))
492 CONTINUE
392 CONTINUE
APRM=0
DO 4392 I=1,NN
DO 3392 J=1,NN
YAIJ=Y(I)*Y(J)*APRIJ(I,J)
APRM=APRM+YAIJ
3392 CONTINUE
BPRM=Y(I)*BPR(I)
4392 CONTINUE
AMIX=APRM*P/(R*R*T*T)
BMIX=BPRM*P/(R*T)
CALL ROOT(AMIX,BMIX,ZMIX)
A1=(ZMIX-1)/BPRM
A2=ALOG(ZMIX-BMIX)
A4=AMIX/(2*1.41*BMIX)
AK=(ZMIX+2.414*BMIX)/(ZMIX-0.41*BMIX)
A5=ALOG((ZMIX+2.414*BMIX)/(ZMIX-0.414*BMIX))
DO 111 J=1,NN
AY=0.0
DO 112 I=1,NN
AY=AY+Y(I)*APRIJ(I,J)
112 CONTINUE
A3=2*AY/APRM-BPR(J)/BPRM
FHI(J)=EXP(BPR(J)*A1-A2-A4*A3*A5)
111 CONTINUE
RETURN
END

```

```

-----
SUBROUTINE RFUGAC(Z,A,B,NN,T)

```

```

-----
PARAMETER(K=9)
COMMON /RFUGV/ FHS(K)
COMMON /CONV/ TC(K),PC(K),OMEGA(K)
DIMENSION Z(K),A(K),B(K)
DO 155 I=1,NN
IF (T/TC(I).GE.1.8) GO TO 155
CALL ROOT(A(I),B(I),Z(I))
A1=ALOG(Z(I)-B(I))
A2=A(I)/(2*1.41*B(I))
A3=ALOG((Z(I)+2.414*B(I))/(Z(I)-0.414*B(I)))
FHS(I)=EXP(Z(I)-1-A1-A2*A3)
155 CONTINUE
RETURN
END

```

L
C
C
SUBROUTINE ROOT(A,B,Z)

Z=1
INN=1
17J F=Z**3-(1-B)*Z**2+(A-3*B**2-2*B)*Z-(A*B-3**2-B**3)
FD=3*Z**2-2*(1-B)*Z+(A-3*B**2-2*B)
IF(INN.EQ.1) GO TO 150
IF(ABS(Z-ZOLD).LT.0.00001) GO TO 160
15J ZOLD=Z
Z=Z-F/FD
INN=INN+1
GO TO 170
16J RETURN
END

C
C
C
SUBROUTINE VAPS(ANTA,ANTB,ANTC,T,PIS,NN)

PARAMETER(K=9)
DIMENSION ANTA(K),ANTB(K),ANTC(K),PIS(K)
COMMON/CONV/TC(K),PC(K),OMEGA(K)
DO 76 I=1,NN
IF(T/TC(I).GE.1.8) GO TO 76
PIS(I)=EXP(ANTA(I)-ANTB(I)/(T+ANTC(I)))
PIS(I)=PIS(I)/760
76 CONTINUE
RETURN
END

C
C
C
SUBROUTINE LMV(PC,TC,ZAR,VL,T,NN)

PARAMETER(K=9)
DIMENSION PC(K),TC(K),ZAR(K),VL(K)
R=82.057
DO 5 I=1,NN
TR=T/TC(I)
IF(TR.GT.0.75) GO TO 10
T0=1+(1-TR)**(2./7.)
GO TO 20
10 T0=1.60+0.00693026/(TR-0.655)
20 VL(I)=R*TC(I)*ZAR(I)**T0/PC(I)
5 CONTINUE
RETURN
END

C
C
FUNCTION ACEF(ANA,ANB,ANC,TK,PK)

TW=0.7*TK
PSW=EXP(ANA-ANB/(TW+ANC))
PSW=PSW/760
ACEF=-LOG(PSW/PK)-1.00
RETURN
END

C
C
C
SUBROUTINE OUT(NN,IPT,COMP)

PARAMETER(M=9,MMR=4)
DIMENSION GSN(50),COMP(63)

```

COMMON/UNID/ R(M),Z(M),QP(M),PJ(M,M)
COMMON/UNIFAC1/RB(M,M),QB(M,M),TABLE(63,63),KONT(M)
COMMON/UNIFAC2/ITAB(M,M),KQR(M,M),MNR(M)
CHARACTER*20 NAME
CHARACTER*9 LFED
CHARACTER*6 TYPE, GROUP(50), COMP

```

```

C
IF(IPT.EQ.1)GO TO 250
WRITE(6,2222)
2222 FORMAT(//,9X,'TABLE( )          VLE CALCULATION RESULTS',/)
      K=NN/3
      IF(K.GT.(NN/3))K=K-1
      K=3*K
      EN=NN-K
22   DO 5 I=1,K,3
      5   WRITE(6,1115) I,NAME(I),I+1,NAME(I+1),I+2,NAME(I+2)
      IF(K.EQ.NN) GO TO 15
      GO TO (10,11)EN
10   WRITE(6,1125) NN,NAME(NN)
      GO TO 15
11   WRITE(6,1126) NN-1,NAME(NN-1),NN,NAME(NN)
15   WRITE(6,1116) TYPE
      IF(LFED.EQ.'RAOULT')GO TO 666
      WRITE(6,1117)LFED
      GO TO 919
665  WRITE(6,1118)
      GO TO 919
1115 FORMAT(4X,3(I2,'.',A20,1X))
1125 FORMAT(4X,I2,'.',A20,1X)
1125 FORMAT(4X,2(I2,'.',A20,1X))
1115 FORMAT(/,10X,'TYPE: ',A4)
1117 FORMAT(/,10X,'LIQUID PHASE NONIDEALITY IS CALCULATED BY '
+ ,A8,' EQUATION',/,10X,'VAPOUR PHASE NONIDEALITY IS CALCULATED BY ',
+ 'PENG ROBINSON EQUATION')
1113 FORMAT(/,10X,'CALCULATIONS ARE PERFORMED BY RAOULT'S LAW')
250  IF(LFED.EQ.'UNIFAC'.OR.LFED.EQ.'MODUNIFAC')GO TO 500
      WRITE(6,1000)
      DO 716 I=1,NN
715  WRITE(6,1001) I,R(I),Q(I),QP(I)
      WRITE(6,1002)
      DO 717 I=1,NN-1
      DO 717 J=I+1,NN
717  WRITE(6,1003) I,J,PJ(I,J),PU(J,I)
1003 FORMAT(///,15X,'UNIQUAC PARAMETERS',/,10X,'COMP',5X,'R',
+ 8X,'Q',8X,'QP',/,9X,6(' '),4X,3(' '),5X,3(' '),6X,4(' '))
1001 FORMAT(12X,I2,4X,F5.2,4X,F5.2,5X,F5.2)
1002 FORMAT(/,16X,'COMPI',4X,'COMPJ',11X,'A(I,J)',9X,'A(J,I)',/,
+ 15X,7(' '),2X,7(' '),9X,8(' '),7X,8(' '))
1003 FORMAT(18X,I2,7X,I2,10X,F8.2,7X,F8.2)
      GO TO 929
500  WRITE(6,1011) LFED
      ISI=0
      DO 726 I=1,NN
      DO 726 J=1,KONT(I)
      WRITE(6,1015) COMP(ITAB(I,J)),RB(I,J),QB(I,J)
      ISI=ISI+1
      GROUP(ISI)=COMP(ITAB(I,J))
725  GSN(ISI)=ITAB(I,J)
      WRITE(6,1016)
      DO 727 I=1,ISI
      DO 727 J=I+1,ISI
      IF(GROUP(I).EQ.GROUP(J)) GO TO 727
      WRITE(6,1017) GROUP(I),GROUP(J),TABLE(GSN(I),GSN(J)),
+  TABLE(GSN(J),GSN(I))
727  CONTINUE
1011 FORMAT(///,15X,A9,' PARAMETERS',/,15X,'GROUP',7X,'R',

```

```

+      8X,'Q',/,14X,/'-',),5X,3('-',),6X,3('-',)
1015 FORMAT(14X,A6,5X,F6.4,3X,F5.3)
1015 FORMAT(/,15X,'GROUP',5X,'GROUP',5X,'A(I,J)',5X,'A(J,I)',/,
+14X,7('-',),3X,7('-',),3X,8('-',),3X,8('-',))
1017 FORMAT(14X,A6,4X,A6,4X,F8.2,3X,F8.2)
929 WRITE(6,1256)
1255 FORMAT(/,80(' ',),/,80(' ',))
919 RETURN
END
-----
C
C SUBROUTINE INPUT(ANTA,ANTB,ANTC,ZAR,DEL,LFED,NN,SCN,NRA,COMP)
C
C -----
PARAMETER (K=9,LKK=100)
PARAMETER (MMR=4)
DIMENSION RQ(63,2),NS(LKK),DEL(K,K),ZAR(K),COMP(63)
DIMENSION ANTA(K),ANTB(K),ANTC(K)
DIMENSION TCD(LKK),PCD(LKK),ATA(LKK),ATB(LKK),ATC(LKK)
DIMENSION ZARD(LKK),DELD(10),OMEG(LKK)
DIMENSION RD(LKK),QD(LKK),QPD(20),UU(LKK,LKK)
COMMON/CONV/ TC(K),PC(K),OMEGA(K)
COMMON/UNIQ/ R(K),Q(K),QP(K),PU(K,K)
COMMON/UNIFAC1/R3(K,MMR),QB(K,MMR),TABLE(63,63),KONT(K)
COMMON/UNIFAC2/ITAB(K,MMR),KQR(K,MMR),MNR(K)
COMMON NAME(K),LFED,TYPE
CHARACTER*6 COMP,CM1
CHARACTER* 20 NAME,LFED,TYPE
CHARACTER* 20 CODE(LKK),CODEP(20),ICODE(LKK),IJCODE(LKK,LKK)
CHARACTER* 20 CODEPP(LKK),CODEDEL(10)
C
C READS PHYSICAL PROPERTIES OF COMPONENTS
C
IF(INPP.EQ.1) GO TO 389
INPP=1
CALL PF('GET','YDATAPP')
READ(2,*) PP
DO 201 I=1,PP
READ(2,1) CODEPP(I)
READ(2,*)TCD(I),PCD(I),ATA(I),ATB(I),ATC(I),ZARD(I),OMEG(I)
201 CONTINUE
DO 375 J=1,8
375 READ(2,1200) CODEDEL(J),DELD(J)
1200 FORMAT(A20,2X,F6.2)
389 DO 345 I=1,NN
DO 378 J=1,PP
IF(NAME(I).EQ.CODEPP(J)) GO TO 388
378 CONTINUE
PRINT*,'TC,PC,ANTA,ANTB,ANTC,ZAR, ARE NOT AVAILABLE'
PRINT*,'FOR THE ',NAME(I)
READ*,TC(I),PC(I),ANTA(I),ANTB(I),ANTC(I),ZAR(I)
GO TO 345
388 TC(I)=TCD(J)
PC(I)=PCD(J)
ANTA(I)=ATA(J)
ANTB(I)=ATB(J)
ANTC(I)=ATC(J)
ZAR(I)=ZARD(J)
OMEGA(I)=OMEG(J)
345 CONTINUE
C DO 495 I=1,NN
C 495 PRINT*,'TC(',I,')= ',TC(I),', PC(',I,')= ',PC(I),', ZAR(',I,')= ',
CZAR(I)
DO 595 I=1,NN
595 IF(NAME(I).EQ.'WATER') GO TO 497
GO TO 655
-----

```

```

DO 496 N=1,8
IF(NAME(J).EQ.CODEDEL(N)) GO TO 475
495 CONTINUE
GO TO 501
475 DEL(I,J)=DELD(N)
PRINT*, 'DEL= ', DEL(I,J)
501 CONTINUE
655 IF(LFD.EQ.2) GO TO 8
IF(LFD.EQ.3) GO TO 919
C
C UNIQAC PARAMETERS ARE READ IN THIS SECTION
C
IF(IUQ.EQ.1) GO TO 889
IUQ=1
CALL PF('GET','YDATAUQ')
READ(3,*) NUP
DO 181 I=1,NUP
181 READ(3,1250) CODE(I),RD(I),QD(I)
1251 FORMAT(2X,A20,1X,F5.2,2X,F4.2)
READ(3,*) NUPE
DO 182 I=1,NUPE
182 READ(3,1252) CODEP(I),QPD(I)
1252 FORMAT(2X,A20,2X,F4.2)
READ(3,*) NUIP
DO 183 I=1,NUIP
READ(3,1) ICODE(I)
1 FORMAT(A)
READ(3,*) NS(I)
DO 283 J=1,NS(I),2
READ(3,1254) IJCODE(I,J),UU(I,J),IJCODE(I,J+1),UU(I,J+1)
283 CONTINUE
1254 FORMAT(A20,2X,F8.2,2X,A20,2X,F8.2)
183 CONTINUE
889 DO 185 I=1,N
PRINT*, 'NAME(', I, ') = ', NAME(I)
DO 186 J=1,NUP
IF(NAME(I).EQ.CODE(J)) GO TO 35
186 CONTINUE
GO TO 199
35 R(I)=RD(J)
Q(I)=QD(J)
DO 187 KK=1,NUPE
IF(NAME(I).EQ.CODEP(KK)) GO TO 35
187 CONTINUE
QP(I)=Q(I)
C PRINT*, 'R= ', R(I), ' Q= ', Q(I), ' QP= ', QP(I)
GO TO 37
36 QP(I)=QPD(KK)
37 DO 188 J=1,NUIP
IF(ICODE(J).EQ.NAME(I)) GO TO 39
188 CONTINUE
38 PRINT*, 'INTERACTION PARAMETER OF COMPONENT ', NAME(I)
PRINT*, 'WITH OTHER COMPONENTS ARE NOT AVAILABLE'
GO TO 200
39 DO 191 KK=1,N
IF(NAME(KK).EQ.NAME(I)) GO TO 172
DO 192 L=1,NS(J)
IF(IJCODE(J,L).EQ.NAME(KK)) GO TO 42
192 CONTINUE
GO TO 38
42 PU(I,KK)=UU(J,L)
C PRINT*, 'PU(', I, KK, ') = ', PU(I,KK)
GO TO 191
172 PU(I,KK)=0.0
191 CONTINUE

```

```

18> CONTINUE
GO TO 919
197 PRINT*, 'R AND 3 PARAMETERS ARE NOT AVAILABLE FOR THE COMPONENT'
PRINT*, NAME(I)
203 PRINT*, '
PRINT*, 'THE CALCULATION WILL BE PERFORMED BY UNIFAC EQUATION'
LFD=2

```

```

C
C
C DATA INPUT FOR UNIFAC CALCULATION

```

```

8 IF(NRA.EQ.1)GO TO 919
IF(IUF.EQ.1)GO TO 875
IUF=1
CALL PF('GET','YDATUM')
DO 99 I=1,63
READ (UNIT=4,FMT=999,END=875) COMP(I),RQ(I,1),RQ(I,2)
997 FORMAT (A6,2X,F6.4,2X,F5.3)
99 CONTINUE
DO 998 I=1,63
READ (UNIT=4,FMT=997,END=875) (TABLE(I,J),J=1,10)
READ (UNIT=4,FMT=997,END=875) (TABLE(I,J),J=11,20)
READ (UNIT=4,FMT=997,END=875) (TABLE(I,J),J=21,30)
READ (UNIT=4,FMT=997,END=875) (TABLE(I,J),J=31,40)
READ (UNIT=4,FMT=997,END=875) (TABLE(I,J),J=41,50)
READ (UNIT=4,FMT=997,END=875) (TABLE(I,J),J=51,60)
READ (UNIT=4,FMT=993,END=875) (TABLE(I,J),J=61,63)
997 FORMAT (10F8.2)
993 FORMAT (3F8.2)
993 CONTINUE
875 DO 9 I=1,NN
PRINT*, '-----'
PRINT*, 'THE UNIFAC METHOD NEEDS FUNCTIONAL GROUPS OF COMPOUNDS'
PRINT*, 'THE CHOICE OF POSSIBLE GROUPS IS ARBITRARY AND LIMITED'
PRINT*, 'WITH THE FOLLOWING GROUPS'
PRINT*, (COMP(L),L=1,10)
PRINT*, (COMP(L),L=10,20)
PRINT*, (COMP(L),L=20,30)
PRINT*, (COMP(L),L=30,40)
PRINT*, (COMP(L),L=40,50)
PRINT*, (COMP(L),L=50,60)
PRINT*, (COMP(L),L=60,63)
PRINT*, '-----'
J=1
SUMC=0
133 PRINT*, 'ENTER THE NAME OF UNIFAC GROUPS IN COMPONENT ',NAME(I)
READ (*,10) CM1
PRINT*, CM1
13 FORMAT (A6)
IF (CM1.EQ.'END') GO TO 991
IF (CM1.EQ.'NEW') GO TO 991
IDX1=FINDR(CM1,COMP)
IF (IDX1.EQ.-1) GO TO 130
PRINT*, 'ENTER THE NUMBER OF GROUPS OF THIS KIND'
READ (*,11) KV
PRINT*, KV
11 FORMAT (I2)
ITAB(I,J)=IDX1
RB(I,J)=RQ(IDX1,1)
QB(I,J)=RQ(IDX1,2)
KQR(I,J)=KV
MNR(I)=SUMC+KV
SUMC=MNR(I)
J=J+1
GO TO 130
991 KONT(I)=J-1
9 CONTINUE

```

```
C      DO 775 I=1,NN
C      DO 775 M=1,KONT(I)
C      DO 775 J=1,NN
C      DO 775 N=1,KONT(J)
C      PRINT*, 'TABLE(' ,I,M,J,N,')= ',TABLE(ITAB(I,M),ITAB(J,N))
C 775 CONTINUE
C 919 RETURN
C      END
C
C      SUBROUTINE RFUGNC(T,TC,PC,FHN)
C
C      TR=T/TC
C      FHNOP=7.224-7.534/TR-2.548*ALOG(TR)
C      FHN=PC*EXP(FHNOP)
C      RETURN
C      END
18.23.56.UCLP, BU, P04      1.698<LNS.
```